



1.2 A Programmable Device Power Supply with Integrated 16-Bit Level Setting DACs

AD5560

FEATURES

- Programmable device power supply (DPS)
 - FV, MI, MV, FNMV functions
- 5 internal current ranges (on-chip R_{SENSE})
 - $\pm 5 \mu\text{A}$, $\pm 25 \mu\text{A}$, $\pm 250 \mu\text{A}$, $\pm 2.5 \text{ mA}$, $\pm 25 \text{ mA}$
- 2 external high current ranges (external R_{SENSE})
 - EXTFORCE1: $\pm 1.2 \text{ A}$ maximum
 - EXTFORCE2: $\pm 500 \text{ mA}$ maximum
- Integrated programmable levels
 - All 16-bit DACs: force DAC, comparator DACs, clamp DACs, offset DAC, OSD DAC, DGS DAC
- Programmable Kelvin clamp and alarm
- Offset and gain correction registers on-chip
- Ramp mode on force DAC for power supply slewing
- Programmable slew rate feature, $1 \text{ V}/\mu\text{s}$ to $0.3 \text{ V}/\mu\text{s}$
- DUTGND Kelvin sense and alarm
- 25 V FV span with asymmetrical operation within $-22 \text{ V}/+25 \text{ V}$

GENERAL DESCRIPTION

The AD5560 is a high performance, highly integrated device power supply consisting of programmable force voltages and measure ranges. This part includes the required DAC levels to set the programmable inputs for the drive amplifier as well as clamping and comparator circuitry. Offset and gain correction is included on-chip for DAC functions. A number of programmable measure current ranges are available, five internal fixed ranges and two external customer-selectable ranges (EXTFORCE1 and EXTFORCE2) that can supply currents up to $\pm 1.2 \text{ A}$ and $\pm 500 \text{ mA}$, respectively. The voltage range possible at this high current level is limited by headroom and the maximum power

- On-chip comparators
- Gangable for higher current
- Guard amplifier
- System PMU connections
- Current clamps
- Die temperature sensor and shutdown feature
- On-chip diode thermal array
- Diagnostic register allows access to internal nodes
- Open-drain alarm flags (temperature, current clamp, Kelvin alarm)
- SPI-/MICROWIRE-/DSP-compatible interface
- 64-lead (10 mm \times 10 mm) TQFP with exposed pad (on top)

APPLICATIONS

- Automatic test equipment (ATE)
- Device power supply

dissipation. Current ranges in excess of $\pm 1.2 \text{ A}$ or at high current and high voltage combinations can be achieved by paralleling or ganging multiple DPS devices. Open-drain alarm outputs are provided in the event of overcurrent, overtemperature, or Kelvin alarm on either the SENSE or DUTGND lines.

The DPS functions are controlled via a simple 3-wire serial interface compatible with SPI, QSPI™, MICROWIRE™, and DSP interface standards running at clock speeds up to 50 MHz.

Rev. A

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106, U.S.A.
Tel: 781.329.4700 www.analog.com
Fax: 781.461.3113 ©2008 Analog Devices, Inc. All rights reserved.

TABLE OF CONTENTS

Features	1	Optimizing Performance for a Known Capacitor Using Autocompensation Mode.....	36
Applications.....	1	Adjusting the Autocompensation Mode	37
General Description	1	Dealing with Parallel Load Capacitors	37
Revision History	3	DAC Levels.....	37
Functional Block Diagram	4	Force and Comparator DACs	37
Specifications.....	5	Clamp DACs	37
Timing Characteristics	13	OSD DAC	38
Timing Diagrams.....	13	DUTGND DAC.....	38
Absolute Maximum Ratings.....	15	Offset DAC.....	38
Thermal Resistance	15	Offset and Gain Registers.....	38
ESD Caution.....	15	Reference Selection	39
Pin Configuration and Function Descriptions.....	16	Choosing AV_{DD}/AV_{SS} Power Supply Rails	39
Typical Performance Characteristics	18	Choosing $HCAV_{SSX}$ and $HCAV_{DDX}$ Supply Rails	39
Terminology	26	Power Dissipation.....	39
Theory of Operation	27	Package Composition and Maximum Vertical Force.....	40
Force Amplifier.....	27	Slew Rate Control.....	40
DAC Reference Voltage (VREF).....	27	Programmable Slew Rate	40
Open-Sense Detect (OSD) Alarm and Clamp	27	Ramp Function	40
Device Under Test Ground (DUTGND).....	27	Serial Interface	42
GPO.....	28	SPI Interface	42
Comparators.....	28	SPI Write Mode	42
Current Clamps	28	SDO Output	42
Short-Circuit Protection.....	28	RESET Function	42
Guard Amplifier	28	BUSY Function	42
Compensation Capacitors	28	LOAD Function.....	42
Current Range Selection.....	29	Register Update Rates	43
High Current Ranges	29	Control Registers	44
Ideal Sequence for Gang Mode.....	30	DPS and DAC Addressing	44
Compensation for Gang Mode	30	Readback Mode	55
System Force/Sense Switches	30	DAC Readback.....	55
Die Temperature Sensor and Thermal Shutdown	31	Power-On Default	55
Measure Output (MEASOUT)	31	Using the $HCAV_{DDX}$ and $HCAV_{SSX}$ Supplies	57
V_{MID} Voltage	31	Power Supply Sequencing	57
Force Amplifier Stability.....	34	Required External Components.....	58
Poles and Zeros in a Typical System	35	Power Supply Decoupling	59
Minimizing the Number of External Compensation Components.....	35	Outline Dimensions	60
Extra Poles and Zeros in the AD5560.....	35	Ordering Guide	60
Compensation Strategies	36		

REVISION HISTORY

12/08—Rev. 0 to Rev. A

Changes to Figure 1.....4

Changes to Table 14

Changes to Table 213

Changes to Table 315

Changes to Open-Sense Detect (OSD) Alarm and Clamp.....27

Changes to Figure 5330

Change to gm Maximum Rating, Table 1334

Changes to Table 1946

Changes to Bit 7, Bit 8 Functions, Table 21.....48

Changes to Power Supply Decoupling Section59

11/08—Revision 0: Initial Version



Rev. A | Page 4 of 60

SPECIFICATIONS

$HCAV_{DDX} \leq (AV_{SS} + 33 \text{ V})$, $HCAV_{DDX} \leq AV_{DD}$, $HCAV_{SSX} \geq AV_{SS}$, $AV_{DD} \geq 8 \text{ V}$, $AV_{SS} \leq -5 \text{ V}$, $|AV_{DD} - AV_{SS}| \geq 16 \text{ V}$ and $\leq 33 \text{ V}$, $DV_{CC} = 2.3 \text{ V}$ to 5.5 V , $V_{REF} = 5 \text{ V}$, gain (m), offset (c), and DAC offset registers are at default values; AGND = DGND = 0 V; $T_J = 25^\circ\text{C}$ to 90°C , maximum specifications, unless otherwise noted. FSV is full-scale voltage, FSVR is full-scale voltage range, FSC is full-scale current, FSCR is full-scale current range.

Table 1.

Parameter	Min	Typ	Max	Unit	Test Conditions/Comments
FORCE VOLTAGE					
Force Output Voltage ¹					
EXTFORCE1	$AV_{SS} + 2.25$ $HCAV_{SS1} + 1.75$		$AV_{DD} - 2.25$ $HCAV_{DD1} - 1.75$	V	External current range, EXTFORCE1; allow $\pm 500 \text{ mV}$ for external R_{SENSE} voltage drop.
EXTFORCE2	$AV_{SS} + 2.25$ $HCAV_{SS2} + 1.75$		$AV_{DD} - 2.25$ $HCAV_{DD2} - 1.75$	V	External current range, EXTFORCE2; allow $\pm 500 \text{ mV}$ for external R_{SENSE} voltage drop.
FORCE	$AV_{SS} + 2.75$		$AV_{DD} - 2.75$	V	Internal current ranges, includes $\pm 500 \text{ mV}$ for internal R_{SENSE} voltage drop.
Headroom/Footroom ¹	-2.75		+2.75	V	Internal current ranges to AV_{DD}/AV_{SS} , includes $\pm 500 \text{ mV}$ for internal R_{SENSE} voltage drop.
Headroom/Footroom ¹	-2.25		+2.25	V	External current ranges, EXTFORCE1/EXTFORCE2 to $HCAV_{DDX}$ and $HCAV_{SSX}$ supplies; includes $\pm 500 \text{ mV}$ for external R_{SENSE} voltage drop.
Force Output Voltage Span	-22		+25	V	May be a skewed range, but within headroom requirements and maximum power dissipation for current range.
Forced Voltage Linearity Error	-2		+2	mV	Uncalibrated, use c register to calibrate, measured at midscale. Standard deviation = $23 \mu\text{V}/^\circ\text{C}$. Uncalibrated, use m register to calibrate. Standard deviation = $3 \text{ ppm}/^\circ\text{C}$. Clamps off.
Forced Voltage Offset Error	-50		+50	mV	
Forced Voltage Offset Error Tempco ¹		27		$\mu\text{V}/^\circ\text{C}$	
Forced Voltage Gain Error	-25		+25	mV	
Forced Voltage Gain Error Tempco ¹		4		$\text{ppm}/^\circ\text{C}$	
Short Circuit Current Limit ²					
EXTFORCE1	-3.5	± 2.7	+3.5	A	Positive and negative dc short circuit current.
EXTFORCE2	-1.25	± 0.9	+1.25	A	Positive and negative dc short circuit current.
FORCE	-75	± 50	+75	mA	$\pm 25 \text{ mA}$ range, positive and negative dc short circuit current.
	-20	± 10	+20	mA	All other ranges, positive and negative dc short circuit current.
Active C_{FX} Buffer	-64		+64	mA	EXTFORCE1 range, $\pm 1 \text{ A}$ load current change. EXTFORCE2 range, $\pm 0.5 \text{ A}$ load current change. 1.2 A load step into $30 \mu\text{F}$ DUT capacitance ($10 \text{ m}\Omega$ ESR).
DC Load Regulation ¹	-1		+1	mV	
	-0.4		+0.4	mV	
Load Transient Response ¹		70		mV	1.2 A load step into $30 \mu\text{F}$ DUT capacitance ($10 \text{ m}\Omega$ ESR).
NSD ¹		350		$\text{nV}/\sqrt{\text{Hz}}$	Measured at 1 kHz, at output of FORCE.
MEASURE CURRENT RANGES					
Internal Sense Resistors ¹		100		k Ω	Sense resistors are trimmed to within 1%, nominal $\pm 500 \text{ mV } V_{RSENSE}$.
		20		k Ω	$\pm 5 \mu\text{A}$ current range.
		2		k Ω	$\pm 25 \mu\text{A}$ current range.
		200		Ω	$\pm 250 \mu\text{A}$ current range.
		20		Ω	$\pm 2.5 \text{ mA}$ current range.

AD5560

Parameter	Min	Typ	Max	Unit	Test Conditions/Comments
Measure Current Ranges					Specified current ranges with $V_{REF} = 5\text{ V}$ and MI gain = 20, or with $V_{REF} = 2.5\text{ V}$ and MI gain = 5.
		±5		μA	Set using internal sense resistor.
		±25		μA	Set using internal sense resistor.
		±250		μA	Set using internal sense resistor.
		±2.5		mA	Set using internal sense resistor.
		±25		mA	Set using internal sense resistor.
		±500		mA	EXTFORCE2, set by user with external sense resistor, limited by headroom requirements and maximum power dissipation.
		±1200		mA	EXTFORCE1, set by user with external sense resistor, limited by headroom requirements and maximum power dissipation.
MEASURE CURRENT					All offset DAC/supply combinations settings, all gain settings are measure current = $(I_{DUT} \times R_{SENSE} \times \text{MI gain})$, unless otherwise noted.
Differential Input Voltage Range ¹	−0.64		+0.64	V	Maximum voltage across R_{SENSE} , MI gain = 20.
	−0.7		+0.7	V	Maximum voltage across R_{SENSE} , MI gain = 10.
Output Voltage Span ¹		25		V	Measure current block alone (internal node).
Offset Error	−1		+1	% FSC	At 0 A, MI gain = 20, MEASOUT gain = 1.
Offset Error Tempco ¹		−1		ppm of FSC/°C	Standard deviation = 13 ppm/°C.
Offset Error	−1.5		+1.5	% FSC	At 0 A, MI gain = 10, MEASOUT gain = 1.
Offset Error Tempco ¹		−1		ppm of FSC/°C	Standard deviation = 13 ppm/°C.
Offset Error	−1.5		+1.5	% FSC	At 0 A, MI gain = 20, MEASOUT gain = 0.2.
Offset Error Tempco ¹		3		ppm of FSC/°C	Standard deviation = 13 ppm/°C.
Offset Error	−3		+3	% FSC	At 0 A, MI gain = 10, MEASOUT gain = 0.2.
Offset Error Tempco ¹		8		ppm of FSC/°C	Standard deviation = 15 ppm/°C.
Gain Error	−2		+2	% FSC	Internal current ranges, all gain settings.
Gain Error ¹	−1		+1	% FSC	External current ranges, excluding R_{SENSE} .
Gain Error Tempco ¹		20		ppm/°C	Standard deviation = 5 ppm/°C.
MEASOUT Gain = 1					All supply conditions.
Linearity Error	−0.01		+0.01	% FSCR	MI gain = 20 and 10.
MEASOUT Gain = 0.2					Nominal supply (±16.5 V, 0x8000 offset DAC).
Linearity Error	−0.0375		+0.0375	% FSCR	MI gain = 20.
Linearity Error	−0.025		+0.025	% FSCR	MI gain = 10.
MEASOUT Gain = 0.2					Low supply (−25 V/+8 V, 0xD4EB offset DAC).
Linearity Error	−0.075		+0.075	% FSCR	MI gain = 20.
Linearity Error	−0.175		+0.175	% FSCR	MI gain = 10.
MEASOUT Gain = 0.2					High supply (−5 V/+28 V, 0xD1D offset DAC).
Linearity Error	−0.075		+0.075	% FSCR	MI gain = 20.
Linearity Error	−0.075		+0.075	% FSCR	MI gain = 10.
Common-Mode Error	−0.005		+0.005	%FSVR/V	% of FS change at measure output per volts change in DUT voltage.
NSD ¹		900		nV/√Hz	MI gain = 20, MEASOUT gain = 1, measured at MEASOUT @ 1 kHz, inputs grounded.
		550		nV/√Hz	MI gain = 10, MEASOUT gain = 1, measured at MEASOUT @ 1 kHz, inputs grounded.
		170		nV/√Hz	MI gain = 20, MEASOUT gain = 0.2, measured at MEASOUT @ 1 kHz, inputs grounded.
		110		nV/√Hz	MI gain = 10, MEASOUT gain = 0.2, measured at MEASOUT @ 1 kHz, inputs grounded.

Parameter	Min	Typ	Max	Unit	Test Conditions/Comments
MEASURE VOLTAGE					MEASOUT gain 1 and MEASOUT gain 0.2.
Measure Voltage Range ¹	$AV_{SS} + 2.75$		$AV_{DD} - 2.75$	V	All voltage ranges.
Gain Error	-0.1		+0.1	% FS	
Gain Error Tempco ¹		3		ppm/°C	Standard deviation = 2 ppm/°C.
MEASOUT Gain = 1					
Linearity Error	-2		+2	mV	
Offset Error	-12		+12	mV	
Offset Error Tempco ¹		2		μV/°C	Standard deviation = 12 μV/°C.
NSD ¹		100		nV/√Hz	@ 1 kHz, at MEASOUT, inputs grounded.
MEASOUT Gain = 0.2					
Linearity Error	-2		+2	mV	Referred to MV input, nominal supply (± 16.5 V, 0x8000 offset DAC).
	-4		+24	mV	Referred to MV input, low supply (-25 V/+8 V, 0xD4EB offset DAC).
	-2		+8	mV	Referred to MV input, high supply (-5 V/+28 V, 0xD1D offset DAC).
Offset Error	-30		+20	mV	Referred to MV output.
Offset Error Tempco ¹		10		μV/°C	Standard deviation = 12 μV/°C, referred to MV output.
NSD ¹		50		nV/√Hz	@ 1 kHz, at MEASOUT, inputs grounded.
COMBINED LEAKAGE					Includes SYS_SENSE, SYS_FORCE, EXTFORCE1, EXTFORCE2, EXTMEASIH1, EXTMEASIH2, EXTMEASIL, FORCE, and SENSE; measured with $\overline{PD} = 1$, $\overline{SW-INH} = 0$ (power up and tristate).
Leakage Current	-37.5		+37.5	nA	
Leakage Current Tempco ¹	-30	±0.1	+30	nA/°C	$T_J = 25^\circ\text{C}$ to 70°C .
SENSE INPUT					
Leakage Current	-2.5		+2.5	nA	Measured with $\overline{PD} = 1$, $\overline{SW-INH} = 0$ (power-up and tristate).
Leakage Current Tempco ¹		±0.01		nA/°C	
Pin Capacitance ¹		10		pF	
EXTMEASIH1, EXTMEASIH2, EXTMEASIL					
Leakage Current	-2.5		+2.5	nA	Measured with $\overline{PD} = 1$, $\overline{SW-INH} = 0$ (power-up and tristate).
Leakage Current Tempco ¹		±0.01		nA/°C	
Pin Capacitance ¹		5		pF	
FORCE OUTPUT, FORCE					
Maximum Current Drive ¹	-30		+30	mA	
Leakage Current	-10		+10	nA	Measured with $\overline{PD} = 1$, $\overline{SW-INH} = 0$ (power-up and tristate).
Leakage Current Tempco ¹		±0.03		nA/°C	
Pin Capacitance ¹		120		pF	
EXTFORCE1 OUTPUTS					
Maximum Current Drive ¹	-1200		+1200	mA	Set with external sense resistor, limited by headroom and power dissipation.
Leakage Current	-7.5		+7.5	nA	Measured with $\overline{PD} = 1$, $\overline{SW-INH} = 0$ (power-up and tristate).
Leakage Current Tempco ¹		±0.03	±0.06	nA/°C	
Pin Capacitance ¹		275		pF	
EXTFORCE2 OUTPUTS					
Maximum Current Drive ¹	-500		+500	mA	Set with external sense resistor, limited by headroom and power dissipation.
Leakage Current	-5		+5	nA	Measured with $\overline{PD} = 1$, $\overline{SW-INH} = 0$ (power-up and tristate).
Leakage Current Tempco ¹		±0.02	±0.05	nA/°C	
Pin Capacitance ¹		100		pF	

AD5560

Parameter	Min	Typ	Max	Unit	Test Conditions/Comments
SYS_SENSE					
Voltage Range	AV _{SS}		AV _{DD}	V	SYS_SENSE high-Z, force amplifier inhibited. AV _{DD} = 16.5 V, AV _{SS} = -16.5 V.
Leakage Current	-2.5		+2.5	nA	
Leakage Current Tempco ¹		±0.005	±0.025	nA/°C	
Path On Resistance			280	Ω	
Pin Capacitance ¹		5		pF	
SYS_FORCE					
Voltage Range	AV _{SS}		AV _{DD}	V	SYS_FORCE high-Z, force amplifier inhibited. AV _{DD} = 16.5 V, AV _{SS} = -16.5 V.
Current Carrying Capability ¹	-25		+25	mA	
Leakage Current	-2.5		+2.5	nA	
Leakage Current Tempco ¹		±0.005	±0.025	nA/°C	
Path On Resistance			35	Ω	
Pin Capacitance ¹		5		pF	
SYS_DUTGND					
Voltage Range	AV _{SS}		AV _{DD}	V	AV _{DD} = 16.5 V, AV _{SS} = -16.5 V.
Path On Resistance		300	400	Ω	
CURRENT CLAMP					
Clamp Accuracy	Programmed clamp value		Programmed clamp value + 10	% of FS	MI gain = 20, with clamp separation of 2 V, and 1 V separation from AGND/0 A. MI gain = 10, with clamp separation of 2 V, and 1 V separation from AGND/0 A. 10% of FSCR (MI gain = 20), 20% of FSCR (MI gain = 10) restriction to prevent both clamps activating together. 5% of FSCR (MI gain = 20), 10% of FSCR (MI gain = 10), restriction to avoid impinging on FV before programmed level. 5% of FSCR (MI gain 20), 10% of FSCR (MI gain = 10), restriction to avoid impinging on FV before programmed level. Measured from <u>BUSY</u> going low to visible clamping. Measured from <u>BUSY</u> going low to visible recovery. Time for <u>CLALM</u> to flag.
	Programmed clamp value		Programmed clamp value + 20	% of FS	
VCLL to VCLH ¹	2			V	
VCLL to 0 A ¹	1			V	
VCLH to 0 A ¹	1			V	
Clamp Activation Response Time ¹		20	100	μs	
Clamp Recovery ¹		2	5	μs	
Alarm Delay ¹		50		μs	
FORCE AMPLIFIER					
Slew Rate ¹		1		V/μs	Fastest slew rate, controlled via serial interface. Slowest slew rate, controlled via serial interface.
		0.312		V/μs	
Maximum Stable Load Capacitance ¹			160	μF	
Voltage Overshoot/Undershoot ¹			5	%	Of programmed value (≥1 V).
SETTLING TIME (FORCE AMPLIFIER)	Compensation Register 1 = 0x4880 (229 nF to 380 nF, ESR 74 to 140 mΩ)				To within 10 mV of programmed value.
FV (1200 mA EXTFORCE1 Range) ¹		16	25	μs	3.7 V step, R _{DUT} = 2.4 Ω, C _{DUT} = 0.22 μF full dc load.
FV (900 mA EXTFORCE1 Range) ¹		18	30	μs	8 V step, R _{DUT} = 8.8 Ω, C _{DUT} = 0.22 μF, full dc load.
FV (500 mA EXTFORCE2 Range) ¹		34	53	μs	15 V step, R _{DUT} = 30 Ω, C _{DUT} = 0.22 μF, full dc load.
FV (300 mA EXTFORCE2 Range) ¹		25	50	μs	10 V step, R _{DUT} = 33.3 Ω, C _{DUT} = 0.22 μF, full dc load.
FV (25 mA Range) ^{1, 2}		125	180	μs	20 V step, R _{DUT} = 800 Ω, C _{DUT} = 0.22 μF, full dc load.
FV (2.5 mA Range) ^{1, 2}		300	500	μs	10 V step, R _{DUT} = 4 kΩ, C _{DUT} = 0.22 μF, full dc load.
FV (250 μA Range) ^{1, 2}		300	500	μs	10 V step, R _{DUT} = 40 kΩ, C _{DUT} = 0.22 μF, full dc load.
FV (25 μA Range) ^{1, 2}		400	600	μs	10 V step, R _{DUT} = 400 kΩ, C _{DUT} = 0.22 μF, full dc load.
FV (5 μA Range) ^{1, 2}		20	40	μs	1 V step, R _{DUT} = 200 kΩ, C _{DUT} = 0.22 μF, full dc load.
	Compensation Register 1 = 0x8880 (1.7 μF to 2.9 μF, ESR 74 to 140 mΩ)				

Parameter	Min	Typ	Max	Unit	Test Conditions/Comments
FV (180 mA EXTFORCE1 Range) ¹		16	25	μs	3 V step, C _{DUT} = 2.2 μF, full dc load.
FV (100 mA EXTFORCE2 Range) ¹		60	80	μs	8 V step, C _{DUT} = 2.2 μF, full dc load.
		Compensation Register 1 = 0x8880 (7.9 μF to 13 μF, ESR 74 to 140 mΩ)			
FV (180 mA EXTFORCE1 Range) ¹		55	70	μs	3 V step, C _{DUT} = 10 μF, full dc load.
FV (100 mA EXTFORCE2 Range) ¹		210	260	μs	8 V step, C _{DUT} = 10 μF, full dc load.
		Compensation Register 1 = 0xC880 (13 μF to 22 μF, ESR 74 to 140 mΩ)			
FV (180 mA EXTFORCE1 Range) ¹		65	80	μs	3 V step, C _{DUT} = 20 μF, full dc load.
FV (100 mA EXTFORCE2 Range) ¹		310	370	μs	8 V step, C _{DUT} = 20 μF, full dc load.
SETTLING TIME (FV, MEASURE CURRENT)		Compensation Register 1 = 0x4880 (229 nF to 380 nF, ESR 74 to 140 mΩ)			To within 10 mV of programmed value.
MI (1200 mA EXTFORCE1 Range) ¹		30	40	μs	3.7 V step, R _{DUT} = 2.4 Ω, C _{DUT} = 0.22 μF, full dc load.
MI (900 mA EXTFORCE1 Range) ¹		32	42	μs	8 V step, R _{DUT} = 8.8 Ω, C _{DUT} = 0.22 μF, full dc load.
MI (500 mA EXTFORCE2 Range) ¹		69	95	μs	15 V step, R _{DUT} = 30 Ω, C _{DUT} = 0.22 μF, full dc load.
MI (300 mA EXTFORCE2 Range) ¹		70	100	μs	10 V step, R _{DUT} = 33.3 Ω, C _{DUT} = 0.22 μF, full dc load.
MI (25 mA Range) ^{1,2}		650		μs	20 V step, R _{DUT} = 800 Ω, C _{DUT} = 0.22 μF, full dc load.
MI (2.5 mA Range) ^{1,2}		6400		μs	10 V step, R _{DUT} = 4 kΩ, C _{DUT} = 0.22 μF, full dc load.
MI Buffer Alone ¹		10	15	μs	0.5 V step using MEASOUT high-Z to within 10 mV of final value.
SETTLING TIME (FV, MEASURE VOLTAGE)		Compensation Register 1 = 0x4880 (229 nF to 380 nF, ESR 74 to 140 mΩ)			To within 10 mV of programmed value.
MV (1200 mA Range) ¹		16		μs	3.7 V step, R _{DUT} = 2.4 Ω, C _{DUT} = 0.22 μF, full dc load.
MV (900 mA Range) ¹		20		μs	8 V step, R _{DUT} = 8.8 Ω, C _{DUT} = 0.22 μF, full dc load.
MV (500 mA Range) ¹		34		μs	15 V step, R _{DUT} = 30 Ω, C _{DUT} = 0.22 μF, full dc load.
MV (300 mA Range) ¹		25		μs	10 V step, R _{DUT} = 33.3 Ω, C _{DUT} = 0.22 μF, full dc load.
MV (25 mA Range) ^{1,2}		125	180	μs	20 V step, R _{DUT} = 800 Ω, C _{DUT} = 0.22 μF, full dc load.
MV (2.5 mA Range) ^{1,2}		300	500	μs	10 V step, R _{DUT} = 4 kΩ, C _{DUT} = 0.22 μF, full dc load.
MV (250 μA Range) ^{1,2}		300	500	μs	10 V step, R _{DUT} = 40 kΩ, C _{DUT} = 0.22 μF, full dc load.
MV Buffer Alone ¹		2	5	μs	10 V step using MEASOUT high-Z to within 10 mV of final value.
SETTLING TIME (FV) SAFE MODE					To within 100 mV of programmed value.
FV (1200 mA EXTFORCE1 Range) ¹		25		μs	3.7 V step, R _{DUT} = 3.1 Ω, C _{DUT} = 0.22 μF, full dc load.
FV (180 mA EXTFORCE1 Range) ¹		303		μs	3 V step, R _{DUT} = 16 Ω, C _{DUT} = 0.22 μF to 20 μF, full dc load.
FV (100 mA EXTFORCE2 Range) ¹		660		μs	8 V step, R _{DUT} = 33.3 Ω, C _{DUT} = 0.22 μF to 20 μF, full dc load.
FV (25 mA Range) ^{1,2}		760	1000	μs	20 V step, R _{DUT} = 400 Ω, C _{DUT} = 0.22 μF, full dc load.
SWITCHING TRANSIENTS					
Range Change Transient ¹			0.5	% of FV	C _{DUT} = 10 μF, changing from higher to adjacent lower ranges (except EXTFORCE1 to EXTFORCE2).
	20			mV	C _{DUT} = 10 μF, changing from lower (5 μA) to higher range (EXTFORCE1).
			0.5	% of FV	C _{DUT} = 100 μF, changing between all ranges.
DAC SPECIFICATIONS					
Force/Comparator/Offset DACs					
Resolution		16		Bits	
Voltage Output Span	−22		+25	V	V _{REF} = 5 V, minimum and maximum values set by offset DAC.
Differential Nonlinearity ¹	−1		+1	LSB	Guaranteed monotonic.
Offset DAC					
Gain Error	−20		+20	mV	
Clamp DAC					
Resolution		16		Bits	CLL < CLH.
Voltage Output Span	−22		+25	V	V _{REF} = 5 V, minimum and maximum values set by offset DAC.
Differential Nonlinearity ¹	−1		+1	LSB	Guaranteed monotonic.

AD5560

Parameter	Min	Typ	Max	Unit	Test Conditions/Comments
OSD DAC					
Resolution		16		Bits	
Voltage Output Span	0.62		5	V	$V_{REF} = 5\text{ V}$.
Differential Nonlinearity ¹	1		1	LSB	Guaranteed monotonic.
DGS DAC					
Resolution		16		Bits	
Voltage Output Span	0		5	V	$V_{REF} = 5\text{ V}$.
Differential Nonlinearity ¹	−1		+1	LSB	Guaranteed monotonic.
Comparator DAC Dynamic					
Output Voltage Settling Time ¹		3.5	6	μs	1 V change to 1LSB.
Slew Rate ¹		1		V/μs	
Digital-to-Analog Glitch Energy ¹		10		nV-s	
Glitch Impulse Peak Amplitude ¹		40		mV	
REFERENCE INPUT					
VREF DC Input Impedance	1			MΩ	Typically 100 MΩ.
VREF Input Current	−10		+10	μA	Per input; typically ±30 nA.
VREF Range ¹	2		5	V	
COMPARATOR					
Error	−7		+7	mV	Measured directly at comparator, does not include measure block errors. Uncalibrated.
VOLTAGE COMPARATOR					
Propagation Delay ¹		0.25		μs	With respect to the measured voltage.
Error ¹	−12		+12	mV	Uncalibrated.
CURRENT COMPARATOR					
Propagation Delay ¹		0.25	1	μs	
Error ¹	−1.5		+1.5	%	Of programmed current range, uncalibrated.
MEASURE OUTPUT, MEASOUT					
Measure Output Voltage Span ¹	−12.81		+12.81	V	MEASOUT gain = 1, $V_{REF} = 5\text{ V}$, offset DAC = 0x8000.
Measure Output Voltage Span ¹	−6.405		+6.405	V	MEASOUT gain = 1, $V_{REF} = 2.5\text{ V}$.
Measure Output Voltage Span ¹	0		5.125	V	MEASOUT gain = 0.2, $V_{REF} = 5\text{ V}$, offset DAC = 0x8000.
Measure Output Voltage Span ¹	0		2.56	V	MEASOUT gain = 0.2, $V_{REF} = 2.5\text{ V}$.
Measure Pin Output Impedance			115	Ω	
Output Leakage Current	−100		+100	nA	When $\overline{HW_INH}$ is low.
Output Capacitance ¹		5		pF	
Short Circuit Current ¹	−10		+10	mA	
OPEN-SENSE DETECT/CLAMP/ALARM					
Measurement Accuracy	−200		+200	mV	
Clamp Accuracy		600	900	mV	
Alarm Delay ¹		50		μs	
DUTGND					
Voltage Range ¹	−1		+1	V	
Pull-Up Current		+50	+70	μA	Pull-up for purpose of detecting open circuit on DUTGND, can be disabled.
Leakage Current	−1		+1	μA	When pull-up disabled, DGS DAC = 0x3333 (1 V with $V_{REF} = 5\text{ V}$). If DUTGND voltage is far away from one of comparator thresholds, more leakage may be present.
Trip Point Accuracy	−30		+10	mV	
Alarm Delay ¹		50		μs	
GUARD AMPLIFIER					
Voltage Range ¹	AVSS + 2.25		AVDD − 2.25	V	
Voltage Span ¹			25	V	
Output Offset	−10		+10	mV	
Short Circuit Current ¹	−20		+20	mA	
Load Capacitance ¹			100	nF	
Output Impedance		100		Ω	
Alarm Delay ¹		200		μs	If it moves 100 mV away from input level.

Parameter	Min	Typ	Max	Unit	Test Conditions/Comments
DIE TEMPERATURE SENSOR					
Accuracy ¹	–10		+10	%	Relative to a temperature change.
Output Voltage at 25°C		1.54		V	
Output Scale Factor ¹		4.7		mV/°C	
Output Voltage Range ¹	1		2	V	
SPI INTERFACE LOGIC					
Logic Inputs					
Input High Voltage, V_{IH}	1.7/2.0			V	(2.3 V to 2.7 V)/(2.7 V to 5.5 V) JEDEC-compliant input levels.
Input Low Voltage, V_{IL}			0.7/0.8	V	(2.3 V to 2.7 V)/(2.7 V to 5.5 V) JEDEC-compliant input levels.
Input Current, I_{INH} , I_{INL}	–1		+1	μA	
Input Capacitance, C_{IN} ¹			10	pF	
CMOS Logic Outputs					SDO, CPOL, CPOH, GPO, CPO.
Output High Voltage, V_{OH}	DVCC – 0.4			V	
Output Low Voltage, V_{OL}			0.4	V	$I_{OL} = 500 \mu A$.
Tristate Leakage Current	–1		+1	μA	SDO, CPOL, CPOH, CPO.
Output Capacitance ¹	10	10	10	pF	SDO, CPOL, CPOH, CPO.
Open-Drain Logic Outputs					BUSY, TMPALM, CLALM, KELALM.
Output Low Voltage, V_{OL}			0.4	V	$I_{OL} = 500 \mu A$, $C_L = 50 \text{ pF}$, $R_{PULLUP} = 1 \text{ k}\Omega$.
Output Capacitance ¹			10	pF	
POWER SUPPLIES					
HCAV _{DD} 1x	4		28	V	$ HCAV_{DDX} - HCAV_{SSX} < 33 \text{ V}$, $HCAV_{SSX} \geq AV_{SS}$, $HCAV_{DDX} \leq AV_{DD}$.
HCAV _{SS} 1x	–25		–5	V	
HCAV _{DD} 2x	4		28	V	$ HCAV_{DDX} - HCAV_{SSX} < 33 \text{ V}$, $HCAV_{SSX} \geq AV_{SS}$, $HCAV_{DDX} \leq AV_{DD}$.
HCAV _{SS} 2x	–25		–5	V	
AV _{DD}	8		28	V	$ AV_{DD} - AV_{SS} < 33 \text{ V}$.
AV _{SS}	–25		–5	V	
DV _{CC}	2.3		5.5	V	
AI _{DD} ³			30	mA	All ranges.
AI _{SS} ³	–30			mA	All ranges.
DI _{CC}			3	mA	
AI _{DD} ³			27	mA	Channel inhibited/tristate, $\overline{HW_INH}$ or $\overline{SW_INH}$ low.
AI _{SS} ³	–27			mA	Channel inhibited/tristate, $\overline{HW_INH}$ or $\overline{SW_INH}$ low.
					HCAV _{DD} and HCAV _{SS} supply currents shown are excluding load currents; however, for power budget calculations, the supply currents here are consumed by the load.
HCAI _{DD} 1			20	mA	When enabled, excluding load conditions.
HCAI _{DD} 1			0.5	mA	When disabled.
HCAI _{SS} 1	–20			mA	When enabled, excluding load condition.
HCAI _{SS} 1	–0.5			mA	When disabled.
HCAI _{DD} 2			15	mA	When enabled, excluding load conditions.
HCAI _{DD} 2			0.25	mA	When disabled.
HCAI _{SS} 2	–15			mA	When enabled, excluding load conditions.
HCAI _{SS} 2	–0.25			mA	When disabled.
POWER-DOWN CURRENTS					Supply currents on power-up or during a power-down condition.
HCAIDD			250	μA	
HCAISS	–250			μA	
HCAIDD			250	μA	
HCAISS	–250			μA	
AIDD			5	mA	
AISS	–5			mA	
DICC			3	mA	

AD5560

Parameter	Min	Typ	Max	Unit	Test Conditions/Comments
Maximum Power Dissipation					
EXTFORCE1			10	W	
EXTFORCE2			5	W	
Power-Up Overshoot ¹			5	%	Of programmed value.
Power Supply Sensitivity ¹					DC to 1 kHz.
Δ Forced Voltage/ Δ AV _{DD}		–65		dB	–30 dB at 100 kHz.
Δ Forced Voltage/ Δ AV _{SS}		–65		dB	–25 dB at 100 kHz.
Δ Forced Voltage/ Δ HCAV _{DD}		–90		dB	–60 dB at 100 kHz.
Δ Forced Voltage/ Δ HCAV _{SS}		–90		dB	–62 dB at 100 kHz.
Δ Measured Current/ Δ AV _{DD}		–50		dB	–25 dB at 100 kHz.
Δ Measured Current/ Δ AV _{SS}		–43		dB	–20 dB at 100 kHz.
Δ Measured Current/ Δ HCAV _{DD}		–90		dB	–60 dB at 100 kHz.
Δ Measured Current/ Δ HCAV _{SS}		–90		dB	–60 dB at 100 kHz.
Δ Measured Voltage/ Δ AV _{DD}		–65		dB	–30 dB at 100 kHz.
Δ Measured Voltage/ Δ AV _{SS}		–65		dB	–25 dB at 100 kHz.
Δ Measured Voltage/ Δ HCAV _{DD}		–90		dB	–60 dB at 100 kHz.
Δ Measured Voltage/ Δ HCAV _{SS}		–90		dB	–65 dB at 100 kHz.
Δ Forced Voltage/ Δ DV _{CC}		–80		dB	–46 dB at 100 kHz.
Δ Measured Current/ Δ DV _{CC}		–80		dB	–36 dB at 100 kHz.
Δ Measured Voltage/ Δ DV _{CC}		–80		dB	–46 dB at 100 kHz.

¹ Guaranteed by design and characterization, not subject to production test.

² Clamps disabled.

³ Not including internal pull-up current between AV_{DD}/AV_{SS} and HCAV_{DD}/HCAV_{SS} pins.

TIMING CHARACTERISTICS

$HCAV_{DD} \leq AV_{SS} + 33\text{ V}$, $HCAV_{SS} \geq AV_{SS}$, $AV_{DD} \geq 8\text{ V}$, $AV_{SS} \leq -5\text{ V}$, $|AV_{DD} - AV_{SS}| \geq 16\text{ V}$ and $\leq 33\text{ V}$, $V_{REF} = 5\text{ V}$ ($T_J = 25^\circ\text{C}$ to 90°C , maximum specifications, unless otherwise noted).

Table 2. SPI Interface

Parameter ^{1, 2, 3}	DV _{CC} = 2.3 V to 2.7 V	DV _{CC} = 2.7 V to 3.3 V	DV _{CC} = 4.5 V to 5.5 V	Unit	Description
t _{UPDATE}	600	600	600	ns max	Channel update cycle time
t ₁	25	20	20	ns min	SCLK cycle time; 60/40 duty cycle
t ₂	10	8	8	ns min	SCLK high time
t ₃	10	8	8	ns min	SCLK low time
t ₄	10	10	10	ns min	$\overline{\text{SYNC}}$ falling edge to SCLK falling edge setup time
t ₅	15	15	15	ns min	Minimum $\overline{\text{SYNC}}$ high time
t ₆	5	5	5	ns min	24 th SCLK falling edge to $\overline{\text{SYNC}}$ rising edge
t ₇	5	5	5	ns min	Data setup time
t ₈	4.5	4.5	4.5	ns min	Data hold time
t ₉ ⁴	40	35	30	ns max	$\overline{\text{SYNC}}$ rising edge to $\overline{\text{BUSY}}$ falling edge
t ₁₀	1.5	1.5	1.5	μs max	$\overline{\text{BUSY}}$ pulse width low for DAC X1 write
	280	280	280	ns max	$\overline{\text{BUSY}}$ pulse width low for other register write
t ₁₁	25	20	10	ns min	$\overline{\text{RESET}}$ pulse width low
t ₁₂	400	400	400	μs max	$\overline{\text{RESET}}$ time indicated by $\overline{\text{BUSY}}$ low
t ₁₃	250	250	250	ns min	Minimum $\overline{\text{SYNC}}$ high time in readback mode
t ₁₄ ^{5, 6}	45	35	25	ns max	SCLK rising edge to SDO valid
t ₁₅	30	30	30	ns max	$\overline{\text{SYNC}}$ rising edge to SDO high-Z
LOAD Timing					
t ₁₆	20	20	20	ns min	$\overline{\text{LOAD}}$ pulse width low
t ₁₇	150	150	150	ns min	$\overline{\text{BUSY}}$ rising edge to force output response time
t ₁₈	0	0	0	ns min	$\overline{\text{BUSY}}$ rising edge to $\overline{\text{LOAD}}$ falling edge
t ₁₉	150	150	150	ns min	$\overline{\text{LOAD}}$ rising edge to FORCE output response time
	150	150	150	ns min	$\overline{\text{LOAD}}$ rising edge to current range response

¹ Guaranteed by design and characterization, not production tested.

² All input signals are specified with t_R = t_F = 2 ns (10% to 90% of V_{CC}) and timed from a voltage level of 1.2 V.

³ See Figure 4 and Figure 5.

⁴ This is measured with the load circuit shown in Figure 2.

⁵ This is measured with the load circuit shown in Figure 3.

⁶ Longer SCLK cycle time is required for correct operation of readback mode, consult timing diagrams and timing specifications.

TIMING DIAGRAMS

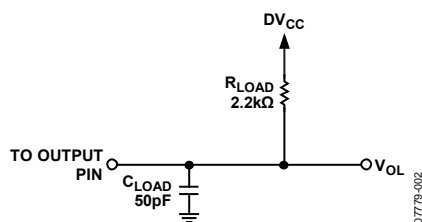


Figure 2. Load Circuit for Open Drain


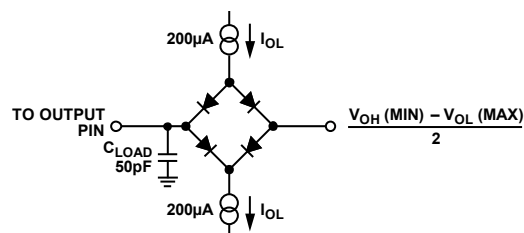


Figure 3. Load Circuit for CMOS

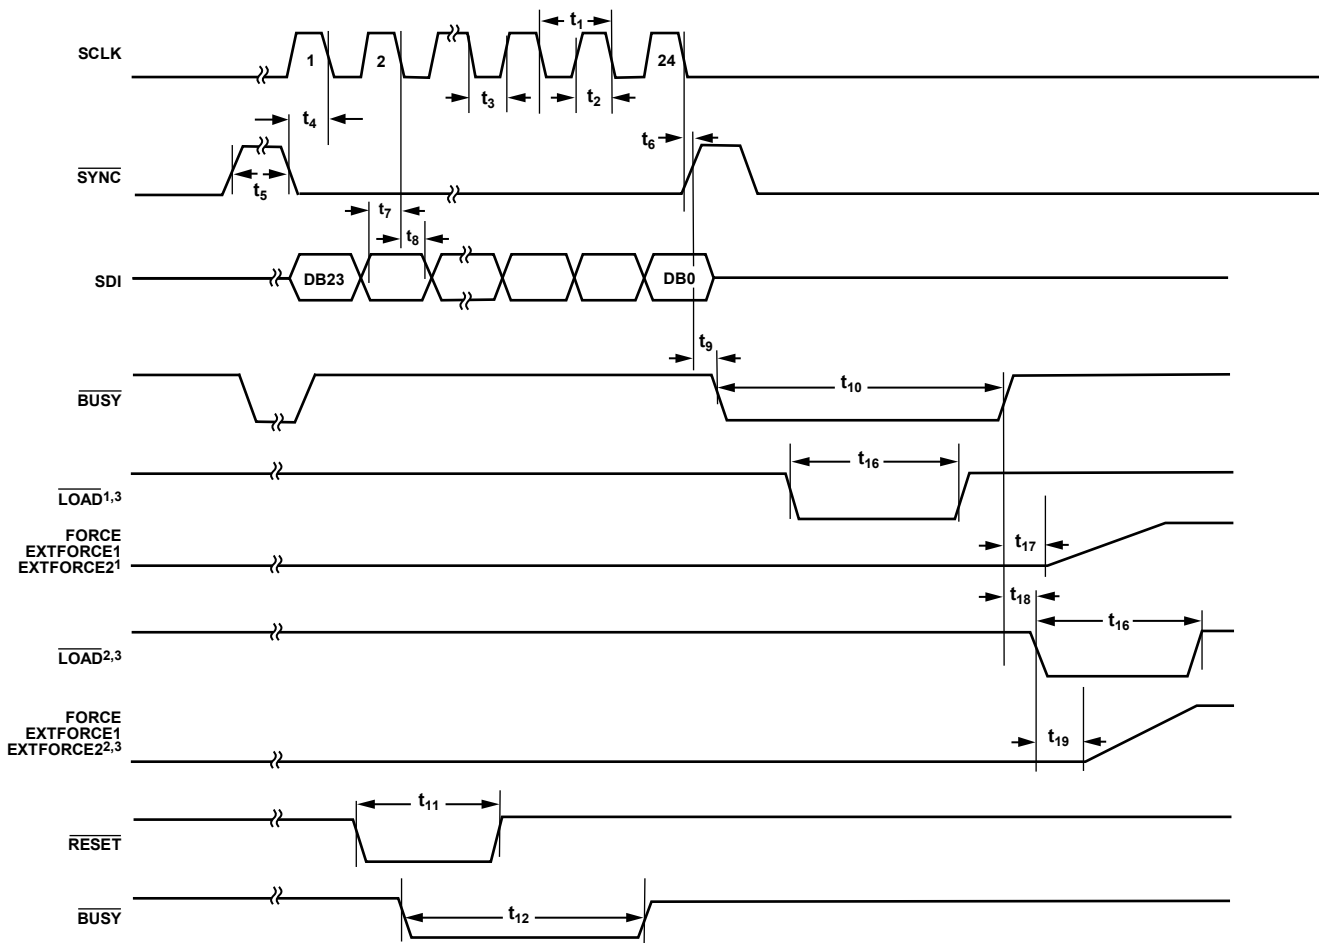

¹LOAD ACTIVE DURING BUSY.

²LOAD ACTIVE AFTER BUSY.

³LOAD FUNCTION IS AVAILABLE VIA CLEN OR HW_INH AS DETERMINED BY DPS REGISTER 2.

Figure 4. SPI Write Timing

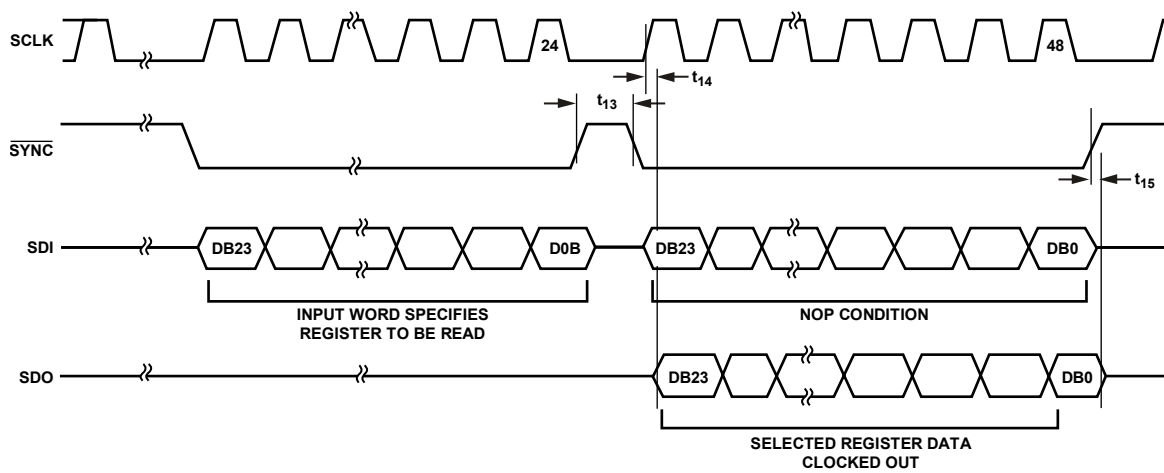


Figure 5. SPI Read Timing

ABSOLUTE MAXIMUM RATINGS

Table 3.

Parameter	Rating
AV_{DD} to AV_{SS}	34 V
AV_{DD} to AGND	−0.3 V to +34 V
AV_{SS} to AGND	−34 V to +0.3 V
$HCAV_{DDX}$ to $HCAV_{SS}$	34 V
$HCAV_{DDX}$ to AGND	−0.3 V to +34 V
$HCAV_{SSX}$ to AGND	−34 V to +0.3 V
$HCAV_{DDX}$ to AV_{SS}	−0.3 V to $AV_{SS} + 34$ V
$HCAV_{DDX}$ to AV_{DD}	−0.3 V to $AV_{DD} + 0.3$ V
$HCAV_{SSX}$ to AV_{SS}	+0.3 V to $AV_{SS} - 0.3$ V
DV_{CC} to DGND	−0.3 V to +7 V
AGND to DGND	−0.3 V to +0.3 V
REFGND to AGND	−0.3 V to +0.3 V
Digital Inputs to DGND	−0.3 V to $DV_{CC} + 0.3$ V
Analog Inputs to AGND	$AV_{SS} - 0.3$ V to $AV_{DD} + 0.3$ V
EXTFORCE1 and EXTFORCE2 to AGND ¹	$AV_{DD} - 28$ V
Storage Temperature	−65°C to +125°C
Operating Junction Temperature	25°C to 90°C
Reflow Profile	J-STD 20 (JEDEC)
Junction Temperature	150°C max
Power Dissipation	10 W max (EXTFORCE1 stage) 5 W max (EXTFORCE2 stage)
ESD	
HBM	1500 V
FICDM	500 V

¹ When an EXTFORCE1 or EXTFORCE2 stage is enabled and the supply differential $|AV_{DD} - AV_{SS}| > 28$ V, care should be taken to ensure that these pins are not directly shorted to AV_{SS} voltage at any time because this can cause damage to device.

Stresses above those listed under Absolute Maximum Ratings may cause permanent damage to the device. This is a stress rating only; functional operation of the device at these or any other conditions above those indicated in the operational section of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

THERMAL RESISTANCE

Table 4.¹

Cooling	Airflow (LFPM)	θ_{JA}	θ_{JC} (Uniform Heating)	θ_{JC} (Local Heating)	Unit
No Heat Sink ²	0	42	1	4.91	°C/W
	200	37.2			°C/W
	400	35.7			°C/W
Heat Sink ³	0	12.2	1	4.91	°C/W
	200	11.1			°C/W
	400	9.5			°C/W
Cold Plate ⁴	N/A	N/A	1	4.91	°C/W

¹ $T_A = 30^\circ\text{C}$, $T_{\text{COLD PLATE}} = 30^\circ\text{C}$, total power = 8.5 W (1 W distributed, 7.5 W in power stages – local heating), 0.5 mm TIM, 2.56 W/m/k.

² No heat sink attached, thermal performance of the package depends on environmental conditions. All numbers are simulated and assume a JEDEC 4-layer test board.

³ Heat sink attached with a rated performance of $\theta_{CA} \sim 6.2^\circ\text{C/W}$ giving $T_J = 111^\circ\text{C}$ at 400 LFM. Thermal performance of the package depends on the heat sink and environmental conditions. All numbers are simulated and assume a JEDEC 4-layer test board.

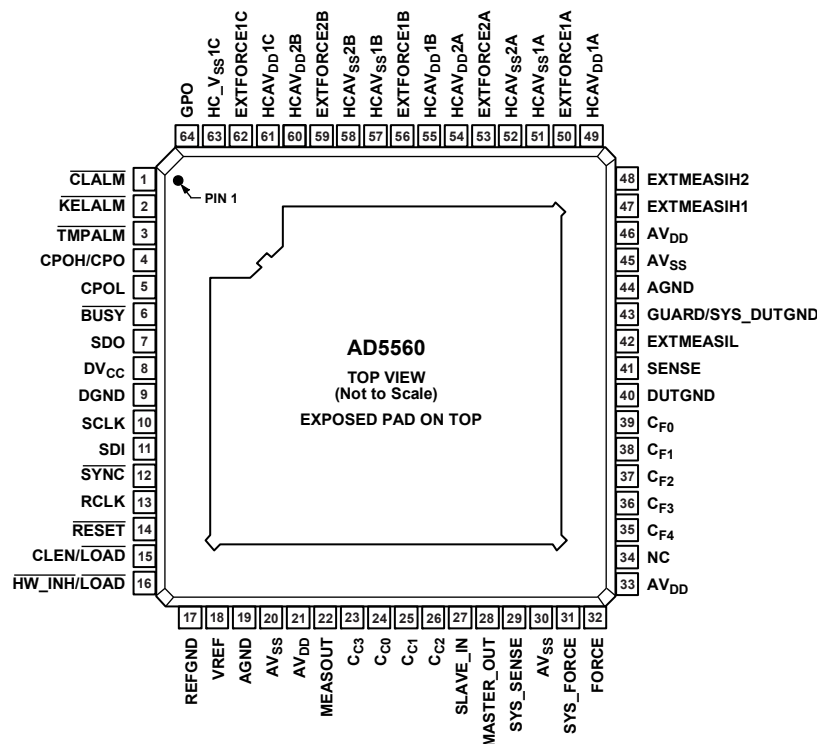
⁴ Attached infinite cold plate should be $\leq 30^\circ\text{C}$ to maintain $T_J < 90^\circ\text{C}$. Thermal performance of the package depends on the heat sink and environmental conditions. All numbers are simulated and assume a JEDEC 4-layer test board.

ESD CAUTION



ESD (electrostatic discharge) sensitive device. Charged devices and circuit boards can discharge without detection. Although this product features patented or proprietary protection circuitry, damage may occur on devices subjected to high energy ESD. Therefore, proper ESD precautions should be taken to avoid performance degradation or loss of functionality.

PIN CONFIGURATION AND FUNCTION DESCRIPTIONS



NOTES

1. NC = NO CONNECT.
2. EXPOSED PAD ON TOP OF PACKAGE. EXPOSED PAD IS INTERNALLY CONNECTED TO MOST NEGATIVE POINT, AV_{SS} .

07779-006

Figure 6. Pin Configuration

Table 5. Pin Function Descriptions

Pin No.	Name	Description
1	CLALM	Clamp Alarm Output. Open-drain output, active low; this pin can be programmed to be either latched or unlatched.
2	KELALM	Kelvin Alarm Pin for SENSE and DUTGND, Open-Drain Active Low. This pin can be programmed to be either latched or unlatched.
3	TMPALM	Temperature Alarm Flag. Open-drain output, active low; this pin can be programmed to be either latched or unlatched.
4	CPOH/CPO	Comparator High Output (CPOH) or Window Comparator Output (CPO).
5	CPOL	Comparator Low Output.
6	BUSY	Open-Drain Active Low Output. This pin indicates the status of the calibration engine for the DAC channels.
7	SDO	Serial Data Output. This pin is used for reading back DAC and DPS register information for diagnostic purposes.
8	DV _{CC}	Digital Supply Voltage.
9	DGND	Digital Ground Reference Point.
10	SCLK	Clock Input, Active Falling Edge.
11	SDI	Serial Data Input.
12	SYNC	Frame Sync, Active Low.
13	RCLK	Ramp Clock Logic Input. If the ramp function is used, a clock signal of 833 kHz maximum should be applied to this input to drive the ramp circuitry. Tie RCLK low if unused.
14	RESET	Logic Input. This pin is used to reset all internal nodes on the device to their power-on reset value.
15	CLEN/LOAD	Clamp Enable. This input allows the user to enable or disable the clamp circuitry. This pin can be configured as a LOAD function to allow synchronization of multiple devices. Either CLEN or HW_INH can be chosen as LOAD input (see the system control register, Address 0x1).
16	HW_INH/LOAD	Hardware Inhibit Input to Disable Force Amplifier. This pin can be configured as a LOAD function to allow synchronization of multiple devices. Either CLEN or HW_INH can be chosen as a LOAD input (see the system control register, Address 0x1).
17	REFGND	Accurate Ground Reference for Applied Voltage Reference.

Pin No.	Name	Description
18	VREF	Reference Input for DAC Channels, Input Range 2 V to 5 V.
19, 44	AGND	Analog Ground.
20, 30, 45	AV _{SS}	Negative Analog Supply Voltage. These pins supply DACs and other high voltage circuitry, such as measure blocks.
21, 33, 46	AV _{DD}	Positive Analog Supply Voltage. These pins supply DACs and other high voltage circuitry, such as measure blocks.
22	MEASOUT	Multiplexed DUT voltage sense, DUT current sense, Kelvin sense or temperature output; refer to AGND.
23	C _{C3}	Compensation Capacitor Input 3.
24	C _{C0}	Compensation Capacitor Input 0.
25	C _{C1}	Compensation Capacitor Input 1.
26	C _{C2}	Compensation Capacitor Input 2.
27	SLAVE_IN	Slave Input When Ganging Multiple DPS Devices.
28	MASTER_OUT	Master Output When Ganging Multiple DPS Devices.
29	SYS_SENSE	External Sense Signal Output.
31	SYS_FORCE	External Force Signal Input.
32	FORCE	Output Force Pin for Internal Current Ranges.
34	NC	No Connect.
35	C _{F4}	Feedforward Capacitor 4.
36	C _{F3}	Feedforward Capacitor 3.
37	C _{F2}	Feedforward Capacitor 2.
38	C _{F1}	Feedforward Capacitor 1.
39	C _{F0}	Feedforward Capacitor 0.
40	DUTGND	Device Under Test Ground.
41	SENSE	Input Sense Line.
42	EXTMEASIL	Low Side Measure Current Line for External High Current Ranges.
43	GUARD/SYS_DUTGND	Guard Amplifier Output Pin or System Device Under Test Ground pin. See the DPS Register 2 in Table 19 for addressing details.
47	EXTMEASIH1	Input High Measure Line for External High Current Range 1.
48	EXTMEASIH2	Input High Measure Line for External High Current Range 2.
49, 55, 61	HCAV _{DD1A} , HCAV _{DD1B} , HCAV _{DD1C}	High Current Positive Analog Supply Voltage, for EXTFORCE1 Range.
50, 56, 62	EXTFORCE1A, EXTFORCE1B, EXTFORCE1C	Output Force. This pin is used for high Current Range 1, up to a maximum of ± 1.2 A.
51, 57, 63	HCAV _{SS1A} , HCAV _{SS1B} , HCAV _{SS1C}	High Current Negative Analog Supply Voltage, for EXTFORCE1 Range.
52, 58	HCAV _{SS2A} , HCAV _{SS2B}	High Current Negative Analog Supply Voltage, for EXTFORCE2 Range.
53, 59	EXTFORCE2A, EXTFORCE2B	Output Force. This pin is used for high Current Range 2, up to a maximum of ± 500 mA.
54, 60	HCAV _{DD2A} , HCAV _{DD2B}	High Current Positive Analog Supply Voltage, for EXTFORCE2 Range.
64	GPO	Extra Logic Output Bit. Ideal for external functions such as switching out a decoupling capacitor at DUT.
65	EP	The exposed pad is internally connected to AV _{SS} .

TYPICAL PERFORMANCE CHARACTERISTICS

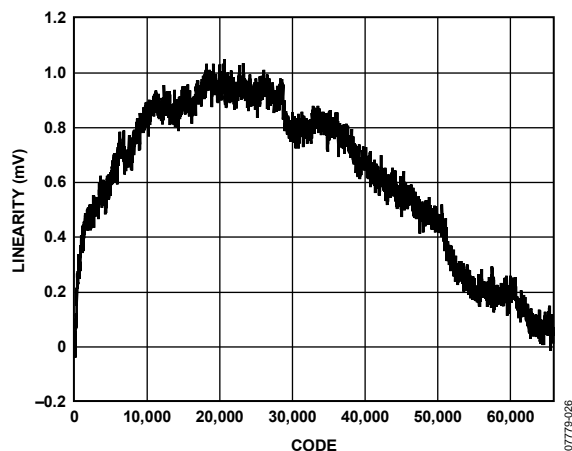


Figure 7. Force Voltage Linearity vs. Code, VREF = 5 V, No Load

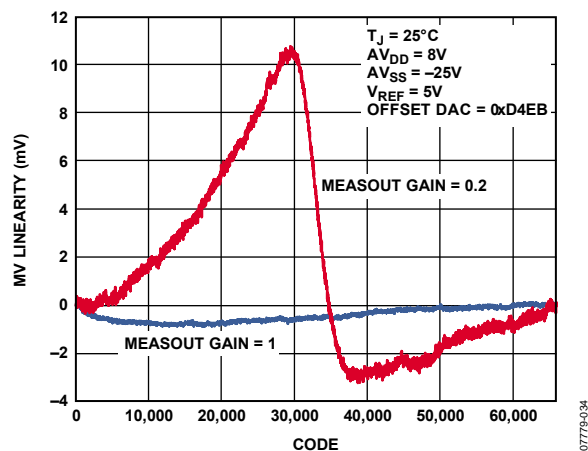


Figure 10. Measure Voltage Linearity vs. Code (MEASOUT Gain 1, MEASOUT Gain = 0.2, Negative Skew Supply)

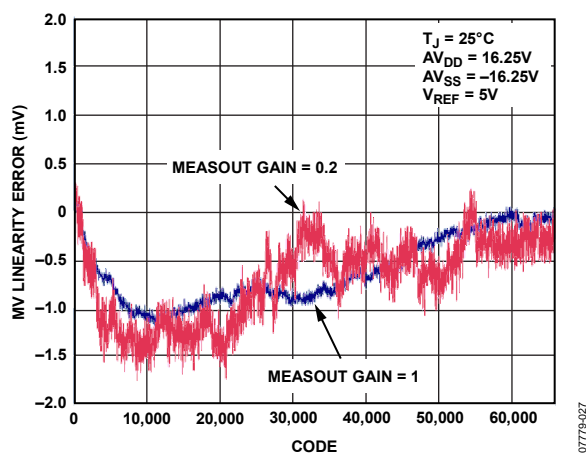


Figure 8. Measure Voltage Linearity vs. Code (MEASOUT Gain = 1, MEASOUT Gain = 0.2, Nominal Supplies)

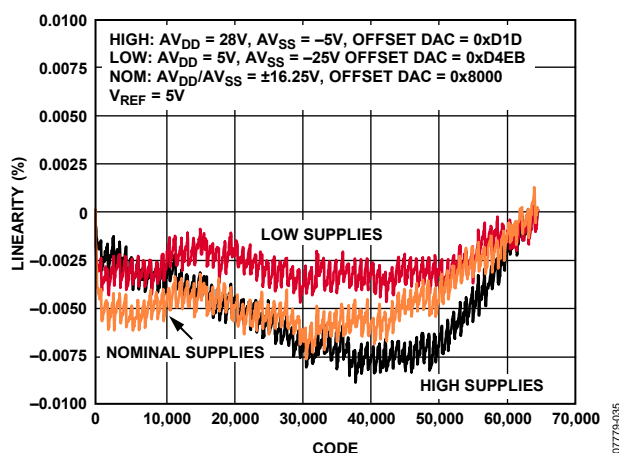


Figure 11. Measure Current Linearity vs. Code (MEASOUT Gain = 1, MI Gain = 20, TJ = 25°C)

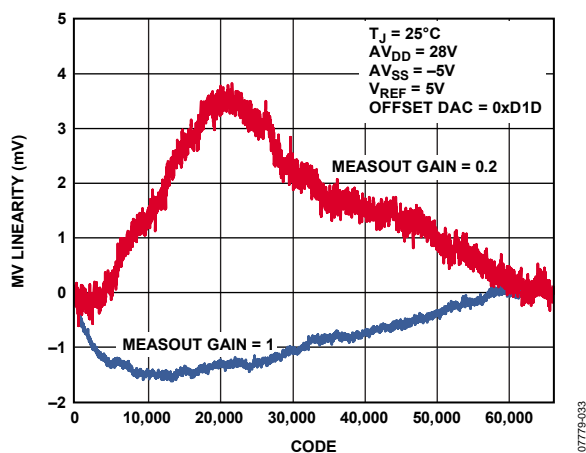


Figure 9. Measure Voltage Linearity vs. Code (MEASOUT Gain = 1, MEASOUT Gain = 0.2, Positive Skew Supply)

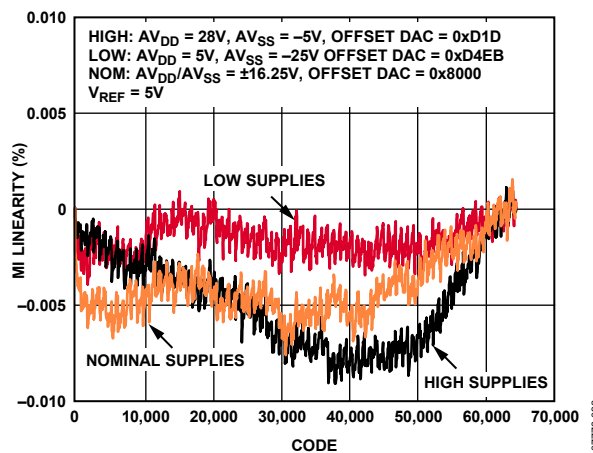


Figure 12. Measure Current Linearity vs. Code (MEASOUT Gain = 1, MI Gain = 10)

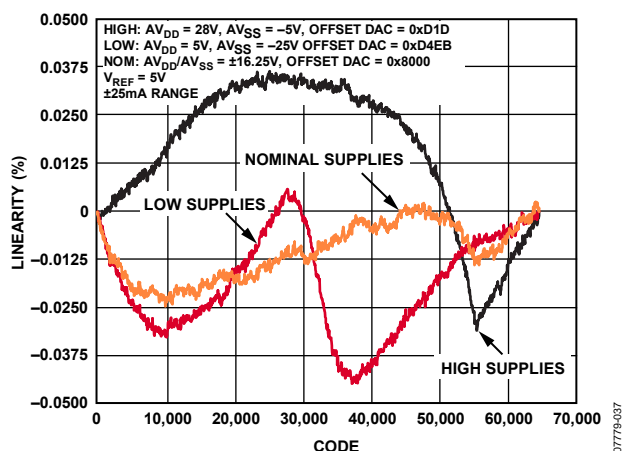


Figure 13. Measure Current Linearity vs. Code (MEASOUT Gain = 0.2, MI Gain = 20)

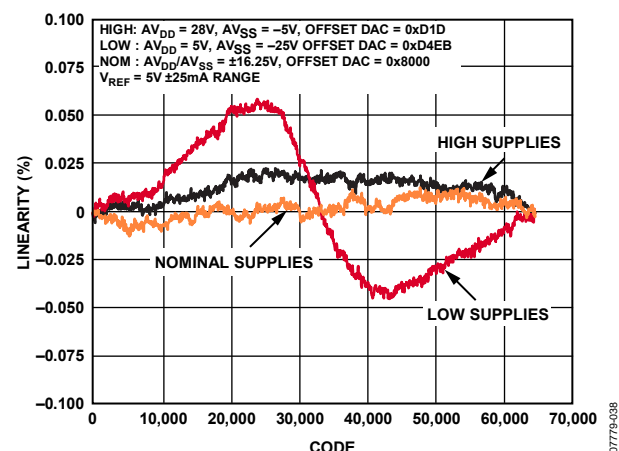


Figure 14. Measure Current Linearity vs. Code (MEASOUT Gain = 0.2, MI Gain = 10)

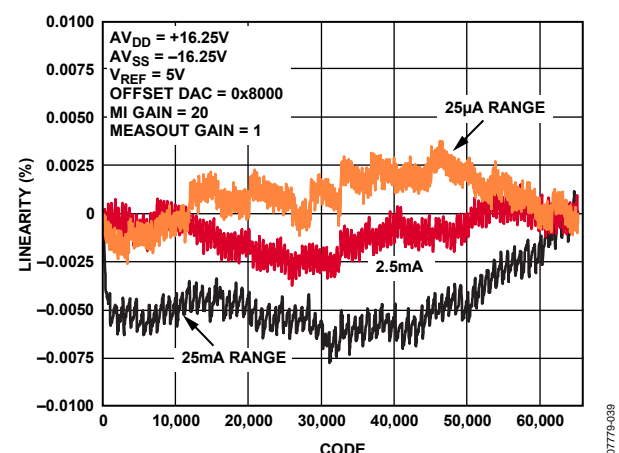


Figure 15. Measure Current Linearity vs. I_{RANGE} (MEASOUT Gain = 1, MI Gain = 20)

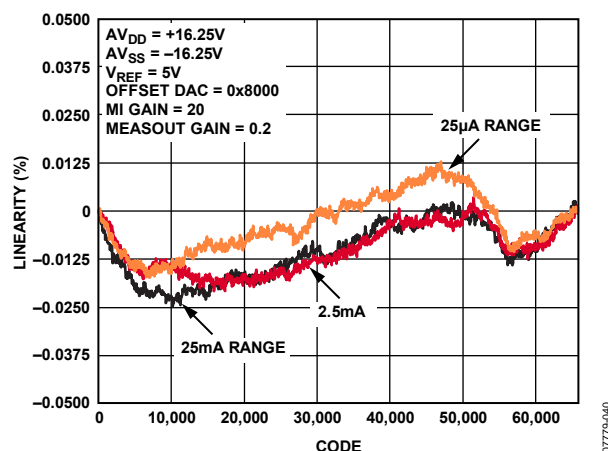


Figure 16. Measure Current Linearity vs. I_{RANGE} (MEASOUT Gain = 0.2, MI Gain = 20)

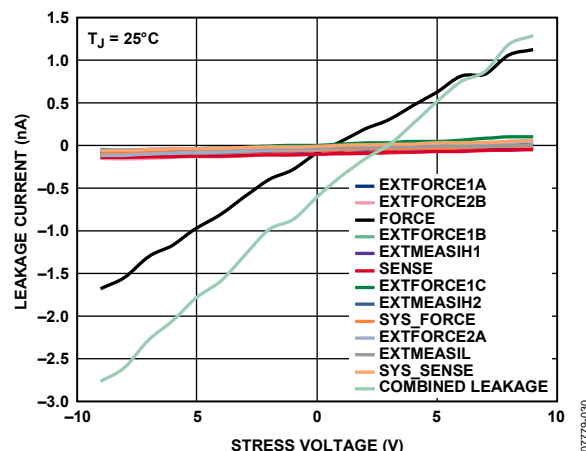


Figure 17. Leakage Current vs. Stress Voltage (Force and Combined Leakage)

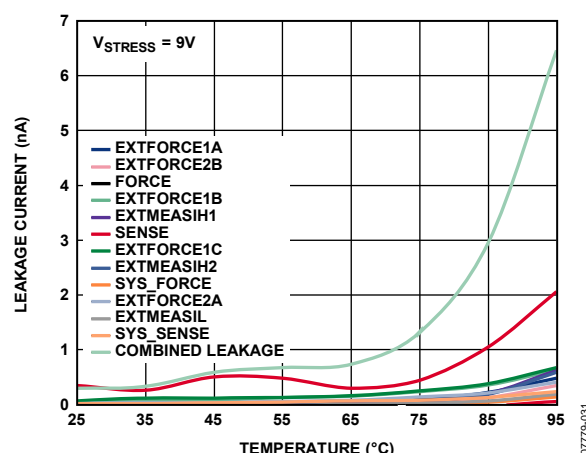


Figure 18. Leakage Current vs. Temperature (Force and Combined Leakage), $V_{\text{STRESS}} = 9V$

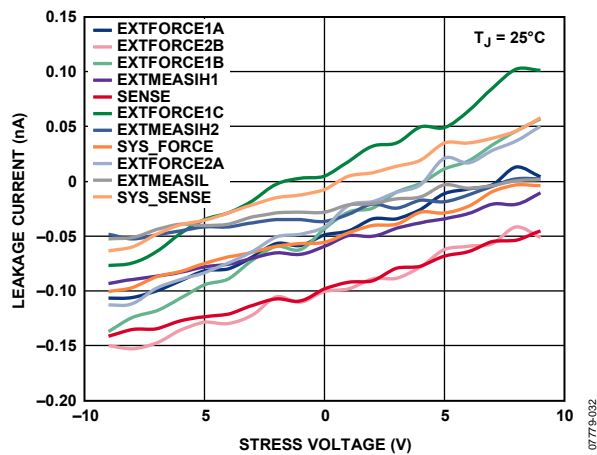


Figure 19. Leakage Current vs. Stress Voltage

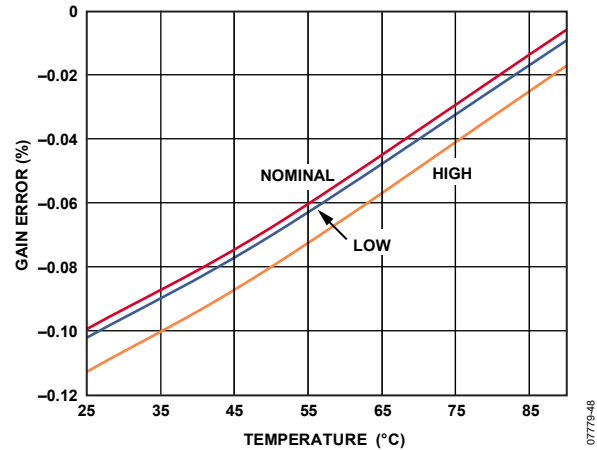


Figure 22. MI Positive Gain Error vs. Temperature, MI Gain = 20, MEASOUT Gain = 1

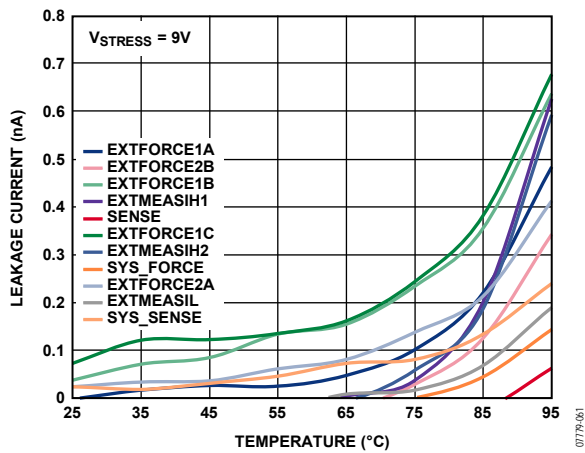


Figure 20. Leakage Current vs. Temperature, $V_{STRESS} = 9V$

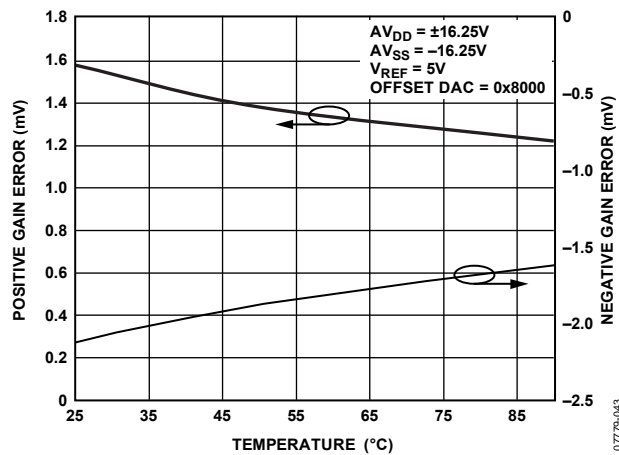


Figure 23. FV Gain Error vs. Temperature

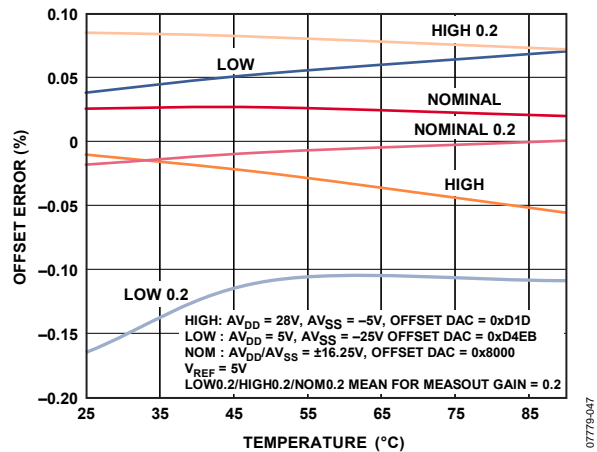


Figure 21. MI Offset Error vs. Temperature, MI Gain = 20, MEASOUT Gain = 1 and 0.2

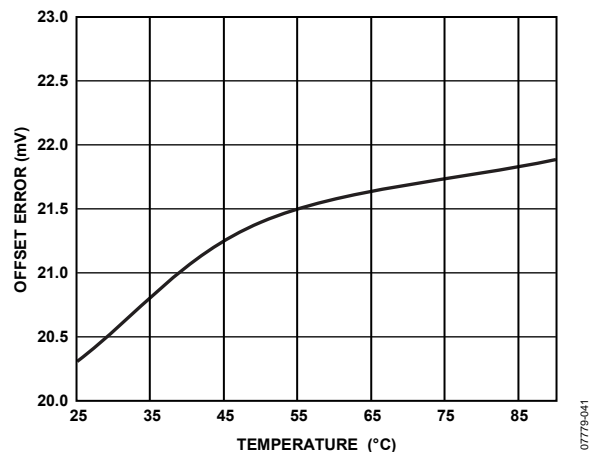


Figure 24. FV Offset Error vs. Temperature

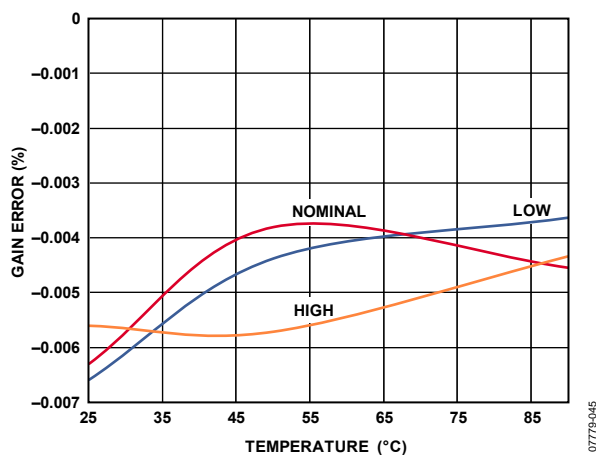


Figure 25. MV Gain Error vs. Temperature, MEASOUT Gain = 1

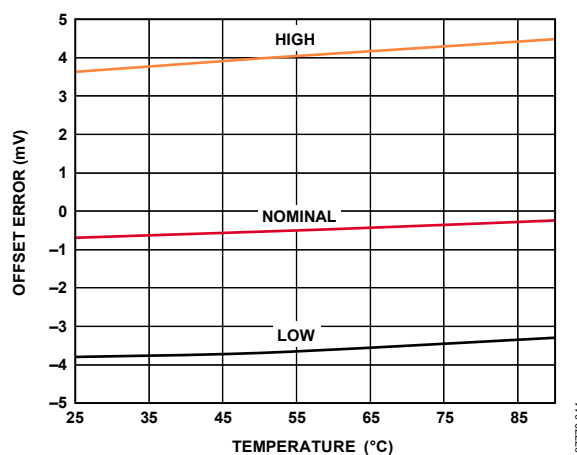


Figure 28. MV Offset Error vs. Temperature, MEASOUT Gain = 0.2

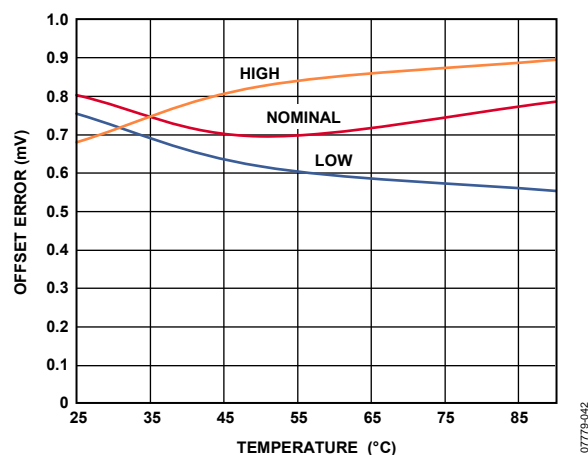


Figure 26. MV Offset Error vs. Temperature, MEASOUT Gain = 1

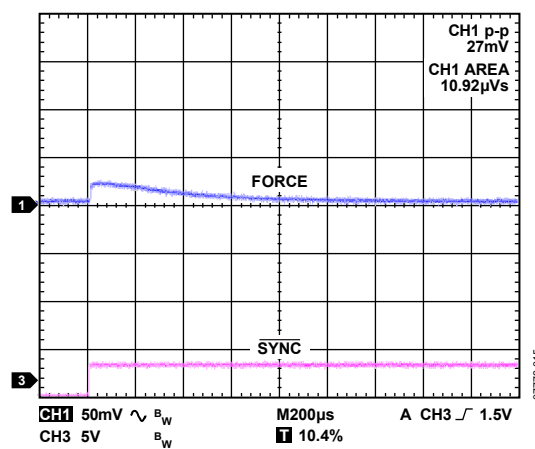
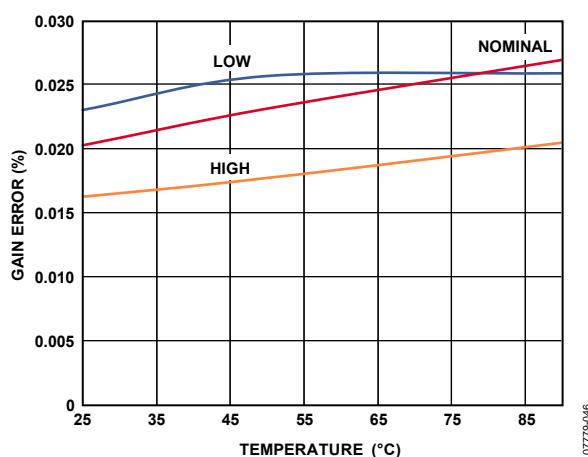
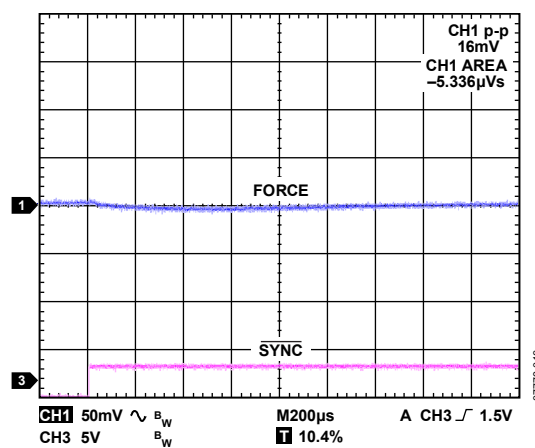
Figure 29. Range Change 2.5 mA to 25 mA, Safe Mode, 2.5 mA I_{LOAD} , 10 μ F Load

Figure 27. MV Gain Error vs. Temperature, MEASOUT Gain = 0.2

Figure 30. Range Change 25 mA to 2.5 mA, Safe Mode, 2.5 mA I_{LOAD} , 10 μ F Load

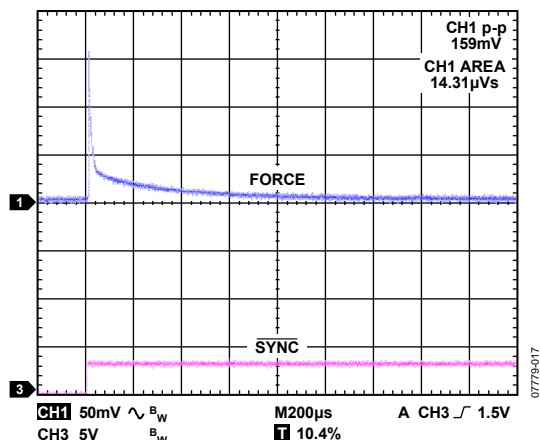


Figure 31. Range Change 25 mA to EXTFORCE2, Safe Mode, 25 mA I_{LOAD} , 10 µF Load

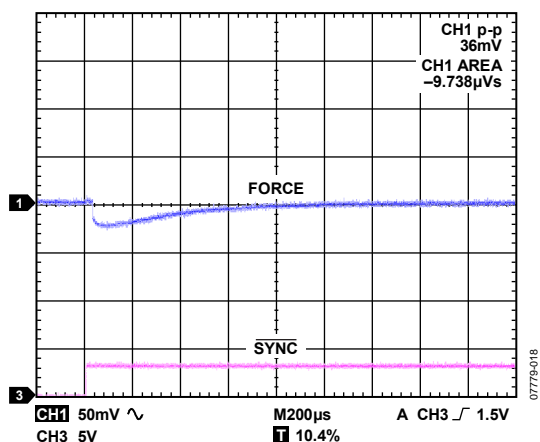


Figure 32. Range Change EXTFORCE2 to 25 mA, Safe Mode, 25 mA I_{LOAD} , 10 µF Load

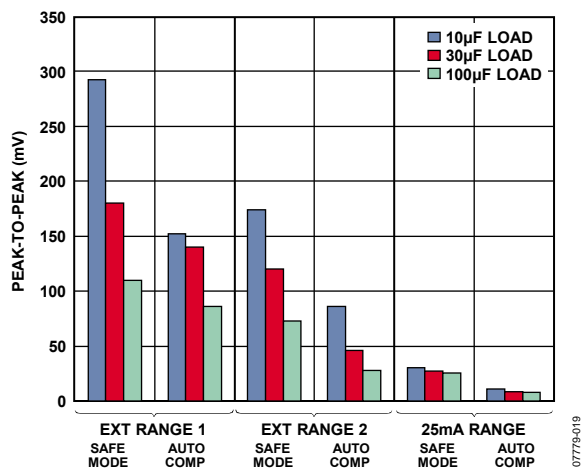


Figure 33. Kick/Droop Response vs. I_{RANGE} , Compensation and C_{LOAD} , 10% to 90% to 10% I_{LOAD} Change

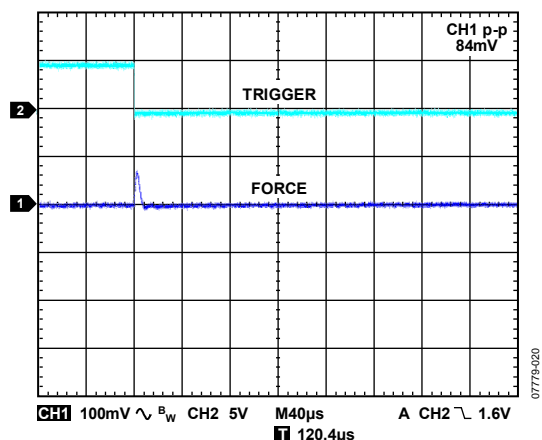


Figure 34. Autocompensation Mode 90% to 10% I_{LOAD} Change, EXTFORCE2 Range, 10 µF Load

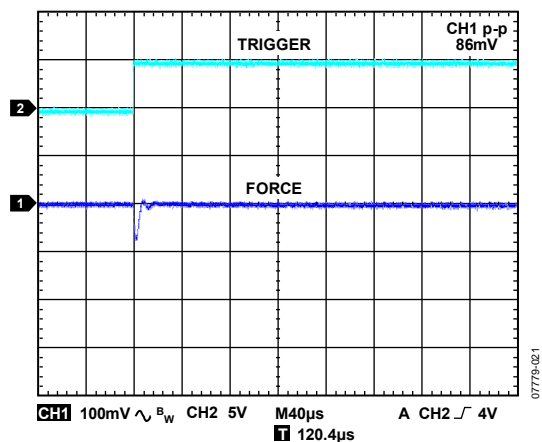


Figure 35. Autocompensation Mode 10% to 90% I_{LOAD} Change, EXTFORCE2 Range, 10 µF Load

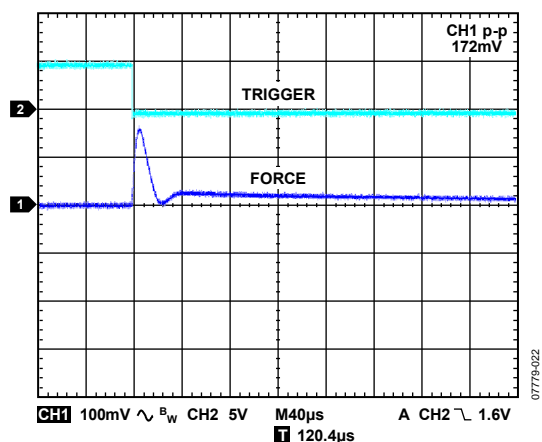


Figure 36. Safe Mode 80% to 10% I_{LOAD} Change, EXTFORCE2 Range, 10 µF Load

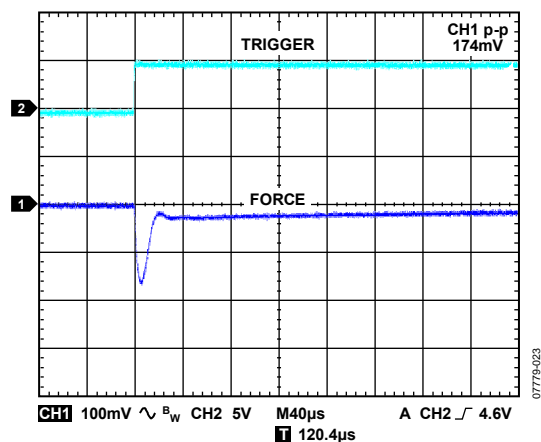
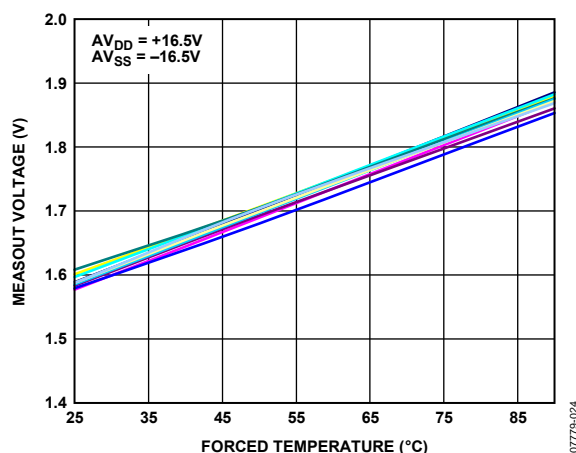
Figure 37. Safe Mode 10% to 90%, EXTFORCE2 Range, 10 μ F Load

Figure 38. MEASOUT TSENSE Temperature Sensor vs. Temperature (Multiple Devices)

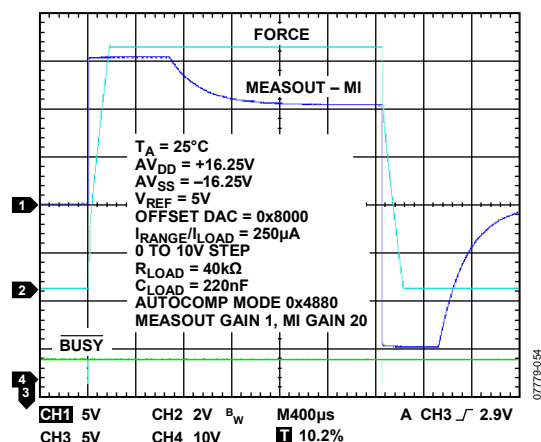
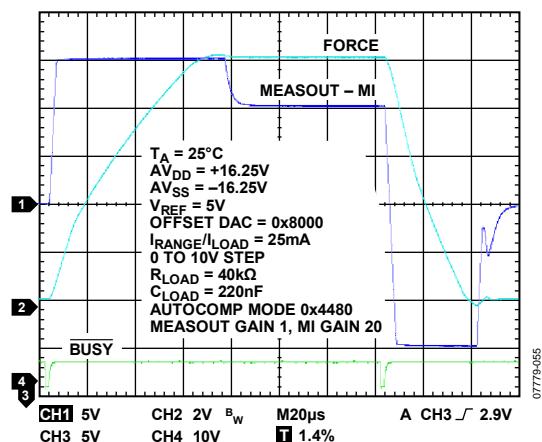
Figure 39. Transient Response FVMI Mode, $\pm 250 \mu$ A Range, Autocompensation Mode

Figure 40. Transient Response FVMI Mode, 25 mA Range, Autocompensation Mode

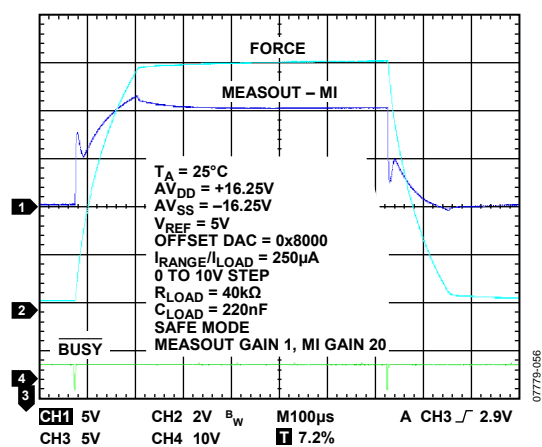


Figure 41. Transient Response FVMI Mode, 25mA Range, Safe Mode

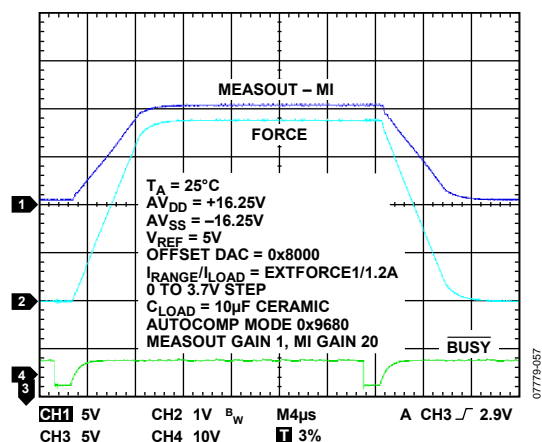


Figure 42. Transient Response FVMI Mode, EXTFORCE1 Range, Autocompensation Mode

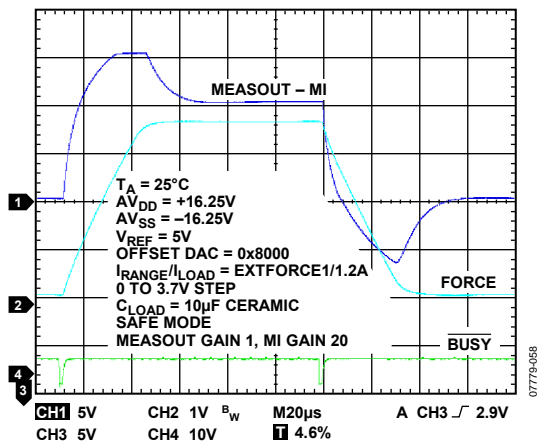


Figure 43. Transient Response FVMI Mode, EXTFORCE1 Range, Safe Mode

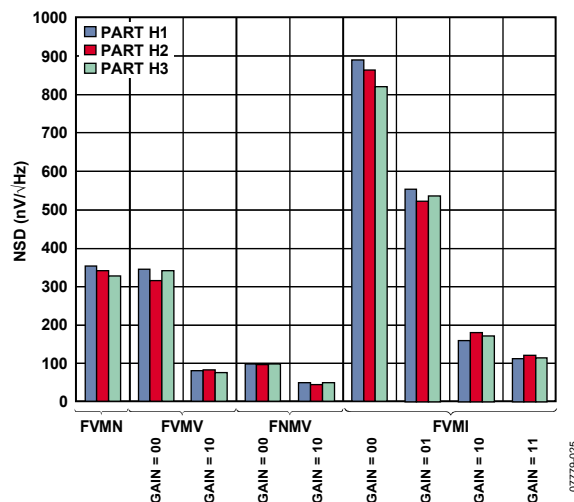


Figure 46. NSD vs. Amplifier Stage and Gain Setting at 1 kHz

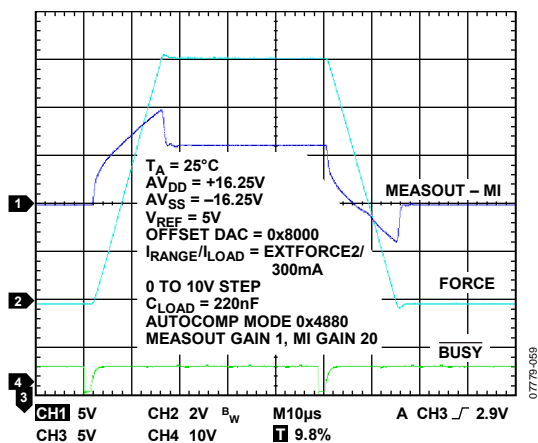


Figure 44. Transient Response FVMI Mode, EXTFORCE2 Range, Autocompensation Mode

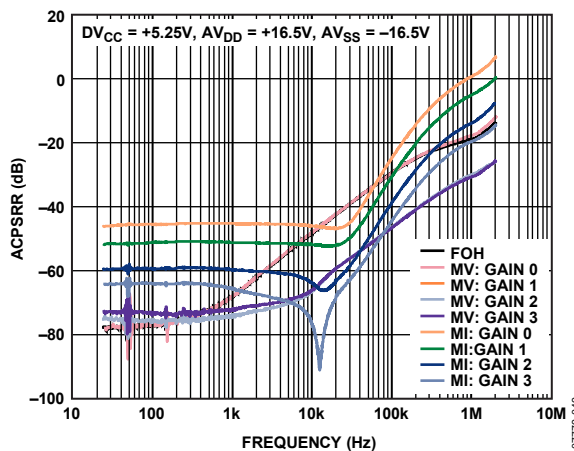


Figure 47. ACPSRR of AV_{DD} vs. Frequency

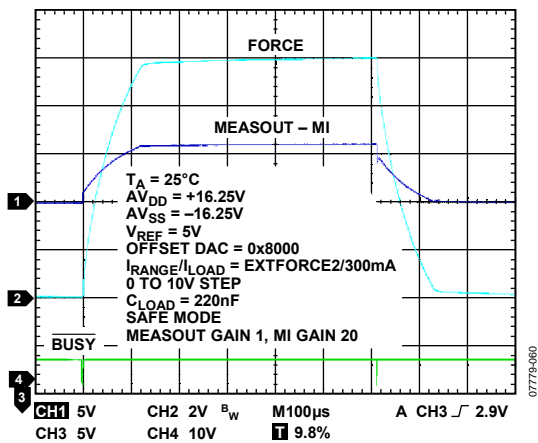


Figure 45. Transient Response FVMI Mode, EXTFORCE2 Range, Safe Mode

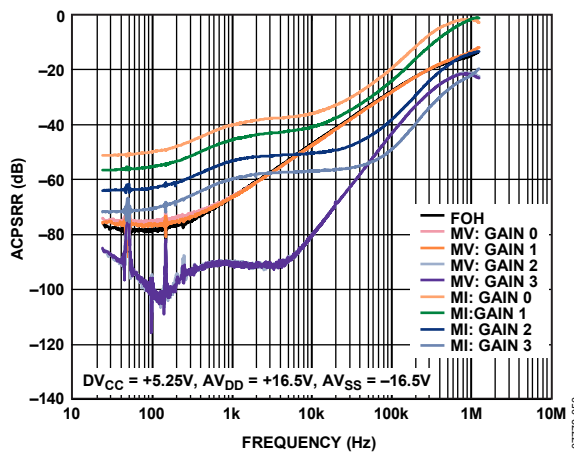


Figure 48. ACPSRR of AV_{SS} vs. Frequency

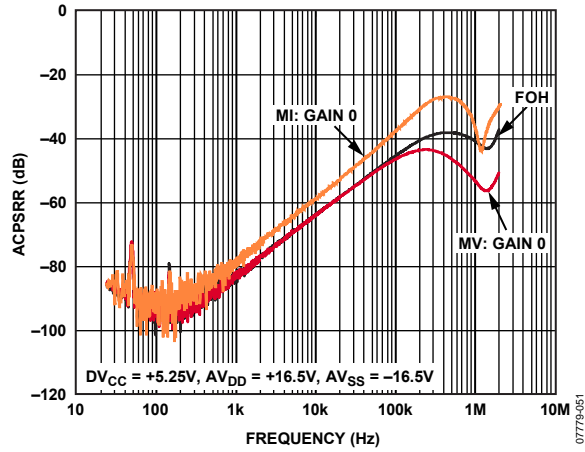


Figure 49. ACPSRR of DV_{CC} vs. Frequency

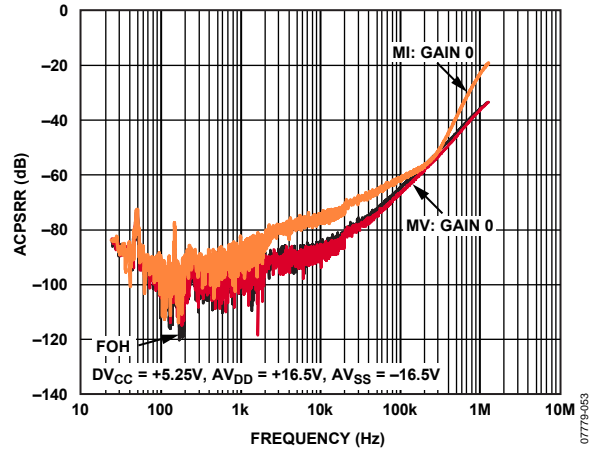


Figure 51. ACPSRR of $HCAV_{SSx}$ vs. Frequency

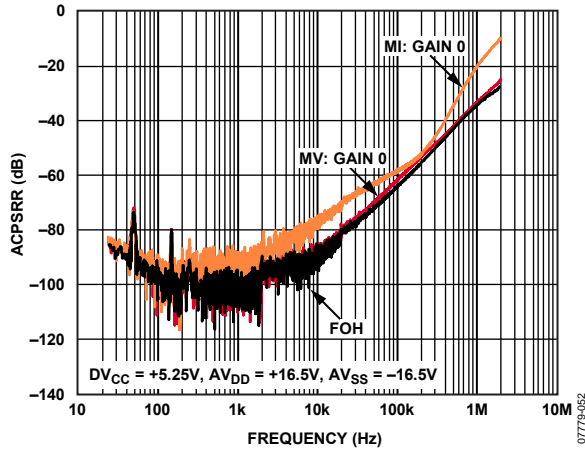


Figure 50. ACPSRR of $HCAV_{DDx}$ vs. Frequency

TERMINOLOGY

Offset Error

Offset error is a measure of the difference between the actual voltage and the ideal voltage at midscale or at zero current expressed in millivolts or % FSR.

Gain Error

Gain error is the difference between full-scale error and zero-scale error. It is expressed in % FSR.

$$\text{Gain Error} = \text{Full-Scale Error} - \text{Zero-Scale Error}$$

where:

Full-Scale Error is the difference between the actual voltage and the ideal voltage at full scale.

Zero-Scale Error is the difference between the actual voltage and the ideal voltage at zero scale.

Linearity Error

Linearity error, or endpoint linearity, is a measure of the maximum deviation from a straight line passing through the endpoints of the full-scale range. It is measured after adjusting for offset error and gain error and is expressed in millivolts.

Common-Mode (CM) Error

CM error is the error at the output of the amplifier due to the common-mode input voltage. It is expressed in % of FSVR/V.

Clamp Limit

Clamp limit is a measure of where the clamps begin to function fully and limit the clamped voltage or current.

Leakage Current

Leakage current is the current measured at an output pin when the circuit connected to that pin is in high impedance state.

Slew Rate

The slew rate is the rate of change of the output voltage expressed in volts per microseconds.

Differential Nonlinearity (DNL)

DNL is the difference between the measured change and the ideal 1 LSB change between any two adjacent codes. A specified DNL of ± 1 LSB maximum ensures monotonicity.

Output Voltage Settling Time

Output voltage settling time is the amount of time it takes for the output of a DAC to settle to a specified level for a full-scale input change.

Digital-to-Analog Glitch Energy

Digital-to-analog glitch energy is the amount of energy that is injected into the analog output at the major code transition. It is specified as the area of the glitch in nV-sec. It is measured by toggling the DAC register data between 0x7FFF and 0x8000.

AC Power Supply Rejection Ratio (ACPSRR)

ACPSRR is a measure of the part's ability to avoid coupling noise and spurious signals that appear on the supply voltage pin to the output of the switch. The dc voltage on the device is modulated by a sine wave of 0.2 V p-p. The ratio of the amplitude of the signal on the output to the amplitude of the modulation is the ACPSRR. It is expressed in decibels.

THEORY OF OPERATION

The AD5560 is a single-channel, device power supply for use in semiconductor automatic test equipment. All the DAC levels required to operate the device are available on chip.

This device contains programmable modes to force a pin voltage and measure the corresponding current (FVMI) covering a wide current measure range of up to ± 1.2 A. A voltage sense amplifier allows measurement of the DUT voltage. Measured current or voltage is available on the MEASOUT pin.

FORCE AMPLIFIER

The force amplifier is a unity gain amplifier forcing voltage directly to the device under test (DUT). This high bandwidth amplifier allows suppression of load transient induced glitching on the amplifier output. Headroom and footroom requirements for the amplifier are 2.25 V and an additional ± 500 mV dropped across the selected sense resistor with full-scale current flowing.

The amplifier is designed to drive high currents up to ± 1.2 A with the capability of ganging together outputs of multiple AD5560 devices for currents in excess of ± 1.2 A.

The force amplifier can be compensated to ensure stability when driving DUT capacitances of up to 160 μ F.

The device is capable of supplying transient currents in excess of ± 1.2 A for cases of powering a DUT with a large decoupling capacitor. A clamp enable pin (CLEN) allows disabling of the clamp circuitry to allow the amplifier to quickly charge this large capacitance.

An extra control bit (GPO) is available to switch out DUT decoupling when making low current measurements.

HW_INH Function

A hardware inhibit pin ($\overline{\text{HW_INH/LOAD}}$) allows disabling of the force amplifier, making the output high impedance. This function is also available through the serial interface, see the SW-INH bit in the DPS Register 1 (Address 0x2).

This pin can also be configured as a $\overline{\text{LOAD}}$ function to allow multiple devices to be synchronized. Note that either CLEN or HW_INH can be chosen as a $\overline{\text{LOAD}}$ function.

DAC REFERENCE VOLTAGE (VREF)

One analog reference input, VREF, supplies all DAC levels with the necessary reference voltage to generate the required dc levels.

OPEN-SENSE DETECT (OSD) ALARM AND CLAMP

The open-sense detect (OSD) circuitry protects the DUT from overvoltage in the case of the force and sense lines of the force amplifier becoming disconnected from each other.

This block performs three functions related to the force and sense lines.

- It clamps the sense line to within a programmable threshold level (plus a V_{BE}) of the force line, where the programmable threshold is set by the OSD DAC voltage level. This limits the maximum or minimum voltage that can appear on the FORCE pin; it can be driven no higher than $[V(F_{IN} \text{ DAC}) + \text{threshold} + V_{BE}]$ and no lower than $[V(F_{IN} \text{ DAC}) - \text{threshold} - V_{BE}]$.
- It triggers an alarm on KELALM if the force line goes more than the threshold voltage away (OSD DAC level) from the sense line.
- It translates the $V(\text{force} - \text{sense})$ voltage to a level relative to AGND so that it can be measured through the MEASOUT pin.

The open-sense detect level is programmable over the range 0.62 V to 5 V (16-bit OSD DAC plus one diode drop). The 5 V OSD DAC can be accessed through the serial interface (see the DAC register addressing portion of Table 24). There is a 10 k Ω resistor that can be connected between the FORCE and SENSE pins by use of SW11. This 10 k Ω resistor is intended to maintain a force/sense connection when a DUT is not in place. It is not intended to be connected when measurements are being made because this defeats the purpose of the OSD circuit in identifying an open circuit between FORCE and SENSE. In addition, the sense path has a 2.5 k Ω resistor in series; therefore, if the 10 k Ω switch is closed, errors may become apparent when in high current ranges.

DEVICE UNDER TEST GROUND (DUTGND)

DUTGND is the ground level of the DUT.

DUTGND Kelvin Sense

KELALM flags if the voltage at the DUTGND pin moves too far away from the AGND line (>1 V default setting of the DGS DAC). This alarm trigger is programmable via the serial interface. The threshold for the alarm function is programmable using the DUTGND SENSE DAC (DGS DAC) (see Table 24).

The DUTGND pin has a 50 μ A pull-up resistor that allows the alarm function to detect if DUTGND is open. Setting the DUTALM bit high (Register 0x6, Bit 10) disables the 50 μ A pull-up resistor and also disables the alarm feature. The alarm feature can also be set to latched or unlatched (Register 0x6, Bit 11).

Kelvin Alarm (KELALM)

The open-drain active low Kelvin alarm pin flags the user if an open occurs in either the sense or DUTGND line; it can be programmed to be either latched or unlatched (Register 0x6, Bit 13, Bit 11, Bit 7). The delay in the alarm flag is 50 μ s.

GPO

The GPO pin can be used as an extra control bit for external switching functions, such as for switching out DUT decoupling when making low current measurements.

The GPO pin is also internally connected to an array of thermal diodes scattered across the AD5560. The diagnostic register (Address 0x7) details the addressing and location of the diodes. These can be used for diagnostic purposes to determine the thermal gradients across the die and across a board containing many AD5560 devices. When selected, the anode of these diodes is connected to GPO and the cathode to AGND. The AD5560 evaluation board uses the ADT7461 temperature sensor for the purpose of analyzing the temperature at different points across the die.

COMPARATORS

The DUT measured value is monitored by two comparators (CPOL, CPOH). These comparators give the advantage of speed for go-no-go testing.

Table 6. Comparator Output Function

Test Condition	CPOL	CPOH
$(V_{DUT} \text{ or } I_{DUT}) > CPH$		0
$(V_{DUT} \text{ or } I_{DUT}) < CPH$		1
$(V_{DUT} \text{ or } I_{DUT}) > CPL$	1	
$(V_{DUT} \text{ or } I_{DUT}) < CPL$	0	
$CPH > (V_{DUT} \text{ or } I_{DUT}) > CPL$	1	1

To minimize the number of comparator output lines routed back to the controller, it is possible to change the comparator function to a window comparator that outputs on one single pin, CPO. This pin is shared with CPOH and when configured through the serial interface, it provides information on whether the measured DUT current or voltage is inside or outside the window set by the CPL and CPH DAC levels (see Table 24).

Table 7. Comparator Output Function in CPO Mode

Test Condition	CPO Output
$(V_{DUT} \text{ or } I_{DUT}) > CPL \text{ and } < CPH$	1
$(V_{DUT} \text{ or } I_{DUT}) < CPL \text{ or } > CPH$	0

CURRENT CLAMPS

High and low current clamps are included on chip. These protect the DUT in the event of a short circuit. The CLH and CLL levels are set by the 16-bit DAC levels. The clamp works to limit the current supplied by the force amplifier to within the set levels. The clamp circuitry compares the voltage across the sense resistor (multiplied by an in-amp gain of 10 or 20) to compare to the programmed clamp limit and activates the clamp circuit if either the high level or low level is exceeded, thus ensuring that the DUT current can never exceed the programmed clamp limit + 10% of full-scale current.

If a clamp level is exceeded, this is flagged via the latched open-drain \overline{CLALM} pin and the resulting alarm information can be read back via the SPI interface.

The clamp levels should not be set to the same level; instead, they should be set a minimum of 2 V apart (irrespective of MI gain setting). This equates to 10% of FSCR (MI gain = 20) (20% of FSCR, MI gain of 10) apart. They should also be 1 V away from the 0 A level.

The clamp register limits the CLL clamp to the range 0x0000 to 0x7FFF; any code in excess of this is seen as 0x7FFF. Similarly, the CLH clamp registers are limited to the range 0x8000 to 0xFFFF (see Table 24).

Clamp Alarm Function (\overline{CLALM})

The \overline{CLALM} open-drain output flags the user if a clamp limit has been hit, it can be programmed to be either latched or unlatched.

Clamp Enable Function ($\overline{CLEN/LOAD}$)

Pin 15 (CLEN) allows the user to disable the clamping function when powering a device with large DUT capacitance, thus allowing increased current drive to the device and, therefore, speeding up the charging time of the load capacitance. CLEN is active high.

This pin can also be configured as \overline{LOAD} to allow multiple devices to be synchronized. Note that either CLEN or $\overline{HW_INH}$ can be chosen as a \overline{LOAD} function.

SHORT-CIRCUIT PROTECTION

The AD5560 force amplifier stage has built-in short-circuit protection per stage as noted in the Specifications section. In the event that the current clamps are disabled, the user must minimize the duration of time that the device is left in a short-circuit condition (for all current ranges).

GUARD AMPLIFIER

A guard amplifier allows the user to force the shield of the coaxial cable to be driven to the same forced voltage at the DUT, ensuring minimal voltage drops across the cable to minimize errors from cable insulation leakage.

The guard amplifier also has an alarm function that flags the open-drain \overline{KELALM} pin in the event of the guard output being shorted. The delay in the alarm flag is 200 μ s.

The guard amplifier output (GUARD/SYS_DUTGND, Pin 43) can also be configured to function as a SYS_DUTGND pin; to do this, the guard amplifier needs to be tristated via software (see DPS Register 2, Table 19).

COMPENSATION CAPACITORS

The force amplifier is capable of driving DUT capacitances up to 160 μ F. Four external compensation capacitor (C_{CX}) inputs are provided to ensure stability into the maximum load capacitance while ensuring that settling time is optimized. In addition, five C_{FX} capacitor inputs are provided to switch across the sense

Master in FV Mode, Slaves in Force Current (FI) Mode

The master device is placed into FV mode and all slave devices into force current (FI) mode. The measured current of the master device (MASTER_OUT) is applied to the input of all slave devices (SLAVE_IN) and the slaves act as followers. All channels work to share the current equally among all devices in the gang. Because the slaves force current, matching the DUT paths is not so critical. Settings for DPS Register 2 are master = 0x0200, slave = 0x0600. Clamps should be disabled in the slave devices.

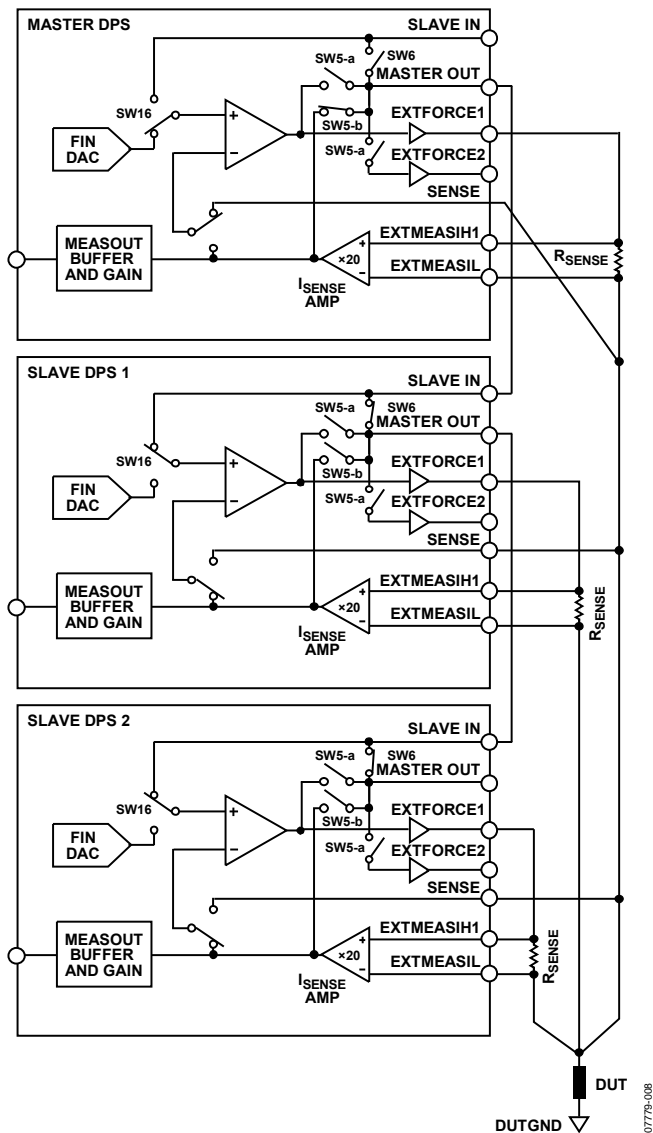


Figure 53. Simplified Block Diagram of Gang Mode, Using an FV/FI Combination

The EXTFORCE1, EXTFORCE2, or ± 25 mA ranges can be used for the gang mode. Therefore, it is possible to gang devices to get a high voltage/high current combination, or a low voltage/high current combination.

For example, ganging five 25 V/25 mA devices using the 25 mA range achieves a 25 V/625 mA range, while five 15 V/ 200 mA devices using the EXTFORCE2 path can achieve a 15 V/1 A range. Similarly, ganging four 3.5 V/1.2 A devices using the EXTFORCE1 path results in a 3.5 V/4.8 A DPS.

IDEAL SEQUENCE FOR GANG MODE

Use the following steps to bring devices into and out of gang mode.

1. Choose the master device and force 0 V output, corresponding to zero current.
2. Select slave DPS 1 and place it in slave mode (keep slaves in high-Z mode via $\overline{\text{SW_INH}}$ or $\overline{\text{HW_INH}}$ until ready to gang).
3. Select to gang in either current or voltage mode.
4. Repeat Step 2 and Step 3 one at a time through the chain of slaves.
5. Load the required voltage to the master device. The other devices copy either voltage or current as programmed.

To remove devices from the gang, the master device should be programmed to force 0 V out again. The procedure for removing devices should be the reverse of Step 1 through Step 5.

Note that this may not always be possible in practice; therefore, it is also possible to gang and ungang while driving a load. Just ensure that the slave devices are in high-Z mode while configuring them into the required range and gang setting.

Gang mode extends only to the ± 25 mA range and the two high current ranges, EXTFORCE1 and EXTFORCE2. Therefore, where an accurate measurement is required at a low current, the user should remove slaves from the gang to move to the appropriate lower current range to make the measurement. Similarly, slaves can be brought back into the gang if needed.

COMPENSATION FOR GANG MODE

When ganging, the slave devices should be set to the fastest response.

When slaves are in FI mode, the AD5560 force amplifier overrides other compensation settings to enforce $C_F = 0$, $R_z = 0$, and $g_m \leq 1$. This is done internally to the force amplifier, so read-back won't show that the signals inside the force amplifier actually change.

SYSTEM FORCE/SENSE SWITCHES

System force/sense switches allow easy connection of a central or system parametric measurement unit (PMU) for calibration or additional measurement purposes.

The system device under test ground (SYS_DUTGND) switch is shared with the GUARD/SYS_DUTGND pin (Pin 43). See the DPS Register 2 in Table 19 for addressing details.

DIE TEMPERATURE SENSOR AND THERMAL SHUTDOWN

There are three types of temperature sensors in the AD5560.

- The first is a temperature sensor available on the MEASOUT pin and expressed in voltage terms. Nominally at 25°C, this sensor reads 1.54 V. It has a temperature coefficient of 4.7 mV/°C. This sensor is active during power-down mode.
- The second type of temperature sensor is related to the thermal shutdown feature in the device. Here, there are sensors located in the middle of the enabled power stage, which are used to trip the thermal shutdown. The thermal shutdown feature only senses the power stages, and the power stage that it senses is determined by the active stage. If ranges of <25 mA are selected, the EXTFORCE1 sensor is monitored. The EXTFORCE1 power stage itself is made up of three identical stages, but the thermal shutdown is only activated by one stage (EXTFORCE1B). Similarly, the EXTFORCE2 stage is made up of two identical output stages, but the thermal shutdown can only be activated by one stage, (EXTFORCE2A). The thermal shutdown circuit monitors these sensors and, in the event of the die temperature exceeding the programmable threshold temperature (100°C, 110°C, 120°C, 130°C (default)), the device protects itself by inhibiting the force amplifier stage, clearing SW-INH in DPS Register 1 and flagging the overtemperature event via the open-drain TMPALM pin, which can be programmed to be either latched or unlatched. These temperature sensors can be read via the MEASOUT pin by selecting them in the diagnostic register (Table 23, VPTAT low and VPTAT high). They are expressed in voltage and to scale to temperature. They must be referred to the VTSD reference voltage levels (see Table 23) also available on MEASOUT. This set of sensors is not active in power-down mode.

$$\text{Die Temp} = (VPTATx - VTSD_high) / [(VTSD_high - VTSD_low) / (130^\circ\text{C} - (-273))]]$$

where VPTATx is VPTAT high and is located in the NPN output stage, and low is in the PNP output stage (see Table 23, Bits[15:12]).

- The third set of temperature sensors is an array of thermal diodes scattered across the die. These diodes allow the user to evaluate the temperature of different parts of the die and are of great use to determine the temperature gradients across the die and the temperature of the accurate portions of the die when the device is dissipating high power. For further details on the thermal array and locations, see the diagnostic register section in Table 23. These diodes can be muxed out onto the GPO pin. The diagnostic register (Address 0x7) details the addressing and location of the diodes. These can be used for diagnostic purposes to determine the thermal gradients across the die and across a board containing many AD5560 devices. When selected,

the anode of each diode is connected to GPO and the cathode to AGND. The AD5560 evaluation board uses the ADT7461 temperature sensor for the purpose of analyzing the temperature at different points across the die.

Note that, when a thermal shutdown occurs, as the force amplifier is inhibited or tristated, user intervention is required to reactivate the device. It is necessary to clear the temperature alarm flag by issuing a read command of Register Address 0x44, (alarm status and clear alarm register, Table 25), and then issuing a new write to the DPS Register 1 (SW-INH = 1) in order to re-enable the force amplifier.

MEASURE OUTPUT (MEASOUT)

The measured DUT voltage, current (voltage representation of DUT current), K_{SENSE} , or die temperature is available on MEASOUT with respect to AGND. The default MEASOUT range is the forced voltage range for voltage measure and current measure (nominally ± 12.81 V, depending on reference voltage and offset DAC) and includes overrange to allow for system error correction.

The serial interface allows the user to select another MEASOUT range of $(1.025 \times V_{\text{REF}})$ to AGND, a smaller input range ADC to be used.

To allow for system error correction, there is additional gain for the force function. If this overrange is used as intended, the output range on MEASOUT scales accordingly.

The MEASOUT line can be tristated via the serial interface.

When using low supply voltages, ensure that there is sufficient headroom and footroom for the required force voltage range.

V_{MID} VOLTAGE

The midcode voltage (V_{MID}) is used in the measure current amplifier block to center the current ranges at about 0 A. This is required to ensure that the quoted current ranges can be achieved when using offset DAC settings other than the default. V_{MID} corresponds to 0x8000 or the DAC midcode value, that is, the middle of the voltage range set by the offset DAC setting (see Table 15 and Figure 54).

$$V_{\text{MID}} = 5.125 \times V_{\text{REF}} \times (32,768/2^{16}) - (5.125 \times V_{\text{REF}} \times (\text{OFFSET_DAC_CODE}/2^{16}))$$

or

$$V_{\text{MID}} = 5.125 \times V_{\text{REF}} \times ((32,768 - \text{Offset DAC})/2^{16})$$

V_{MIN} is another important voltage level that is used in other parts of the circuit. When using a MEASOUT gain of 0.2, the V_{MIN} level is used to scale the voltage range; therefore, when choosing supply rails, it is very important to ensure that there is sufficient footroom so that the V_{MIN} level is not impinged on (the high voltage DAC amplifiers used here require approximately 2 V footroom to AV_{SS}). See the Choosing AVDD/AVSS Power Supply Rails section for more information.

$$V_{\text{MIN}} = -5.125 \times V_{\text{REF}} \times (\text{OFFSET_DAC_CODE}/2^{16})$$

AD5560

Table 9. MEASOUT Output Ranges

MEASOUT Function GAIN1 = 0, MEASOUT Gain = 1			Transfer Function	Output Voltage Range ¹		
				Offset DAC = 0x0	Offset DAC = 0x8000	Offset DAC = 0xE000
Measure Voltage (MV)			$\pm V_{DUT}$	0 V to 25.62 V	± 11.25 V	–22.42 V to +3.2 V
Measure Current (MI)	GAIN0 = 0	MI gain = 20	$(I_{DUT} \times R_{SENSE} \times 20) + V_{MID}$	0 V to 25.62 V	± 11.25 V	–22.42 V to +3.2 V
	GAIN0 = 1	MI gain = 10	$(I_{DUT} \times R_{SENSE} \times 10) + V_{MID}$	0 V to 12.81 V (VREF = 2.5 V)	± 6.4 V (VREF = 2.5 V)	–11.2 V to +1.6 V (VREF = 2.5 V)

¹ VREF = 5 V, unless otherwise noted.

Table 10.

MEASOUT Function GAIN1 = 1, MEASOUT Gain = 0.2			Transfer Function	Output Voltage Range ^{1, 2}
Measure Voltage (MV)			MV = 0.2 x (V _{DUT} + V _{MIN})	0 V to 5.12 V (±2.56 V centered around 2.56 V) (includes overrange)
Measure Current (MI)	GAIN0 = 0	MI gain = 20	(I _{DUT} × R _{SENSE} × 20 × 0.2)+0.5125 × VREF	0 V to 5.12 V (±2.56 V centered around 2.56 V) (includes overrange)
	GAIN0 = 1	MI gain = 10	(I _{DUT} × R _{SENSE} × 10 × 0.2) +0.5125 × VREF	1.28 V to 3.84 V (±1.28 V, centered around 2.56 V)
				0 V to 2.56 V (±1.28 V, centered around 1.28 V) (VREF = 2.5 V)

¹ VREF = 5 V, unless otherwise noted.

² The offset DAC setting has no effect on the output voltage range.


Table 11. Possible ADCs and ADC Drivers for Use With AD5560¹

Part No.	Resolution	Sample Rate	Channels	AIN Range	Interface	ADC Driver	Multiplexer ²	Package
AD7685	16	250 kSPS	1	0 to VREF	Serial, SPI	ADA4841-x	ADG704, ADG708	MSOP, LFCSP
AD7686	16	500 kSPS	1	0 to VREF	Serial, SPI	ADA4841-x	ADG704, ADG708	MSOP, LFCSP
AD7693	16	500 kSPS	1	–VREF to +VREF	Serial, SPI	ADA4841-x, ADA4941-1	ADG1404, ADG1408, ADG1204	MSOP, LFCSP
AD7610 ³	16	250 kSPS	1	Bipolar 10 V, bipolar 5 V, unipolar 10 V, unipolar 5 V	Serial, parallel	AD8021	AD1404, ADG1408, ADG1204	LFCSP, LQFP
AD7655	16	1 MSPS	4	0 V to 5 V	Serial, SPI	ADA4841-x/ AD8021		LQFP, LFCSP

¹ Subset of the possible ADCs, ADC drivers, and multiplexers suitable for use with the AD5560. Visit <http://www.analog.com> for more options.

² For the purposes of sharing ADCs among multiple DPS channels, note that the multiplexer is not absolutely necessary as the AD5560 MEASOUT path has a tristate mode.

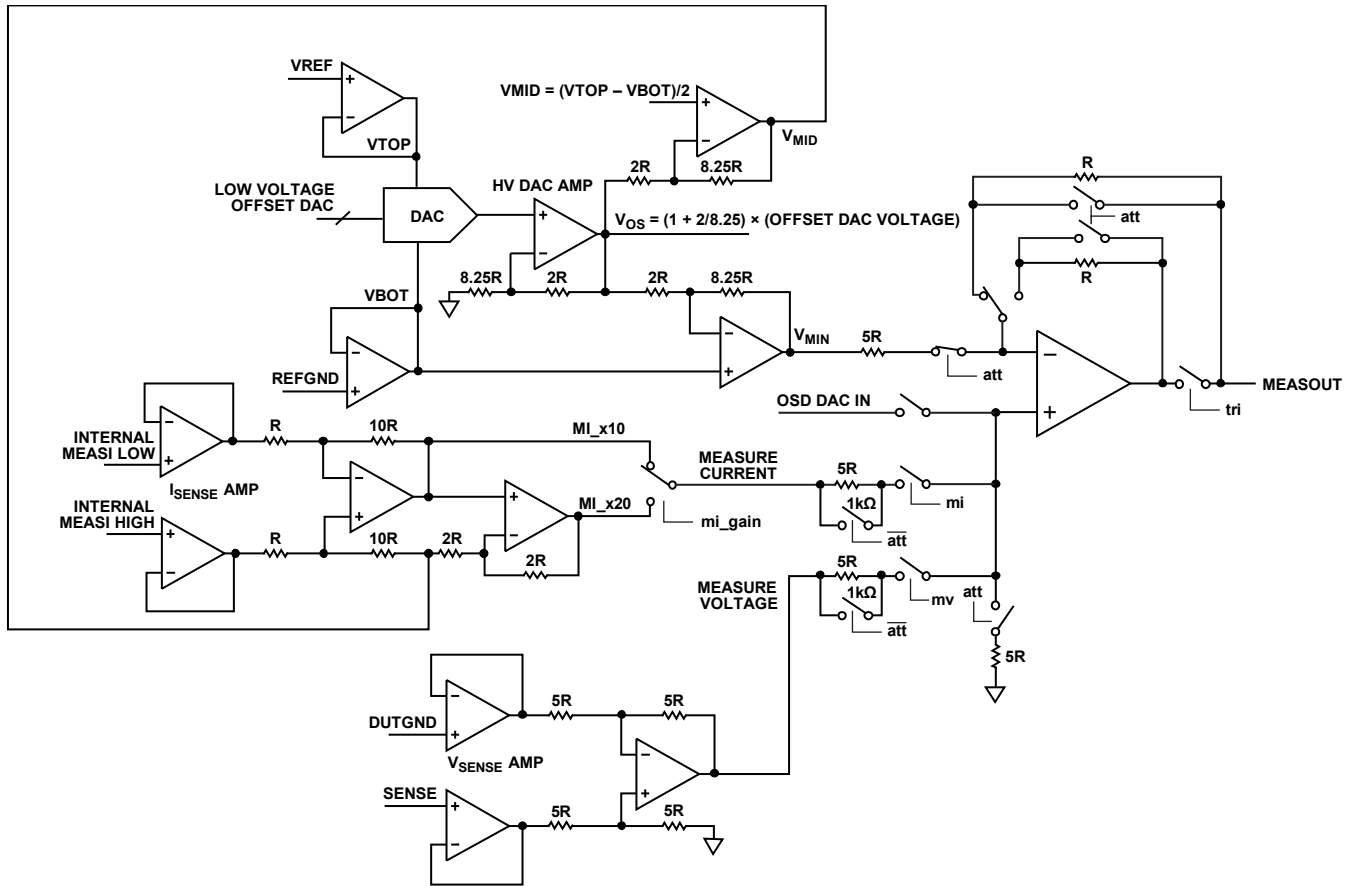³ Do not allow the MEASOUT output range to exceed the AIN range of the ADC.



NOTES

1. att: ATTENUATION FOR EXTERNAL MEASOUT $\times 0.20$ FOR OUTPUT VOLTAGE RANGE 0V TO 5.125V (WITH OVERRANGE) ($V_{REF} = 5V$).
 tri: TRISTATE MODE
 mv: MEASURE VOLTAGE
 mi: MEASURE CURRENT
 mi_gain: MEASURE I GAIN SELECTION

Figure 54. MI, MV, and MEASOUT Block Showing Gain Settings and Offset DAC Influence

FORCE AMPLIFIER STABILITY

There are three modes for configuring the force amplifier: safe mode, autocompensation mode, and manual compensation mode. Manual compensation mode has highest priority, followed by safe mode, then autocompensation mode.

Safe Mode

Selected through Compensation Register 1, this mode guarantees stability of the force amplifier under all conditions. Where the load is unknown, this mode is useful but results in a slow response. This is the power-on default of the AD5560.

Autocompensation Mode

Using this mode, the user inputs the C_R and ESR values and the AD5560 decides the most appropriate compensation scheme for these load conditions. The compensation chosen is for an optimum tradeoff between ac response and stability.

Manual Compensation Mode

This mode allows access to all of the internal programmable parameters to configure poles/zeros, which affect the dynamic performance of the loop. These variables are outlined in Table 12 and Table 13.

Figure 55 shows more details of the force amplifier block.

Table 12. External Variables

Name	Description	Min	Max
C_R	DUT capacitance with contributing ESR	10 nF	160 μ F
R_C	ESR in series with C_R	1 m Ω	10 Ω
C_D	DUT capacitance with negligible ESR	100 pF	10 nF
R_D	Loading resistance at the DUT	\sim 2 Ω	Infinity
I_R	Current range	\pm 5 μ A	\pm 1.2 A

Table 13. Internal Variables

Name	Description	Min	Max
R_z	Resistor in series with C_{C0} which contributes a zero.	500 Ω	1.6 M Ω
R_p	Resistor to 8 pF to contribute an additional pole	200 Ω	1 M Ω
$C_{C0}:C_{C3}$	Capacitors to ensure unconditional stability	100 pF	100 nF
$C_{F0}:C_{F4}$	Capacitors to optimize ac performance into different C_{R_V} C_D	4.7 nF	10 μ F
gm	Transconductance of force amplifier input stage	40 μ A/V	900 μ A/V

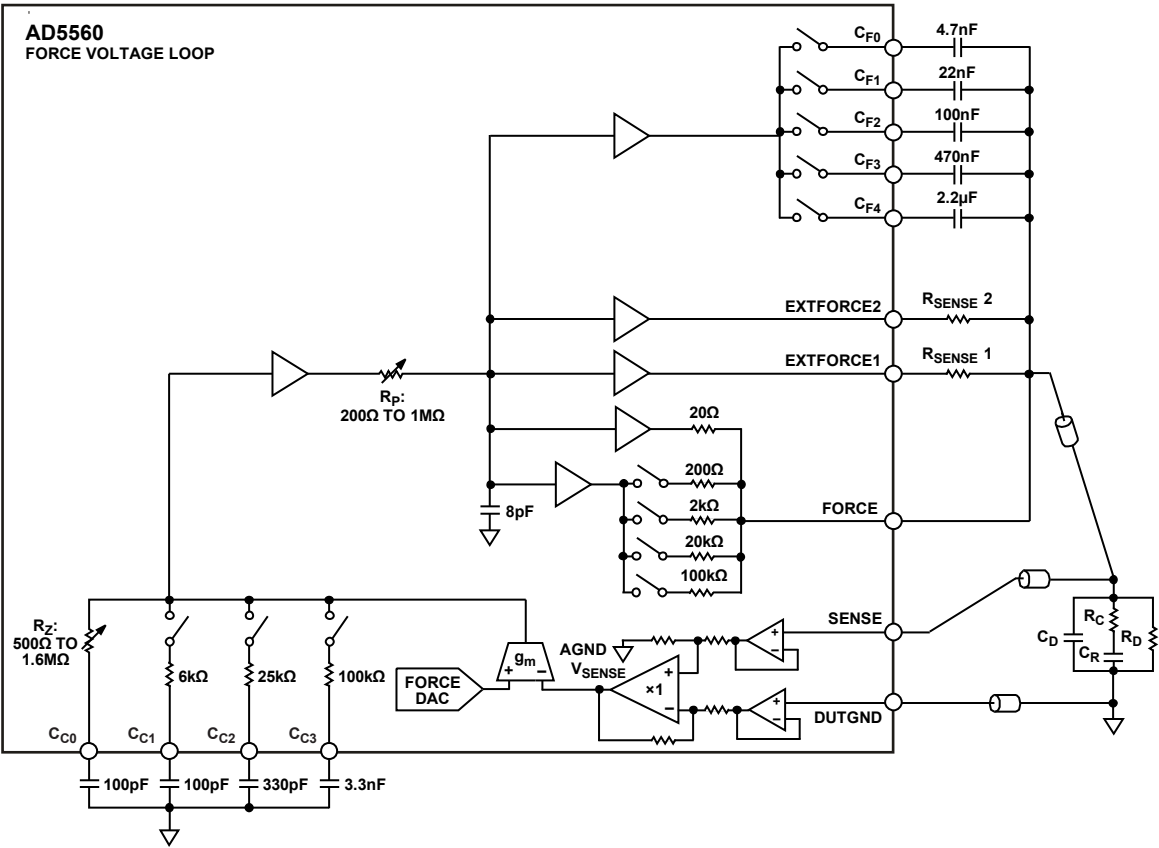


Figure 55. Block Diagram of Force Amplifier Loop

07779-010

POLES AND ZEROS IN A TYPICAL SYSTEM

Typical closed loop systems have one dominant pole in the feedback path, providing -20 dB/decade gain roll off and 90° of phase shift so that the gain decreases to 0 dB where there is a conservative 90° of phase margin.

The AD5560 has various compensation options to help cope with the various load conditions that a DPS is presented with.

MINIMIZING THE NUMBER OF EXTERNAL COMPENSATION COMPONENTS

Note that, depending on the range of load conditions, not all external capacitors are required.

C_{Fx} Pins

There are five external C_{Fx} pins. All five of these pins are used in the autocompensation mode to choose a suitable capacitor, depending on the load being driven. To reduce component count, it is possible to connect just one capacitor, for instance, C_{F2} to the C_{F2} , C_{F1} , and C_{F0} pins. Therefore, when any of the smallest three external capacitors are selected, the same physical capacitor is used because it is connected to all three pins. A disadvantage here is that the larger C_{F2} capacitor should be bigger than optimal and may increase settling time of the whole circuit (particularly the measure current).

C_{Cx} Pins

To make the AD5560 stable with any unknown capacitor from 0 pF to 160 μ F, all four C_{Cx} capacitors are required. However, if the range of load is from 0 pF to 20 μ F, then C_{C3} can be omitted. Similarly, if the load range is from 0 pF to 2.2 μ F, then C_{C2} and C_{C3} can be omitted. Only C_{C0} is required in autocompensation mode.

Note that safe mode, which makes the device stable in any load from 0 pF to 160 μ F, simply switches in all of the four C_{Cx} capacitors. Stability into 160 μ F is assured only if all four capacitors are present; otherwise, the maximum capacitor for stability is reduced to 20 μ F, 2.2 μ F, or 220 nF, depending on how many capacitors are missing.

EXTRA POLES AND ZEROS IN THE AD5560

The Effect of C_{Cx}

C_{C0} is switched on at all times. C_{C3} , C_{C2} , and C_{C1} can be connected in addition to C_{C0} to slow down the force amplifier loop. In the ± 500 mA range looking into a small load capacitor, with only C_{C0} connected, the ac gain vs. phase response results in $\sim 90^\circ$ of phase margin and a unity gain bandwidth (UGB) of ~ 400 kHz.

The Effect of C_{Fx}

The output of the AD5560 passes through a sense resistor to the DUT. Coupled with the load capacitor, this sense resistor can act as a low-pass filter that adds phase shift and decreases phase margin (particularly in the low current ranges where the sense resistors are large).

Placing a capacitor in parallel with this sense resistor provides an ac feedforward path to the DUT. Therefore, at high frequencies, the DUT is driven through the C_{Fx} capacitor rather than through the sense resistor.

Note that each C_{Fx} output has an output impedance of about $1\ \Omega$. This is very small compared to the sense resistors of the low current ranges but not so for the highest current ranges. Therefore, the C_{Fx} capacitors are most effective in the low current ranges but are of lesser benefit in higher current ranges.

As shown in the force amplifier diagram (see Figure 55), there is a pole at $1/(R_{SENSE} \times [C_F + C_R])$ and a zero at $1/[R_{SENSE} \times C_F]$. Therefore, the output impedance of each C_{Fx} output, at around $1\ \Omega$, limits the improvement available by using the C_{Fx} capacitors. For a large load capacitance, there is still a pole at $-1/[1\ \Omega \times C_R]$ above which the phase improvement is lost. If there is also a cable resistance to the DUT, or if C_{Fx} has significant ESR, this should be added to the $1\ \Omega$ to calculate the pole frequency.

If C_{Fx} is chosen to be bigger than the load capacitance, it can dominate the settling time and slow down the settling of the whole circuit. Also, it directly affects the time taken to measure a current ($R_{SENSE} \times C_{Fx}$).

The Effect of R_z

When the load capacitance is known, R_z can be used to optimize the response of the AD5560. Because the C_{Fx} buffers have some output impedance of about $1\ \Omega$, there is likely to be some additional resistance to the DUT. There can still be an output pole associated with this resistance and the load capacitance, C_R , $1/[R_0 \times C_R]$ (where R_0 = the series/parallel combination of the sense resistor, the C_{Fx} output impedance, the C_{Fx} capacitor ESR, and the cable to DUT). This is particularly significant for larger load capacitances in any current range. By programming a zero into the loop response by setting R_z (in series with C_{C0}), it is possible to cancel this pole. Above the frequency $1/[C_{C0} \times R_z]$, the series resistance and capacitance begins to look resistive rather than capacitive, and the 90° phase shift and 20 dB/decade contributed by C_{C0} no longer applies. Note that, to cancel the load pole with the R_z zero, the load pole must be known to exist. Adding a zero to cancel a pole that does not exist causes an oscillation (perhaps the expected load capacitor is not present). Also, it is recommended to avoid creating a zero frequency lower than the pole frequency; instead, allow the zero frequency to be $2\times$ or $3\times$ higher than the calculated pole frequency.

The Effect of R_p

R_p can be used to ensure circuit stability when a poor load capacitor with significant ESR is present. Above the frequency, $1/[C_R \times R_C]$, the DUT begins to look resistive. The ESR of the DUT capacitor, R_C , contributes a zero at this frequency. The load capacitor, C_R , is counted on to stabilize the system when the user has cancelled the load pole with the R_z zero. Just as the absence of C_R under these circumstances can cause oscillations, the presence of ESR R_C while nonzero R_z is used can cause

stability problems. This is most likely to be the case when there is both a large C_R and large R_C .

The R_p resistor is intended to solve this problem. Again, it is prudent not to cancel exact pole/zero cancellation with R_z and instead allow the zero to be $2\times$ to $3\times$ the frequency of the pole. It is best to be very conservative when using R_z to cancel the load pole. Choose a high zero frequency to avoid flat spots in the gain curve that extend bandwidth, and be conservative when choosing R_p to create a pole. Aim to place the R_z zero at $5\times$ the exact cancellation frequency and the R_p pole at around $2\times$ the exact cancellation frequency. The best solution here is to avoid this complexity by using a high quality capacitor with low ESR.

COMPENSATION STRATEGIES

Ensuring Stability into an Unknown Capacitor up to a Maximum Value

If the AD5560 has to be stable in a range of load capacitance from no load capacitance to an upper limit, then select manual compensation mode and in Compensation Register 2 set the parameters according to the maximum load capacitance listed in Table 14.

Table 14. Suggested Compensation Settings for Load Capacitance Range of Unknown Value to Some Maximum Value

Capacitor		gm[1:0]	Rp[2:0]	Rz[2:0]	Cc[3:1]	CF[2:0]
Min	Max					
0	0.22 μ F	2	0	0	000	2
0	2.2 μ F	2	0	0	001	3
0	10 μ F	2	0	0	010	4
0	20 μ F	2	0	0	011	4
0	160 μ F	2	0	0	111	4

Table 14 assumes that the C_{Cx} and C_{Fx} capacitor values are those suggested in Table 8.

Making a circuit stable over a range of load capacitances for no load capacitance or greater means that the circuit is overcompensated for small load capacitances, undercompensated for high load capacitances, or both. The previous choice settings, along with the suggested capacitor values, is a compromise between both. By compromising phase margin into the largest load capacitors, the system bandwidth can be increased which means better performance under load current transient conditions. The disadvantage is that there is more overshoot during a large DAC step. To reduce this at the expense of settling time, it may be desirable to temporarily switch a capacitor range $5\times$ or $10\times$ larger before making a large DAC step.

OPTIMIZING PERFORMANCE FOR A KNOWN CAPACITOR USING AUTOCOMPENSATION MODE

The autocompensation mode decides what values of gm, Cc, CF, Rz, and Rp should be chosen for good performance in a particular capacitor. Both the capacitance and its ESR need to be known. To avoid creating an oscillator, the capacitance should not be overestimated and the ESR should not be underestimated. Use the following steps to determine compensation

settings when utilizing the manual compensation register (this algorithm is what the autocompensation method is based upon):

1. Use C_r (the load capacitance with a series ESR) and R_c (the ESR of that load capacitance) as inputs.
2. Assume that C_r has not been overestimated and that R_c has not been underestimated. (Although, when the ESR R_c is shown to have a frequency dependence, the lowest R_c that occurs near the resonant frequency is probably a better guide. However, do not underestimate this ESR).
 - a. C_{C0} is the suggested 100 pF.
 - b. C_{Fx} capacitor values are as suggested, and they extend up to 2.2 μ F (C_{F4}). For faster settling into small capacitive loads, include smaller C_{Fx} values such as C_{F3} and C_{F2} . If a capacitor is not included, then short the corresponding C_{Fx} pin to one that is.
 - c. There is approximately 1 Ω of parasitic resistance, R_c , from the AD5560 to the DUT (for example, the cable); $R_c = 1 \Omega$.
3. Select gm[1:0] = 2, Cc[3:1] = 000. This makes the input stage of the force amplifier; have gm = 300 μ A/V; deselect the compensation capacitors, C_{C1} , C_{C2} , C_{C3} , so that only C_{C0} is active.
4. Choose a CF[2:0] value from 0 to 4 to select the largest CF capacitor that is smaller than C_r .
5. If $C_r < 100$ nF, then set Rz[2:0] = 0, Rp[2:0] = 0. This ends the algorithm.
6. Calculate R_o , the resistive impedance to the DUT, using the following steps:
 - a. Calculate R_s , the sense resistor, from the selected current range using $R_s = 0.5 \text{ V}/I_{\text{RANGE}}$.
 - b. Calculate R_f , the output impedance, through the C_{Fx} capacitor, by using

$$R_f = 1.2 \Omega + (\text{ESR of } C_{Fx} \text{ capacitor})$$
 - c. Calculate R_{fm} , a modified version of R_f , which takes account of frequency dependent peaking, through the CF buffers into a large capacitive load, by using

$$R_{fm} = R_f / (1 + [2 \times (C_{Fx} / 2.2 \mu\text{F})])$$
 That is, R_{fm} is up to $3\times$ smaller than R_f , when the selected C_{Fx} capacitor is large compared to 2.2 μ F. Then calculate

$$R_o = R_c + (R_s || R_{fm})$$
 where R_c takes its value from the assumptions in Step 2.
7. If $R_c > (R_o/5)$, then the ESR is large enough to make the DUT look resistive. Choose Rz[2:0] = 0, Rp[2:0] = 0. This ends the algorithm.
8. Calculate the unity gain frequency (F_{ug}), the ideal unity gain frequency of the force amplifier, from $F_{ug} = \text{gm}/2\pi C_{C0}$. Using the previously suggested values (gm[1:0] = 2 gives gm = 300 μ A/V and $C_{C0} = 100$ pF), F_{ug} calculates to 480 kHz.
9. Calculate F_p , the load pole frequency, using $F_p = 1/(2\pi R_o C_{C0})$.

10. Calculate F_z , the ESR zero frequency, using $F_z = 1/(2\pi R_c C_r)$.
11. If $F_p > F_{ug}$, the load pole is above the bandwidth of the AD5560. Ignore it with $R_z[2:0] = 0$, $R_p[2:0] = 0$. This ends the algorithm
12. If $R_c < (R_0/25)$, then the ESR is negligible. Attempt to cancel the load pole with R_z zero. Choose an ideal zero frequency of $2F_p$ for some safety margin and then choose the $R_z[2:0]$ value that gives the closest frequency on a logarithmic scale. This ends the algorithm
13. Otherwise, this is a troublesome window in which a load pole and a load zero can't be ignored. Use the following steps:
 - To cancel the load pole at F_p , choose an ideal zero frequency of $6F_p$ (this is more conservative than the $2F_p$ suggested earlier, but there is more that can go wrong with miscalculation). Then choose the $R_z[2:0]$ value that gives the closest zero to this ideal frequency of $6F_p$ on a logarithmic scale.
 - To cancel the ESR zero at F_z , choose an ideal pole frequency of $2F_z$.
 - Then choose the $R_p[2:0]$ value that gives the closest pole to this ideal frequency of $2F_z$ on a logarithmic scale. This ends the algorithm

ADJUSTING THE AUTOCOMPENSATION MODE

The autocompensation algorithm assumes that there is $1\ \Omega$ of resistance (R_c) from the AD5560 to the DUT. If a particular application has resistance that differs greatly from this, then it is likely that the autocompensation algorithm is nonoptimal.

If using the autocompensation algorithm as a starting point, consider that overstating the C_r capacitance and understating the ESR R_c is likely to give a faster response but could cause oscillations. Understating C_r and overstating R_c is more likely to slow things down and reduce phase margin but not create an oscillator.

It is often advisable to err on the side of simplicity. Rather than insert a pole and zero at similar frequencies, it may be better to add none at all. Set $R_p[2:0] = R_z[2:0] = 0$ to push them beyond the AD5560 bandwidth.

DEALING WITH PARALLEL LOAD CAPACITORS

In the event that the load capacitance consists of two parallel capacitors with different ESRs, it is highly likely that the overall complex impedance at the unity gain bandwidth is dominated by the larger capacitor and its ESR. Assuming that the smaller capacitor does not exist normally is a safer simplifying assumption. A more complex alternative is to calculate the overall impedance at the expected unity gain bandwidth and use this to calculate an equivalent series C_r and R_c that have the same complex impedance at that particular frequency.

DAC LEVELS

This device contains all the dedicated DAC levels necessary for operation: a 16-bit DAC for the force amplifier, two 16-bit DACs for the clamp high and low levels, two 16-bit DACs for the comparator high and low levels, a 16-bit DAC to set a programmable open sense voltage, and a 16-bit offset DAC to bias or offset a number of DACs on chip (FORCE, CLL, CLH, CPL, CPH).

FORCE AND COMPARATOR DACS

The architecture of the main force amplifier DAC consists of a 16-bit R-2R DAC, while the comparator DACs are resistor-string DACs followed by an output buffer amplifier. This resistor-string architecture guarantees DAC monotonicity. The 16-bit binary digital code loaded to the DAC register determines at what node on the string the voltage is tapped off before being fed to the output amplifier.

The comparator DAC is similarly arranged. The force and comparator DACs have a 25.62 V span including overrange to enable offset and gain errors to be calibrated out.

The transfer function for these 16-bit DACs is

$$V_{OUT} = 5.125 \times V_{REF} \times \left(\frac{DAC\ CODE}{2^{16}} \right) - 5.125 \times V_{REF} \times \left(\frac{OFFSET_DAC_CODE}{2^{16}} \right) + DUTGND$$

where $DAC\ CODE$ is X2 (see the Offset and Gain Registers section).

CLAMP DACS

The architecture of the clamp DAC consists of a 16-bit resistor-string DAC followed by an output buffer amplifier. This resistor-string architecture guarantees DAC monotonicity. The 16-bit binary digital code loaded to the DAC register determines at what node on the string the voltage is tapped off before being fed to the output amplifier.

The clamp DACs have a 25.62 V span including overrange to enable offset and gain errors to be calibrated out.

The transfer function for these 16-bit DACs is

$$V_{CLH}, V_{CLL} = 5.125 \times V_{REF} \times \left(\frac{DAC\ CODE}{2^{16}} \right) - 5.125 \times V_{REF} \times \left(\frac{OFFSET_DAC_CODE}{2^{16}} \right) + DUTGND$$

The transfer function for the clamp current value is

$$I_{CLL}, I_{CLH} = \frac{5.125 \times V_{REF} \times \left(\frac{DAC\ CODE - 32768}{2^{16}} \right)}{R_{SENSE} \times MI_AMP_GAIN}$$

where:

R_{SENSE} is the sense resistor.

MI_AMP_GAIN is the gain of the MI amp (either 10 or 20).

OSD DAC

The OSD DAC is a 16-bit DAC function, again a resistor string DAC guaranteeing monotonicity. The 16-bit binary digital code loaded to the DAC register determines at what node on the string the voltage is tapped off before being fed to the output amplifier. The OSD function is used to program the voltage difference needed between the force and sense lines before the alarm circuit flags an error. The OSD DAC has a range of 0.62 V to 5 V. The transfer function is as follows:

$$V_{OUT} = V_{REF} \times \left(\frac{DAC\ CODE}{2^{16}} \right) \quad (1)$$

The offset DAC does not affect the OSD DAC output range.

DUTGND DAC

Similarly, the DUTGND DAC (DGS) is a 16-bit DAC and uses a resistor string DAC to guarantee monotonicity. The 16-bit binary digital code loaded to the DAC register determines at what node on the string the voltage is tapped off before being fed to the output amplifier. This function is used to program the voltage difference needed between the DUTGND and AGND lines before the alarm circuit flags an error.

The DUTGND DAC has a range of 0 V to 5 V. The transfer function for this 16-bit DAC is shown in Equation 1.

The offset DAC does not affect the OSD DAC output range.

OFFSET DAC

In addition to the offset and gain trim, there is also a 16-bit offset DAC that offsets the output of each DAC on chip. Therefore, depending on headroom available, the input to the force amplifier can be arranged either symmetrically or asymmetrically about DUTGND but always within a voltage span of 25 V. Some extra gain is included to allow for system error correction using the m (gain) and c (offset) registers.

The usable voltage range is –22 V to +25 V. Full scale loaded to the offset DAC does not give a useful output voltage range because the output amplifiers are limited by available footroom.

Table 15 shows the effect of the offset DAC on other DACs in the device (clamp, comparator, and force DACs).

Table 15. Offset DAC Relationship with Other DACs, $V_{REF} = 5\ V$

Offset DAC Code	DAC Code ¹	DAC Output Voltage Range
0	0	0.00
0	32,768	12.81
0	65,535	25.62
...
32,768	0	–12.81
32,768	32,768	0.00
32,768	65,535	12.81
...
57,344	0	–22.42
57,344	32,768	–9.61
57,344	65,535	3.20
...
65,355	...	Footroom limitations

¹ DAC code shown for 16-bit force DAC.

OFFSET AND GAIN REGISTERS

Each DAC level contains independent offset and gain control registers that allow the user to digitally trim offset and gain. These registers give the user the ability to calibrate out errors in the complete signal chain (including the DAC) using the internal m and c registers, which hold the correction factors.

The digital input transfer function for the DACs can be represented as

$$x2 = [x1 \times (m + 1) / 2^n] + (c - 2^{n-1})$$

where:

$x2$ is the data-word loaded to the resistor string DAC.

$x1$ is the 16-bit data-word written to the DAC input register.

m is the code in the gain register (default code = $2^{16} - 1$).

n is the DAC resolution ($n = 16$).

c is the code in the offset register (default code = 2^{15}).

Offset and Gain Registers for the Force Amplifier DAC

The force amplifier input (F_{IN}) DAC level contains independent offset and gain control registers that allow the user to digitally trim offset and gain. There is one set of registers for the force voltage range: $x1$, m , and c .

Offset and Gain Registers for the Comparator DACs

The comparator DAC levels contain independent offset and gain control registers that allow the user to digitally trim offset and gain. There are seven sets of registers consisting of a combination of $x1$, m , and c , one set each for the five internal force current ranges and one set each for the two external high current ranges.

Offset and Gain Registers for the Clamp DACs

The clamp DAC levels contain independent offset and gain control registers that allow the user to digitally trim offset and gain. One set of registers covers the V_{SENSE} range, the five

internal force current ranges, and the two external high current ranges. Both clamp DAC x1 registers and their associated offset and gain registers are 16-bit.

REFERENCE SELECTION

The voltage applied to the VREF pin determines the output voltage range and span applied to the force amplifier, clamp, and comparator inputs and the current ranges.

This device can be used with a reference input ranging from 2 V to 5 V. However, for most applications, a reference input of 5 V is able to meet all voltage range requirements. The DAC amplifier gain is 5.125, which gives a DAC output span of 25.625 V. The DACs have gain and offset registers that can be used to calibrate out system errors. In addition, the gain register can be used to reduce the DAC output range to the desired force voltage range.

Using a 5 V reference and setting the m (gain) register to one-fourth scale or 0x4000 gives an output voltage span of 6.25 V. Because the force DAC has 18 bits of resolution even with only one-fourth of the output voltage span, it is still possible to achieve 16-bit resolution in this 6.25 V range.

The measure current amplifier has two gain settings, 10 and 20. The two gain settings allow users to achieve the quoted/specified current ranges with large or small voltage swings. The 20 gain is intended for use with a 5 V reference, and the 10 gain setting is for use with a 2.5 V reference. Both combinations ensure the specified current ranges. Other VREF/gain setting combinations should only be used to achieve smaller current ranges. See Table 27 for suggested references for use with the AD5560.

CHOOSING AV_{DD}/AV_{SS} POWER SUPPLY RAILS

As noted in the Specifications section, the minimum supply variation across the part is $|AV_{DD} - AV_{SS}| \geq 16$ V and ≤ 33 V, $AV_{DD} \geq 8$ V, $AV_{SS} \leq -5$ V. For the AD5560 circuits to operate correctly, the supply rails must take into account not only the force voltage range, but also the internal DAC minimum voltage level, as well as headroom/footroom.

The DAC amplifier gains VREF by 5.125, and the offset DAC centers that range about some chosen point. Because the DAC minimum voltage (V_{MIN}) is used in other parts of the circuit (MEASOUT gain of 0.2), it is important that AV_{SS} be chosen based on the following:

$$AV_{SS} \leq -5.125 \times (VREF \times (OFFSET_DAC_CODE/2^{16})) - AV_{SS_Headroom} - V_{DUTGND} - (R_{CABLE} \times I_{LOAD})$$

where:

$AV_{SS_Headroom}$ is the 2.75 V headroom (includes the R_{SENSE} voltage drop).

V_{DUTGND} is the voltage range anticipated at DUTGND.

R_{CABLE} is the cable/path resistance.

I_{LOAD} is the maximum load current.

When choosing AV_{DD} , remember to take into account the specified current ranges. The measure current block has either a gain of 20 or 10 and needs to have sufficient headroom/footroom to operate correctly.

As the nominal, V_{RSENSE} is ± 0.5 V for the full-scale specified current flowing for all ranges. If this is gained by 20, the measure current amplifier output (internal node) voltage range is ± 10 V with full-scale current and the default offset DAC setting. The measure current block needs ± 2.25 V footroom/ headroom for correct operation in addition to the ± 0.5 V V_{RSENSE} .

For simplicity, when $VREF = 5$ V, minimum $|AV_{DD} - AV_{SS}| = 31.125$ V ($V_{REF} \times 5.125 + \text{headroom} + \text{footroom}$); otherwise, there can be unanticipated effects resulting from headroom/footroom issues. This does not take into account cable loss or DUTGND contributions.

Similarly, when $VREF = 2.5$ V, minimum $|AV_{DD} - AV_{SS}| = 18.3$ V and, when $VREF = 2$ V, minimum $|AV_{DD} - AV_{SS}| = 16$ V.

The AD5560 is designed to settle fast into large capacitive loads, therefore, when slewing, the device draws $2\times$ to $3\times$ the current range from the AV_{DD}/AV_{SS} supplies. When choosing supply rails, they should be capable of supplying each DPS channel with sufficient current to slew.

CHOOSING $HCAV_{SSX}$ AND $HCAV_{DDX}$ SUPPLY RAILS

Selection of $HCAV_{SSX}$ and $HCAV_{DDX}$ supplies is determined by the EXTFORCE1 and EXTFORCE2 output ranges. The supply rails chosen must take into account headroom and footroom, DUTGND voltage range, cable loss, supply tolerance, V_{RSENSE} . If diodes are used in series with the $HCAV_{SSX}$ and $HCAV_{DDX}$ supplies pins (shown in Figure 57), the diode voltage drop should also be factored into the supply rail calculation.

The AD5560 is designed to settle fast into large capacitive loads in high current ranges; therefore, when slewing, the device draws $2\times$ to $3\times$ the current range from the $HCAV_{SSX}$ and $HCAV_{DDX}$ supplies. When choosing supply rails, ensure that they are capable of supplying each DPS channel with sufficient current to slew.

All output stages of the AD5560 are symmetrical; they can source and sink the rated current. Supply design/bypassing should account for this.

POWER DISSIPATION

The maximum power dissipation allowed in the EXTFORCE1 stage is 10 W, while in the EXTFORCE2 stage it is 5 W. Take care to ensure that the device is adequately cooled to remove the heat. The quiescent current is ~ 0.8 W with an internal current range enabled and ~ 1 W with external current ranges, EXTFORCE1 or EXTFORCE2, enabled. This device is specified for performance up to 90°C junction temperature (T_J).

PACKAGE COMPOSITION AND MAXIMUM VERTICAL FORCE

The exposed pad and leads of the TQFP package have a 100% tin finish. The exposed paddle is connected internally to AV_{SS} . The simulated maximum allowable force for a single lead is 0.18 lbs; total allowable force for the package is 11.5 lbs. The quoted maximum force may cause permanent lead bending. Other package failure (die, mould, board) may occur first at lower forces.

SLEW RATE CONTROL

There are two methods of achieving different slew rates using the AD5560. One method is using the programmable slew rate feature that gives eight programmable rates. The second method is using the ramp feature and an external clock.

PROGRAMMABLE SLEW RATE

Eight programmable modes of slew rates are available to choose from through the serial interface, enabling the user to choose different rates to power up the DUT. The different slew rates are achieved by variation in the internal compensation of the force DAC output amplifier. The slew rates available are 1.000 V/ μ s, 0.875 V/ μ s, 0.750 V/ μ s, 0.625 V/ μ s, 0.5 V/ μ s, 0.4375 V/ μ s, 0.35V μ s, and 0.313 V/ μ s.

RAMP FUNCTION

Included in the AD5560 is a ramp function that enables the user to apply a rising or falling voltage ramp to the DUT. The user supplies a clock, RCLK, to control the timing.

This function is controlled via the serial interface and requires programming of a number of registers to determine the end value, the ramp size, and the clock divider register to determine the update rate.

The contents of the FIN DAC x1 register are the ramp start value. The user must load the end code register and the step size register. The sign is now generated from the difference between the FIN DAC x1 register and the end code; then the step size value is added to or subtracted from FIN DAC x1,

calibrated and stored. The user must supply a clock to the RCLK pin to load the new code to the DAC. The output settles in 1.2 μ s for

a step of 10 mV with C_{DUT} in the lowest range of <0.2 μ F.

While the output is settling, the next step is calculated to be ready for the next ramp clock. The calibration engine is being used here, so there is calibration delay of 1.2 μ s.

The ramp timing is controlled in two ways, by a user-supplied clock (RCLK) and by a clock divider register; this gives the user much flexibility over the frequency of the ramp steps. The ramp typically starts after ($2 \times$ clock divider + 2) clocks, although there can be a ± 1 clock delay due to the asynchronous nature of RCLK. The external clock can be a maximum of 833 kHz when using clock divider = 1. Faster RCLK speeds can be used, but the fastest ramp rate is linked into the DAC calibration engine.

For slower ramp rates, an even slower RCLK can be used.

The step sizes are in multiples of 16 LSBs. If the code previous to the end code is not a multiple of this step size, the last step is smaller. If the ramp function needs to be interrupted at any stage during the ramp, write the interrupt ramp command. The FIN DAC x1 stops ramping at the current value and returns to normal operation.

The fastest ramp rate is 0.775 V/ μ s (for 5 V reference and 833 kHz clock, using 2032 LSB step size and divider = 1).

The slowest ramp rate is 24 μ V/ μ s (for 5 V reference and 833 kHz clock using 16 LSB step size and divider = 255). Even slower ramps can be achieved with slower SCLK. The ramp continues until any of the following occur:

- It reaches the end code.
- An interrupt ramp is received from the user.
- If any enabled alarm triggers, the ramp stops to allow the user to service the activated alarm.

While the device is in ramp mode, the only command that the interface accepts is an interrupt ramp. No other commands should be written to the device while ramping because they are ignored.

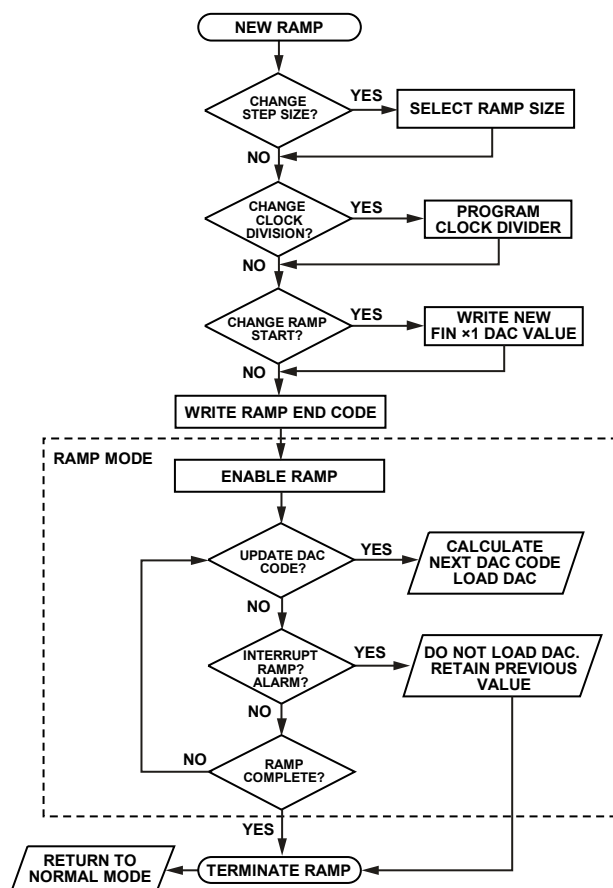


Figure 56. Flow Chart for Ramp Function

07778-011

SERIAL INTERFACE

The AD5560 contains an SPI-compatible interface operating at clock frequencies up to 50 MHz. To minimize both the power consumption of the device and on-chip digital noise, the interface powers up fully only when the device is being written to, that is, on the falling edge of $\overline{\text{SYNC}}$.

SPI INTERFACE

The serial interface is 2.5 V LVTTTL-compatible when operating from a 2.3 V to 3.6 V DV_{CC} supply. It is controlled by four pins; they are as follows:

- $\overline{\text{SYNC}}$ (frame synchronization input)
- SDI (serial data input pin)
- SCLK (clocks data in and out of the device)
- SDO (serial data output pin for data readback)

SPI WRITE MODE

The AD5560 allows writing of data via the serial interface to every register directly accessible to the serial interface, which is all registers except the DAC registers.

The serial word is 24 bits long. The serial interface works with both a continuous and a burst (gated) serial clock. Serial data applied to SDI is clocked into the AD5560 by clock pulses applied to SCLK. The first falling edge of $\overline{\text{SYNC}}$ starts the write cycle. At least 24 falling clock edges must be applied to SCLK to clock in 24 bits of data before $\overline{\text{SYNC}}$ is taken high again.

The input register addressed is updated on the rising edge of $\overline{\text{SYNC}}$. For another serial transfer to take place, $\overline{\text{SYNC}}$ must be taken low again.

SDO OUTPUT

The SDO output in the AD5560 is a weak/slow output driver. If using readback or the daisy-chain function, the frequency of SCLK must be reduced so that SDO can operate properly. The SCLK frequency is dependent on the DV_{CC} supply voltage used; see Table 2 for details and the following example:

Maximum SCLK = 12 MHz, then $\text{DV}_{\text{CC}} = 2.3 \text{ V}$ to 2.7 V

Maximum SCLK = 15 MHz, then $\text{DV}_{\text{CC}} = 2.7 \text{ V}$ to 3.3 V

Maximum SCLK = 20 MHz, then $\text{DV}_{\text{CC}} = 4.5 \text{ V}$ to 5.5 V

RESET FUNCTION

$\overline{\text{RESET}}$ is a level-sensitive input. Bringing the $\overline{\text{RESET}}$ line low resets the contents of all internal registers to their power-on reset state. The falling edge of $\overline{\text{RESET}}$ initiates the reset process; $\overline{\text{BUSY}}$ goes low for the duration, returning high when the $\overline{\text{RESET}}$ process is complete. This sequence takes 300 μs maximum. Do not write to the serial interface while $\overline{\text{BUSY}}$ is low handling a $\overline{\text{RESET}}$ command. When $\overline{\text{BUSY}}$ returns high, normal operation resumes and the status of the $\overline{\text{RESET}}$ pin is ignored until it goes low again.

BUSY FUNCTION

$\overline{\text{BUSY}}$ is a digital open-drain output that indicates the status of the AD5560. All writes drive the $\overline{\text{BUSY}}$ output low for some period of time, however events that use the calibration engine, such as all DAC x1 writes, drive it lower for a longer period of time while the calculations are completed.

For the DACs, the value of the internal data (x2) loaded to the DAC data register is calculated each time the user writes new data to the corresponding x1 register. During the calculation of x2, the $\overline{\text{BUSY}}$ output goes low and x2 writes are pipelined; therefore, x2 writes can still be presented to the device while $\overline{\text{BUSY}}$ is still low (see the Register Update Rates section). The DAC outputs update immediately after $\overline{\text{BUSY}}$ goes high.

Writes to other registers need to be handled differently and should either watch the $\overline{\text{BUSY}}$ pin or be timed. While $\overline{\text{BUSY}}$ is low, the user can continue writing new data to any control register, m register, or c register but should not complete the writing process ($\overline{\text{SYNC}}$ returning high) until the $\overline{\text{BUSY}}$ signal has returned high.

$\overline{\text{BUSY}}$ also goes low during power-on reset as well as when low level is detected on the $\overline{\text{RESET}}$ pin.

$\overline{\text{BUSY}}$ writes to the system control register, compensation register, alarm register, and diagnostic register; m or c registers do not involve the calibration engine, thus speeding up writing to the device.

LOAD FUNCTION

The AD5560 device contains a function with which updates to multiple devices can be synchronized using the $\overline{\text{LOAD}}$ function. There is not a dedicated pin available for this function; however, either the CLEN or $\overline{\text{HW_INH}}$ pin can be used as a $\overline{\text{LOAD}}$ input (selection is made in the system control register, Address 0x1 Bits[8:7]).

When selected as the $\overline{\text{LOAD}}$ function, the pin no longer operates in its previous function (power-on default for each of these pins is a CLEN or $\overline{\text{HW_INH}}$ function).

The $\overline{\text{LOAD}}$ function controls the following registers:

- 0x8 FIN DAC x2 register
- 0xD CLL DAC x2 register
- 0x10 CLH DAC x2 register
- 0x4 Compensation Register 1
- 0x5 Compensation Register 2
- 0x2 DPS Register 1 (only current ranges, Bits [B13: B11])

There is, however, an alternate method for updating and using the CLEN and $\overline{\text{HW_INH}}$ pins in their normal function.

If Bits[8:7] of the system control register (Address 0x1) are high, then the $\overline{\text{CLEN}}$ and $\overline{\text{HW_INH}}$ operate as normal, and the update waits until $\overline{\text{BUSY}}$ goes high (this way multiple channels can still be synchronized by simply tying $\overline{\text{BUSY}}$ pins together).

REGISTER UPDATE RATES

As mentioned previously, the value of the x2 register is calculated each time the user writes new data to the

corresponding x1 register. The calculation is performed by a three stage process. The first two stages take 600 ns each and the third stage takes 300 ns. When the write to one of the x1 registers is complete the calculation process begins, the user is free to write to another register provided that the write operation does not finish until the first stage calculation is complete, that is, 600 ns after the completion of the first write operation.

CONTROL REGISTERS

DPS AND DAC ADDRESSING

The serial word assignment consists of 24 bits as shown in Table 16. All write to registers can be read back. There are some read-only registers (Address 0x43 and Address 0x44). DAC x2

registers are not available for readback. A no operation (NOP) command performs no function within the device. This code may be useful when performing a readback function where a change of DAC or DPS register is not required.

Table 16. Serial Word Assignment

B23	[B22:B16]	[B15:B0]
R/W	Address bits	Data bits

Table 17. Read or Write Register Addressing

Address	Register	Default	Data Bits, MSB First		
0x0	NOP	0x0000	NOP command; performs no operation.		
0x1	System control register	0x0000	Bit	Name	Function
			15	TMP[1:0]	Thermal shutdown bits. TMP1, TMP0 allow the user to program the thermal shutdown temperature of operation.
			14		
				TMP	Action
				0	Shutdown at a T _J of 130°C (power-on default)
				1	Shutdown at a T _J of 120°C
				2	Shutdown at a T _J of 110°C
				3	Shutdown at a T _J of 100°C
			13	GAIN[1:0]	MEASOUT output range. The MEASOUT range defaults to the voltage force span for voltage and current measurements, this is ±12.81 V, which includes some overrange to allow for error correction. The MEASOUT range can be reduced by using the GAIN bits. This allows for use of asymmetrical supplies or for use of a smaller input range ADC. MEASOUT gain settings do not translate the low voltage temperature sensor signal (TSENSE).
			12		
				Gain	MEASOUT Gain
				0	1
				1	1
				2	0.2
				3	0.2
				To allow for system error correction, there is an additional gain of 0.125 for the force function if this error correction is used as intended; then the output range on MEASOUT scales accordingly (see Table 9).	
			11	FINGND	Writing a 1 to FINGND switches the positive input of the force amplifier to GND; when 0, the input of the force amplifier is connected to the output of the force DAC.
			10	CPO	Write a 1 to the CPO bit to enable a simple window comparator function. In this mode, only one comparator output is available (CPOH/CPO). This provides two bits of information. The compared value is either inside or outside the window and enables the user to bring only one line back to the controller per DPS device.
			9	PD	This bit powers down the force amplifier block. Note that the amplifier must be powered up but inhibited ($\overline{SW_INH}$ or $\overline{HW_INH}$), to meet leakage specifications. A 0 powers this block down (default).
			8	LOAD	Updates to registers listed in the following LOAD Function column do not occur until the active LOAD pin is brought low (or in the case of LOAD 3, until BUSY goes high).
			7		
				LOAD	LOAD Function
				0	Default operation, CLEN and $\overline{HW_INH}$ function normally.
				1	The CLEN pin is a \overline{LOAD} input.
				2	The $\overline{HW_INH}$ pin is a \overline{LOAD} input.
				3	The device senses the \overline{BUSY} open-drain pin, and doesn't update until that goes high. No \overline{LOAD} hardware pin. CLEN and $\overline{HW_INH}$ function normally.
			6:0	Unused	Set to 0.

Table 18. DPS Register 1

Address	Default	Data Bits, MSB First			
0x2	0x0000	Bit	Name	Function	
		15	SW-INH	This bit enables the force amplifier when high and disables the amplifier when low. This bit is OR'd with the HW_INH hardware inhibit pin.	
		14	Reserved	Reserved, set to 0.	
		13	I[2:0]	Current range addressing.	
		12		These bits allow selection of the required current range.	
		11			
				I	Action
				0	±5 µA current range
				1	±25 µA current range
				2	±250 µA current range
				3	±2.5 mA current range
				4	±25 mA current range
			5	External Range 2	
			6	External Range 1	
			7	Reserved	
		10	CMP[1:0]	Comparator Function. CMP1 acts as a comparator output enable, while CMP0 selects between a comparing DUT current or voltage; by default, the comparators are high-Z on power-on.	
		9			
				CMP	Action
				0	Comparator outputs high-Z
				1	Comparator outputs high-Z
			2	Compare DUT current	
			3	Compare DUT voltage	
		8	ME[3:0]	Bits ME[3:0] allow selection of the required measure mode, allowing the MEASOUT line to be disabled; connect to the temperature sensor or enable for measurement. ME3 is MEASOUT enable/disable; when high, MEASOUT is enabled, and ME[2:0] can be used to preselect the measuring parameter. Where a number of MEASOUT lines are connected together and passed to a common ADC, this function can allow for much faster measurement time between channels because the slew time of the measurement buffer is reduced. For details on diagnostic functions, see Address 0x7, the diagnostic register.	
		7			
		6			
		5			
				ME[2:0]	Action
				0	MEASOUT high-Z
				1	Connect MEASOUT to I _{SENSE}
				2	Connect MEASOUT to V _{SENSE}
				3	Connect MEASOUT to K _{SENSE}
			4	Connect MEASOUT to TSENSE	
			5	Connect MEASOUT to DUTGND SENSE	
			6	Connect MEASOUT to diagnostic functions: DIAG A (see Address 0x7)	
			7	Connect MEASOUT to diagnostic functions: DIAG B (see Address 0x7)	
		4	CLEN	Clamp enable; set high to enable the clamp; set low to disable the clamp. This bit is OR'd with the hardware CLEN pin.	
		3:0	Unused	Set to 0.	

Table 19. DPS Register 2

Address	Default	Data Bits, MSB First						
0x3	0x0000	Bit 15	Name SF0	Function				
				System force and sense line addressing, SF0. Bit SF0 addresses each of the different combinations of switching the system force and sense lines to the force and sense pins at the DUT.				
				Guard High-Z (Bit 7)	SFO	SYS_SENSE Pin	SYS_FORCE Pin	GUARD/SYS_DUTGND Pin
				0	0	Open	Open	Guard
				0	1	Sense	Force	Guard
				1	0	Open	Open	Open
				1	1	Sense	Force	DUTGND
		14 13 12	SR[2:0]	Slew rate control, SR2, SR1, SR0. Selects the slew rate for the main DAC output amp.				
				SR	Action			
				0	1 V/μs			
				1	0.875 V/μs			
				2	0.75 V/μs			
				3	0.62 V/μs			
				4	0.5 V/μs			
				5	0.43 V/μs			
				6	0.35 V/μs			
				7	0.3125 V/μs			
		11	GPO	General purpose output bit. The GPO bit can be used for any function such as disconnecting the decoupling capacitor to help speed up low current testing.				
		10 9	SLAVE, GANGIMODE	Ganging multiple devices increases the current drive available. Use these bits to enable selection of the ganging mode and place the device in slave or master mode. In default operation, each device is a master (gang of one). Figure 52 shows how the device is configured in this mode.				
				SLAVE	Action			
				0	Master: MASTER_OUT = internally connects to active EXTFORCE1/ EXTFORCE2 output			
				1	Master: MASTER_OUT = master MI			
				2	SLAVE FV to EXTFORCE1/EXTFORCE2 connected internally to close the FVAMP loop			
				3	SLAVE FI			
		8	INT10K	Setting this bit high allows the user to connect an internal sense short resistor of 10 kΩ between the force and the sense lines (closes SW 11). This resistor is actually made up of a series 4 kΩ resistors followed by a 2 kΩ switch and another 4 kΩ resistor. There is a 10 kΩ resistor that can be connected between the FORCE and SENSE pins by use of SW11. This 10 kΩ resistor is intended to maintain a force/sense connection when a DUT is not in place. It is not intended to be connected when measurements are being made because this defeats the purpose of the OSD circuit in identifying an open circuit between FORCE and SENSE. In addition, the sense path has a 2.5 kΩ resistor in series; therefore, if the 10 kΩ switch is closed, errors may become apparent when in high current ranges.				
		7	Guard High-Z	Set this bit high to high-Z the guard amplifier. This is required if using the GUARD/ SYS_DUTGND pin the in SYS_DUTGND function.				
		6:0	Unused	Set to 0.				

The AD5560 has been designed with three different compensation modes. The power-on default mode is **SAFEMODE** enabled. This ensures that the device is stable into any load. Use Compensation Register 1 to configure the device for autocompensation, where the user inputs the CDUT and ESR bits, and the AD5560 chooses the most appropriate compensation scheme for these load conditions.

Table 20. Compensation Register 1

Address	Default	Data Bits, MSB First		
0x4	0x0000	Bit	Name	Function
		15	CDUT[3:0]	Use these control bits to tell the device how much capacitive load there is, so the device can optimize the compensation used. Do not overestimate CDUT because this can cause oscillations. Underestimating CDUT gives suboptimal but stable performance.
		14		
		13		
		12		
				CDUT
				CDUT Min
				CDUT Max
				0
				1
				2
				3
				4
				5
				6
				7
				8
				9
				10
				11
				12
				13
				14
				15
		11	ESR[3:0]	Use these control bits to tell the device how much ESR there is in series with CDUT so that the device can optimize the compensation used. Do not underestimate ESR present because this can cause oscillations. Overestimating ESR gives suboptimal but stable performance.
		10		
		9		
		8		
				ESR
				ESR Min
				ESR Max
				0
				1
				2
				3
				4
				5
				6
				7
				8
				9
				10
				11
				12
				13
				14
				15
		7	SAFEMODE	SAFEMODE = 0 overrides values in Compensation Register 1 to make the force amplifier stable under most load conditions. This mode is useful if it is unknown what the DPS is driving, but it does result in an extremely slow response. The default operation on power-on or reset is SAFEMODE. SAFEMODE settings are always gm[1:0] = 2, Rp[2:0] = 0, Rz[2:0] = 0, Cc[3:1] = 111, Cr[2:0] = 5, and Cc[0] = 1. Set this bit high to enable autocompensation.
		6:0	Reserved	Set to 0.

Table 21. Compensation Register 2

Address	Default	Data Bits, MSB First																																
0x5	0x0110	Bit	Name	Function																														
		15	Manual compensation	The AD5560 can be manually configured to compensate the force amplifier into a wide range of load conditions. When this bit is high, manual compensation mode is active and it overrides the settings of Compensation Register 1. Readback when in manual compensation mode returns the compensation settings loaded to the force amplifier and loaded to this register. Similarly, when in autocompensation mode, readback of this register address returns the compensation settings of the force amplifier. However, readback of this register address when in safe mode does not reflect SAFEMODE settings. SAFEMODE settings are gm[1:0] = 2, Rp[2:0] = 0, Rz[2:0] = 0, Cc[3:1] = 111, CF[2:0] = 5, and Cc[0] = 1.																														
		14 13 12	Rz[2:0]	<table><tr><td colspan="3">Set the value of Rz to add a zero at the following frequencies. This calculation assumes that C_{C0} = 100 pF.</td></tr><tr><th>Rz</th><th>Rz (Ω)</th><th>Fzero (Hz)</th></tr><tr><td>0¹</td><td>500</td><td>3.2 M</td></tr><tr><td>1</td><td>1.6 k</td><td>1 M</td></tr><tr><td>2</td><td>5 k</td><td>320 k</td></tr><tr><td>3</td><td>16 k</td><td>100 k</td></tr><tr><td>4</td><td>50 k</td><td>32 k</td></tr><tr><td>5</td><td>160 k</td><td>10 k</td></tr><tr><td>6</td><td>500 k</td><td>3.2 k</td></tr><tr><td>7</td><td>1.6 M</td><td>1 k</td></tr></table>	Set the value of Rz to add a zero at the following frequencies. This calculation assumes that C _{C0} = 100 pF.			Rz	Rz (Ω)	Fzero (Hz)	0 ¹	500	3.2 M	1	1.6 k	1 M	2	5 k	320 k	3	16 k	100 k	4	50 k	32 k	5	160 k	10 k	6	500 k	3.2 k	7	1.6 M	1 k
Set the value of Rz to add a zero at the following frequencies. This calculation assumes that C _{C0} = 100 pF.																																		
Rz	Rz (Ω)	Fzero (Hz)																																
0 ¹	500	3.2 M																																
1	1.6 k	1 M																																
2	5 k	320 k																																
3	16 k	100 k																																
4	50 k	32 k																																
5	160 k	10 k																																
6	500 k	3.2 k																																
7	1.6 M	1 k																																
		11 10 9	Rp[2:0]	<table><tr><td colspan="3">Set the value of Rp to add an additional pole. There is an internal 8 pF capacitor to provide an RC filter, creating a pole at one of the following frequencies.</td></tr><tr><th>Rp[2:0]</th><th>Rp (Ω)</th><th>Fpole (Hz)</th></tr><tr><td>0¹</td><td>200</td><td>100 M</td></tr><tr><td>1</td><td>675</td><td>29 M</td></tr><tr><td>2</td><td>2280</td><td>8.7 M</td></tr><tr><td>3</td><td>7700</td><td>2.6 M</td></tr><tr><td>4</td><td>26 k</td><td>760 k</td></tr><tr><td>5</td><td>88 k</td><td>220 k</td></tr><tr><td>6</td><td>296 k</td><td>67 k</td></tr><tr><td>7</td><td>1 M</td><td>20 k</td></tr></table>	Set the value of Rp to add an additional pole. There is an internal 8 pF capacitor to provide an RC filter, creating a pole at one of the following frequencies.			Rp[2:0]	Rp (Ω)	Fpole (Hz)	0 ¹	200	100 M	1	675	29 M	2	2280	8.7 M	3	7700	2.6 M	4	26 k	760 k	5	88 k	220 k	6	296 k	67 k	7	1 M	20 k
Set the value of Rp to add an additional pole. There is an internal 8 pF capacitor to provide an RC filter, creating a pole at one of the following frequencies.																																		
Rp[2:0]	Rp (Ω)	Fpole (Hz)																																
0 ¹	200	100 M																																
1	675	29 M																																
2	2280	8.7 M																																
3	7700	2.6 M																																
4	26 k	760 k																																
5	88 k	220 k																																
6	296 k	67 k																																
7	1 M	20 k																																
		8 7	gm[1:0]	<table><tr><td colspan="3">Set the transconductance of the force amplifiers input stage. The gain bandwidth (GBW) of the force voltage loop is equal to gm/C_{C0}. The following values assume C_{C0} = 100 pF.</td></tr><tr><th>gm</th><th>gm (μA/V)</th><th>GBW (Hz)</th></tr><tr><td>0</td><td>40</td><td>64 k</td></tr><tr><td>1</td><td>80</td><td>130 k</td></tr><tr><td>2¹</td><td>300</td><td>480 k (default)</td></tr><tr><td>3</td><td>900</td><td>1.3 M</td></tr></table>	Set the transconductance of the force amplifiers input stage. The gain bandwidth (GBW) of the force voltage loop is equal to gm/C _{C0} . The following values assume C _{C0} = 100 pF.			gm	gm (μA/V)	GBW (Hz)	0	40	64 k	1	80	130 k	2 ¹	300	480 k (default)	3	900	1.3 M												
Set the transconductance of the force amplifiers input stage. The gain bandwidth (GBW) of the force voltage loop is equal to gm/C _{C0} . The following values assume C _{C0} = 100 pF.																																		
gm	gm (μA/V)	GBW (Hz)																																
0	40	64 k																																
1	80	130 k																																
2 ¹	300	480 k (default)																																
3	900	1.3 M																																
		6 5 4	CF[2:0]	<table><tr><td colspan="2">These bits determine which feedforward capacitor C_{Fx} is switched in.</td></tr><tr><th>CF</th><th>Action</th></tr><tr><td>0</td><td>None</td></tr><tr><td>1</td><td>C_{F0}</td></tr><tr><td>2</td><td>C_{F1}</td></tr><tr><td>3</td><td>C_{F2}</td></tr><tr><td>4</td><td>C_{F3}</td></tr><tr><td>5¹</td><td>C_{F4}</td></tr><tr><td>6</td><td>None</td></tr><tr><td>7</td><td>None</td></tr></table>	These bits determine which feedforward capacitor C _{Fx} is switched in.		CF	Action	0	None	1	C _{F0}	2	C _{F1}	3	C _{F2}	4	C _{F3}	5 ¹	C _{F4}	6	None	7	None										
These bits determine which feedforward capacitor C _{Fx} is switched in.																																		
CF	Action																																	
0	None																																	
1	C _{F0}																																	
2	C _{F1}																																	
3	C _{F2}																																	
4	C _{F3}																																	
5 ¹	C _{F4}																																	
6	None																																	
7	None																																	
		3	Cc3	Connect Cc3 in series with 100 kΩ ¹																														
		2	Cc2	Connect Cc2 in series with 25 kΩ ¹																														
		1	Cc1	Connect Cc1 in series with 6 kΩ ¹																														
		0	Reserved	0																														

¹ This item corresponds to a SAFEMODE setting (SAFEMODE is the power-on default setting).

Register 0x6 allows the user to enable or disable any of the alarm flags that are not required. If disabled, that particular alarm no longer flags on the appropriate open-drain pin; however, the alarm status is still available in both of the alarm status registers (Address 0x43 and Address 0x44).

Table 22. Alarm Setup Register

Address	Default	Data Bits, MSB First		
0x6	0x0000	Bit	Name	Function
		15	Latched TMPALM	Set this latched bit high to program the open-drain TMPALM alarm pin as a latched output; leave low for an unlatched alarm pin (default).
		14	Disable TMPALM	Set this bit high to disable the open-drain TMPALM alarm pin; leave low to leave enabled (default).
		13	Latched OSALM	Set this latched bit high to program the OSALM as a latched alarm on the open-drain KELALM pin; leave low for an unlatched alarm pin (default).
		12	Disable OSALM	Set this bit high to disable the OSALM alarm function flagging the open-drain KELALM pin; leave low to remain enabled (default). The GRDALM, DUTALM, and OSALM alarm functions share one open-drain KELALM alarm pin. These bits allow users to choose if they wish to have all or selected information flagged to the alarm pin.
		11	Latched DUTALM	Set this latched bit high to program the DUTALM as a latched alarm on the open-drain KELALM pin; leave low for unlatched alarm pin (default).
		10	Disable DUTALM	Set this bit high to disable the DUTALM alarm function flagging the open-drain KELALM pin. Leave low to leave enabled (default). The GRDALM, DUTALM, and OSALM alarm function share one open drain KELALM alarm pin. These bits allow user to choose if they only wish to have all or either information flagged to the alarm pin. The DUTGND pin has a 50 μ A pullup to allow for detection of an error in the DUTGND path. Setting this bit high also disables the 50 μ A pull-up.
		9	Latched CLALM	Set this latched bit high to program the open-drain CLALM clamp alarm pin as a latched output; leave low for an unlatched alarm pin (default).
		8	Disable CLALM	Set this bit high to disable the open drain CLALM alarm pin; leave low to leave enabled (default).
		7	Latched GRDALM	Set this latched bit high to program the GRDALM as a latched alarm on the open-drain KELALM pin. Leave low for an unlatched alarm pin (default).
		6	Disable GRDALM	Set this bit high to disable the GRDALM alarm function flagging the open-drain KELALM pin; leave low to leave enabled (default). The GRDALM, DUTALM and OSALM alarm function share one open-drain KELALM alarm pin. These bits allow users to choose if they only wish to have all or either information flagged to the KELALM alarm pin.
		5:0	Unused	Set to 0.

Table 23. Diagnostic Register

Address	Default	Data Bits, MSB First					
0x7	0x0000	Bit	Name	Function			
		15	DIAG select[3:0]	DIAG select selects the set of diagnostic signals that can be made available on MEASOUT. First, use MEASOUT addressing (DPS Register 1) to select either the DIAG A or the DIAG B node to be made available on MEASOUT.			
		14					
		13					
		12					
		DIAG Select		Selected Measure Block	DIAG A	DIAG B	
		0:3		Disabled	Disabled	Disabled	
		4		Force amplifier	Disabled	Disabled	
		5			EXTFORCE1A	EXTFORCE2A	
		6			FINP	FINM	
		7			Output 2.5 mA	Output 25 mA	
		8		Measure block	VPTAT low	VPTAT high	
		9			VTSD low (ref V for 130°C)	VTSD high (Ref V for 0K (–273°C))	
		10			MI	VMID Code	
		11			MV	VMIN Code	
		12		DAC block	FORCE DAC	VOS DAC	
		13			CLL DAC	CLH DAC	
		14			CPL DAC	CPH DAC	
		15			OSD DAC	DGS DAC	
		VPTAT low/VPTAT high are temperature sensor devices in the middle of the enabled power stage, which gives a voltage level that can be mapped back to the VTSD low and VTSD high reference points to get a temperature value. These sensors are used in the thermal shutdown feature. See the Die Temperature Sensor and Thermal Shutdown section.					
		VMID code is the midscale voltage of the DACs; the offset DAC has a direct effect on this voltage level.					
		VMIN code is the zero-scale voltage of the DACs; again the offset DAC has a direct effect.					
		11	TSENSE select[3:0]	The following codes allow selection of one of three sets of eight thermal diodes. The D+ of the selected thermal diode is available on the GPO pin, the D– is on the AGND.			
		10		These thermal diodes are located across the die, in the cool parts and in the power stages. Diodes [16:23] are located in the force amplifier NPNs (power output devices for supplying current). Similarly, Diodes [24:31] are located in the force amplifier PNP devices (output devices for sinking current).			
		9					
		8					
7							
TSENSE Select		Selected Thermal Block		Connected Sensor			
0:7		N/A—normal GPO operation		No sensor connected			
8		Cool block		Cool end of high current drivers, hot side of digital block			
9				25 mA output stage			
10				Hottest part of sensitive measurement circuitry and cool part of force amplifier			
11				Coolest end of force amplifier block			
12				Coolest end of DACs			
13				Beside TSENSE available on MEASOUT			
14				Hottest part of DACs			
15			Cool side of digital block				
16		Force amplifier PNP	1A-1				
17			1A-2				
18			2A (similar location to VPTAT low for EXTFORCE2 range)				
19			1B-1 (similar location to VPTAT low for EXTFORCE1 range)				
20			1B-2				
21			2B				
22			1C-1				
23			1C-2				

Address	Default	Data Bits, MSB First					
0x7	0x0000	Bit	Name	Function			
				24	Force amplifier NPNs	1A-1	
				25		1A-2	
				26		2A (similar location to VPTAT high for EXTFORCE2 range)	
				27		1B-1 (similar location to VPTAT high for EXTFORCE1 range)	
				28		1B-2	
				29		2B	
				30		1C-1	
				31		1C-2	
		6 5	Test Force AMP[1:0]	These register bits allow disabling of stages of the force amplifier. This can be used to ensure connectivity in each parallel stage. The enabled stage depends also on which current range is selected.			
				Current Range		Test Force Amplifier	Enabled Stage
				EXTFORCE1		0	All stages
				EXTFORCE1		1	EXTFORCE1C
				EXTFORCE1		2	EXTFORCE1B
				EXTFORCE1		3	EXTFORCE1A
				EXTFORCE2		0	All stages
				EXTFORCE2		1	Reserved
				EXTFORCE2		2	EXTFORCE2B
				EXTFORCE2		3	EXTFORCE2A
4:0	Reserved	Set to 0.					

Table 24. Other Registers

Address	Register	Default	Data Bits, MSB First
0x8	FIN DAC x1	0x8000	x1 DAC register, D15 to D0, MSB first.
0x9	FIN DAC m	0xFFFF	m register, D15 to D0, MSB first.
0xA	FIN DAC c	0x8000	c register, D15 to D0, MSB first.
0xB	Offset DAC x	0x8000	D15 to D0.
0xC	OSD DAC x	0x1FFF	D15 to D0.
0xD	CLL DAC x1	0x0000	D15 to D0, the low clamp level can only be negative; the MSB is always 0 to ensure this.
0xE	CLL DAC m	0xFFFF	D15 to D0.
0xF	CLL DAC c	0x8000	D15 to D0.
0x10	CLH DAC x1	0xFFFF	D15 to D0, the high clamp level can only be positive; the MSB is always 1 to ensure this.
0x11	CLH DAC m	0xFFFF	D15 to D0.
0x12	CLH DAC c	0x8000	D15 to D0.
0x13	CPL DAC x1 5 μ A range	0x0000	D15 to D0.
0x14	CPL DAC m 5 μ A range	0xFFFF	D15 to D0.
0x15	CPL DAC c 5 μ A range	0x8000	D15 to D0.
0x16	CPL DAC x1 25 μ A range	0x0000	D15 to D0.
0x17	CPL DAC m 25 μ A range	0xFFFF	D15 to D0.
0x18	CPL DAC c 25 μ A range	0x8000	D15 to D0.
0x19	CPL DAC x1 250 μ A range	0x0000	D15 to D0.
0x1A	CPL DAC m 250 μ A range	0xFFFF	D15 to D0.
0x1B	CPL DAC c 250 μ A range	0x8000	D15 to D0.
0x1C	CPL DAC x1 2.5 mA range	0x0000	D15 to D0.
0x1D	CPL DAC m 2.5 mA range	0xFFFF	D15 to D0.
0x1E	CPL DAC c 2.5 mA range	0x8000	D15 to D0.
0x1F	CPL DAC x1 25 mA range	0x0000	D15 to D0.
0x20	CPL DAC m 25 mA range	0xFFFF	D15 to D0.
0x21	CPL DAC c 25 mA range	0x8000	D15 to D0.
0x22	CPL DAC x1 EXT range 2	0x0000	D15 to D0.
0x23	CPL DAC m EXT range 2	0xFFFF	D15 to D0.
0x24	CPL DAC c EXT range 2	0x8000	D15 to D0.
0x25	CPL DAC x1 EXT range 1	0x0000	D15 to D0.
0x26	CPL DAC m EXT range 1	0xFFFF	D15 to D0.
0x27	CPL DAC c EXT range 1	0x8000	D15 to D0.
0x28	CPH DAC x 1 5 μ A range	0xFFFF	D15 to D0.
0x29	CPH DAC m 5 μ A range	0xFFFF	D15 to D0.
0x2A	CPH DAC c 5 μ A range	0x8000	D15 to D0.
0x2B	CPH DAC x1 25 μ A range	0xFFFF	D15 to D0.
0x2C	CPH DAC m 25 mA range	0xFFFF	D15 to D0.
0x2D	CPH DAC c 25 μ A range	0x8000	D15 to D0.
0x2E	CPH DAC x1 250 μ A range	0xFFFF	D15 to D0.
0x2F	CPH DAC m 250 μ A range	0xFFFF	D15 to D0.
0x30	CPH DAC c 250 μ A range	0x8000	D15 to D0.
0x31	CPH DAC x1 2.5 mA range	0x0000	D15 to D0.
0x32	CPH DAC m 2.5 mA range	0xFFFF	D15 to D0.
0x33	CPH DAC c 2.5 mA range	0x8000	D15 to D0.
0x34	CPH DAC x1 25 mA range	0xFFFF	D15 to D0.
0x35	CPH DAC m 25 mA range	0xFFFF	D15 to D0.
0x36	CPH DAC c 25 mA range	0x8000	D15 to D0.
0x37	CPH DAC x1 EXT range 2	0xFFFF	D15 to D0.
0x38	CPH DAC m EXT range 2	0xFFFF	D15 to D0.
0x39	CPH DAC c EXT range 2	0x8000	D15 to D0.
0x3A	CPH DAC x1 EXT range 1	0xFFFF	D15 to D0.
0x3B	CPH DAC m EXT range 1	0xFFFF	D15 to D0.

Address	Register	Default	Data Bits, MSB First
0x3C	CPH DAC c EXT range 1	0x8000	D15 to D0.
0x3D	DGS DAC	0x3333	D15 to D0 DUTGND SENSE DAC, 0 V to 5 V range.
0x3E	Ramp end code	0x0000	D15 to D0, this is the ramp end code. The ramp start code is the code that is in the FIN DAC register.
0x3F	Ramp step size	0x0001	0000 0000 D6 to D0. D6:D0 set the ramp step size in increments of 16 LSB per code, with a 5 V reference, 16 LSB = 6.1 mV. For example, 000 0000 = 16 LSBs (6.1 mV) step 000 0001 = 16 LSBs (6.1 mV) step ... 111 1111 = 2032 LSBs (775 mV) step.
0x40	RCLK divider	0x0001	0000 0000 D7 to D0. D7:D0 set the RCLK divider. 0000 0000 = ÷ 1 0000 0001 = ÷ 1 0000 0010 = ÷ 2 0000 0011 = ÷ 3 ... 1111 1111 = ÷ 255
0x41	Enable ramp	0x0000	0xFFFF to enable.
0x42	Interrupt ramp	0x0000	0x0000 to interrupt.

Table 25. Alarm Status and Clear Alarm Status Register

Address	Register	Default	Data Bits, MSB first		
0x43	Alarm status	0x0000	This register is a read only register providing information on the status of the alarm functions and the comparator outputs.		
			Bit	Name	Function
			15	$\overline{\text{LTMPALM}}$	Latched temperature alarm bit; if low, this bit indicates alarm event has occurred.
			14	$\overline{\text{TMPALM}}$	Unlatched alarm bit; if low, these bit indicates alarm event is still present.
			13	$\overline{\text{LOSALM}}$	Latched open-sense alarm bit; if low, indicates alarm event has occurred.
			12	$\overline{\text{OSALM}}$	Unlatched open-sense alarm bit; if low, indicates alarm event is still present.
			11	$\overline{\text{LDUTALM}}$	Latched DUTGND Kelvin sense alarm; if low, indicates alarm event has occurred.
			10	$\overline{\text{DUTALM}}$	Unlatched DUTGND Kelvin sense alarm; if low, indicates alarm event is still present.
			9	$\overline{\text{LCLALM}}$	Latched clamp alarm; if low, indicates alarm event has occurred.
			8	$\overline{\text{CLALM}}$	Unlatched clamp alarm; if low, indicates alarm event is still present.
			7	$\overline{\text{LGRDALM}}$	Latched guard alarm; if low, indicates alarm event has occurred.
			6	$\overline{\text{GRDALM}}$	Unlatched guard alarm; if low, indicates alarm event is still present.
			5	CPOL	Comparator output low condition as per the comparator output pin.
			4	CPOH	Comparator output high condition as per the comparator output pin.
			3:0	Unused	Must be zeros.
0x44	Alarm status and clear alarm	0x0000	This register is a read-only register providing information on the status of the alarm functions and the comparator outputs. Reading this register also automatically clears any latched alarm pins or bits.		
			Bit	Name	Function
			15	$\overline{\text{LTMPALM}}$	Latched temperature alarm bit; if low, this bit indicates alarm event has occurred.
			14	$\overline{\text{TMPALM}}$	Unlatched alarm bit; if low, these bit indicates alarm event is still present.
			13	$\overline{\text{LOSALM}}$	Latched open-sense alarm bit; if low, indicates alarm event has occurred.
			12	$\overline{\text{OSALM}}$	Unlatched open-sense alarm bit; if low, indicates alarm event is still present.
			11	$\overline{\text{LDUTALM}}$	Latched DUTGND Kelvin sense alarm; if low, indicates alarm event has occurred.
			10	$\overline{\text{DUTALM}}$	Unlatched DUTGND Kelvin sense alarm; if low, indicates alarm event is still present.
			9	$\overline{\text{LCLALM}}$	Latched clamp alarm; if low, indicates alarm event has occurred.
			8	$\overline{\text{CLALM}}$	Unlatched clamp alarm; if low, indicates alarm event is still present.
			7	$\overline{\text{LGRDALM}}$	Latched guard alarm; if low, indicates alarm event has occurred.
			6	$\overline{\text{GRDALM}}$	Unlatched guard alarm; if low, indicates alarm event is still present.
			5	CPOL	Comparator output low condition as per the comparator output pin.
			4	CPOH	Comparator output high condition as per the comparator output pin.
			3:0	Unused	Must be zeros.
0x45	CPH DAC x1	0xFFFF	D15 to D0.		
0x46	CPH DAC m	0xFFFF	D15 to D0.		
0x47	CPH DAC c	0x8000	D15 to D0.		
0x48	CPL DAC x1	0x0000	D15 to D0.		
0x49	CPL DAC m	0xFFFF	D15 to D0.		
0x4A	CPL DAC c	0x8000	D15 to D0.		
0x4B to 0x7F	Reserved		Reserved.		

READBACK MODE

The AD5560 allows data readback via the serial interface from every register directly accessible to the serial interface, which is all registers except the DAC register (x2 calibrated register). To read back contents of a register, it is necessary to write a 1 to the $\overline{R/W}$ bit, address the appropriate register, and fill the data bits with all zeros.

After the write command has been written, data from the selected register is loaded to the internal shift register and is available on the SDO pin during the next SPI operation.

Address 0x43 and Address 0x44 are the only registers that are read only. The read function gives the user details of the alarm status and the comparator output result.

Alarm flags on latched alarm pins (Pin 1, Pin 2, Pin 3) and bits are cleared after a read command of Register 0x44 (alarm status and clear alarm register (see Table 25).

SCLK frequency for readback does not operate at the full speed of the SPI interface. See the Timing Characteristics section for further details.

DAC READBACK

The DAC x1, DAC m, and DAC c registers are available to read back via the serial interface. Access to the calibrated x2 register is not available.

POWER-ON DEFAULT

During power-on, the power-on state machine resets all internal registers to their default values and \overline{BUSY} goes low. A rising edge on \overline{BUSY} indicates that the power-on event is complete and that the interface is enabled. The \overline{RESET} pin has no function in the power-on event.

During power-on, all DAC x1 registers corresponding to 0 V are cleared, the calibration register default corresponds to m at full scale and to c at zero scale.

The default condition of the DPS and the system control registers are as shown in the relevant tables, see Table 17 through Table 26.

During a \overline{RESET} function, all registers are reset to the power-on default.

AD5560

Table 26. AD5560 Truth Table of Switches¹

Reg	Bit Name	Bit	SW1	SW2	SW3	SW4	SW7	SW13	SW14	SW15	SW5	SW6	SW8	SW9	SW11	SW16
System Control Register	Gain 0, Gain 1		X	X	X	X	X	X	X	X	X	X	X	X	X	X
	FINGND	0	B	X	X	X	X	X	X	X	X	X	X	X	X	X
		1	A	X	X	X	X	X	X	X	X	X	X	X	X	X
	CPO		X	X	X	X	X	X	X	X	X	X	X	X	X	X
	PD ^{2, 3}		X	X	X	X	X	X	X	X	X	X	X	X	X	On
DPS Register 1	SW-INH ²	0 ⁴	X	c	X	X	X	X	X	X	X	X	X	X	X	X
		1 ⁵	X	a	X	X	X	X	X	X	X	X	X	X	X	X
	I2, I1, I0	000	X	X	X	On	On	Off	Off	Off	X	X	X	X	X	X
		001	X	X	X	On	On	Off	Off	Off	X	X	X	X	X	X
		010	X	X	X	On	On	Off	Off	Off	X	X	X	X	X	X
		011	X	X	X	On	On	Off	Off	Off	X	X	X	X	X	X
		100	X	X	X	On	On	Off	Off	Off	X	X	X	X	X	X
		101	X	X	X	Off	Off	Off	On	On	X	X	X	X	X	X
		110	X	X	X	Off	Off	On	Off	On	X	X	X	X	X	X
		111	X	X	X	Off	Off	On	Off	On	X	X	X	X	X	X
	CMP1, CMP0	00	X	X	X	X	X	X	X	X	X	X	X	X	X	X
		01	X	X	X	X	X	X	X	X	X	X	X	X	X	X
		10	X	X	a	X	X	X	X	X	X	X	X	X	X	X
		11	X	X	b	X	X	X	X	X	X	X	X	X	X	X
	ME3, ME2, ME1, ME0	000	X	X	X	X	X	X	X	X	X	X	X	X	X	Off
		001	X	X	X	X	X	X	X	X	X	X	X	X	X	On
		010	X	X	X	X	X	X	X	X	X	X	X	X	X	On
		011	X	X	X	X	X	X	X	X	X	X	X	X	X	On
		100	X	X	X	X	X	X	X	X	X	X	X	X	X	On
		101	X	X	X	X	X	X	X	X	X	X	X	X	X	On
		110	X	X	X	X	X	X	X	X	X	X	X	X	X	On
		111	X	X	X	X	X	X	X	X	X	X	X	X	X	On
DPS Register 2	SFO	0	X	X	X	X	X	X	X	X	X	X	Off	Off	X	X
		1	X	X	X	X	X	X	X	X	X	X	On	On	X	X
	Bit[10:9]	00 ⁶	b	a	X	X	X	X	X	X	a	Off	X	X	X	X
		01 ⁷	b	a	X	X	X	X	X	X	b	Off	X	X	X	X
		10 ⁸	c	c	X	X	X	X	X	X	Off	On	X	X	X	X
		11 ⁹	c	b	X	X	X	X	X	X	Off	On	X	X	X	X
	INT10K	0	X	X	X	X	X	X	X	X	X	X	X	X	Off	X
		1	X	X	X	X	X	X	X	X	X	X	X	X	On	X
Hardware Pins	HW_INH ²		X	c	X	X	X	X	X	X	X	X	X	X	X	X
		CLEN	X	X	X	X	X	X	X	X	X	X	X	X	X	X

¹ X = don't care; the switch is unaffected by the particular bit condition.

² Active low.

³ Power-down mode; used for low power consumption.

⁴ Force amplifier outputs tristate, low leakage mode; feedback made around amplifier.

⁵ FV mode.

⁶ Master: MASTER_OUT = internally connects to active EXTFORCE1/EXTFORCE2/25 mA output.

⁷ Master: MASTER_OUT = master MI.

⁸ Slave FV: EXTFORCE1/EXTFORCE2/25 mA connected internally to close FVAMP loop.

⁹ Slave FI.

USING THE HCAV_{DDX} AND HCAV_{SSX} SUPPLIES

The first set of power supplies, AV_{DD} and AV_{SS} provide power to the DAC levels and associated circuitry. They also supply the force amplifier stage for the low current ranges (ranges using internal sense resistors up to 25 mA maximum).

The second set of power supplies, HCAV_{SS1} and HCAV_{DD1} are intended to be used to minimize power consumption in the AD5560 device for the EXTFORCE1 range (up to ± 1.2 A). Similarly, the HCAV_{SS2} and HCAV_{DD2} supplies are used for the EXTFORCE2 range (up to ± 500 mA). These supplies must be less than or equal to the AV_{DD} and AV_{SS} supplies. When driving high currents at low voltages, power can be greatly minimized by ensuring that the supplies are at the lowest voltages.

Therefore, HCAV_{SSX} and HCAV_{DDX} can be switched externally to different power rails as required by the set voltage range. However, the design of the high current output stage means that these supplies always have to be at a higher voltage than the forced voltage irrespective of the current range being used. Therefore, depending on the level of supply switching, external diodes may be required in series with each of the HCAV_{DDX} and HCAV_{SSX} supplies, as shown in Figure 57. There are

internal pull-up resistors between the supplies (see Figure 57). Using diodes here allows a more flexible use of supplies and can minimize the amount of supply switching required. In the example, the AV_{DD} and AV_{SS} supplies can support the high voltage needs, while the HCAV_{DDX} and HCAV_{SSX} supplies support the low voltage, higher current ranges. Diode selection should take into account the current carrying requirements. Supply selection for HCAV_{DDX} and HCAV_{SSX} supplies needs to allow for this extra voltage drop.

POWER SUPPLY SEQUENCING

When the supplies are connected to the AD5560, it is important that the AGND and DGND pins be connected to the relevant ground plane before the positive or negative supplies are applied. In most applications, this is not an issue as the ground pins for the power supplies are connected to the ground pins of the AD5560 via ground planes. The AV_{DD} and AV_{SS} supplies must be applied to the device either before or at the same time as the HCAV_{DDX} and HCAV_{SSX} supplies, as indicated in Table 3. There are no known supply sequences surrounding the DV_{CC} supply, although it is recommended that it be applied as indicated by the absolute maximum ratings (see Table 3).

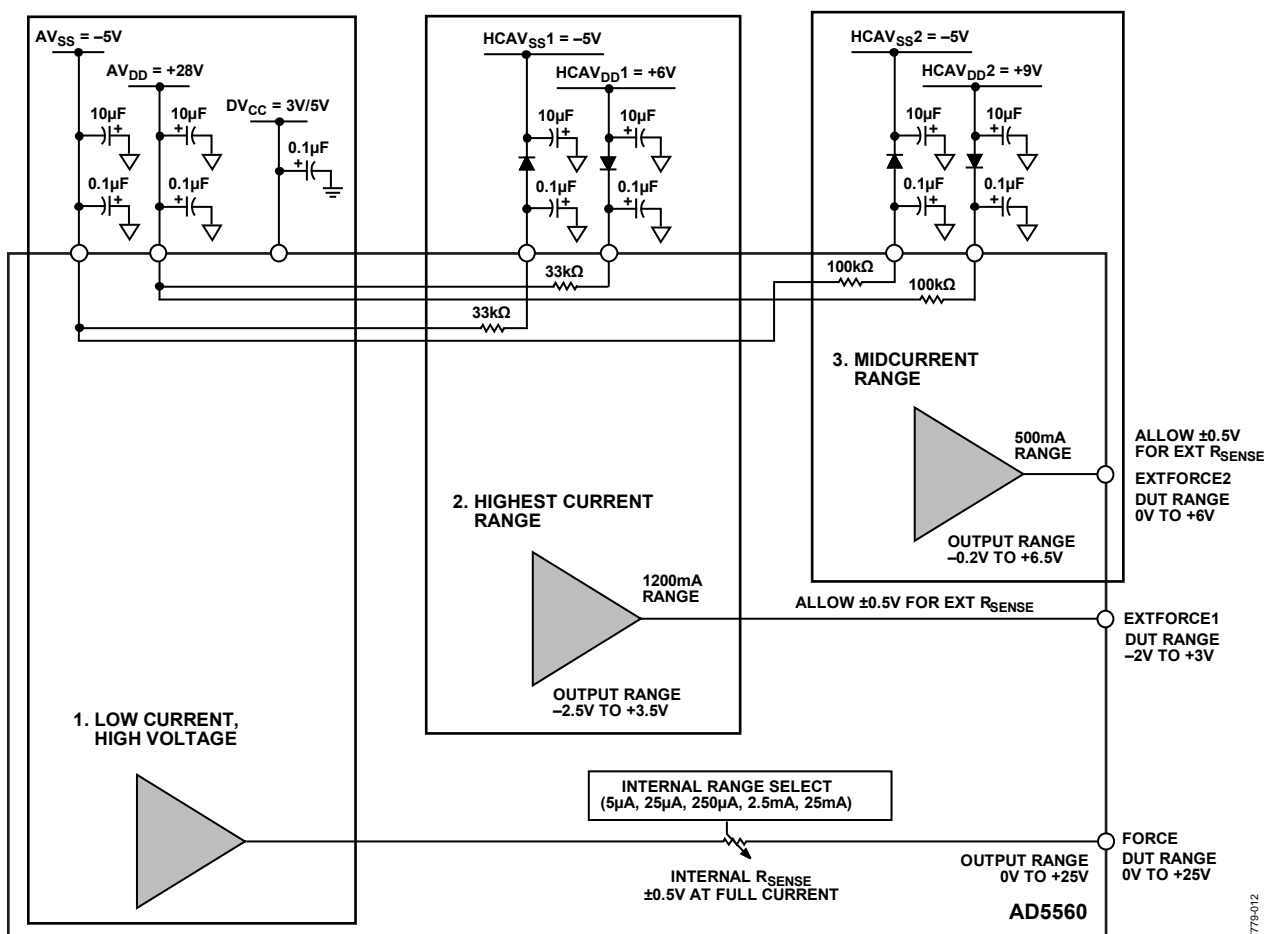


Figure 57. Example of Using the Extra Supply Rails Within the AD5560 to Achieve Multiple Voltage/Current Ranges

AD5560

REQUIRED EXTERNAL COMPONENTS

The minimum required external components are shown in the block diagram in Figure 58. Decoupling is very dependent on the type of supplies used, the board layout, and the noise in the system. It is possible that less decoupling may be required as a result. While there are four compensation input pins and five

feedforward capacitor inputs pins, a user may only need to use all capacitor inputs if they intend to drive large variations of DUT load capacitances. If the DUT load capacitance is known and doesn't change for all combinations of voltage ranges and test conditions, then it is possible only one set of C_{Cx} and C_{Fx} is required.

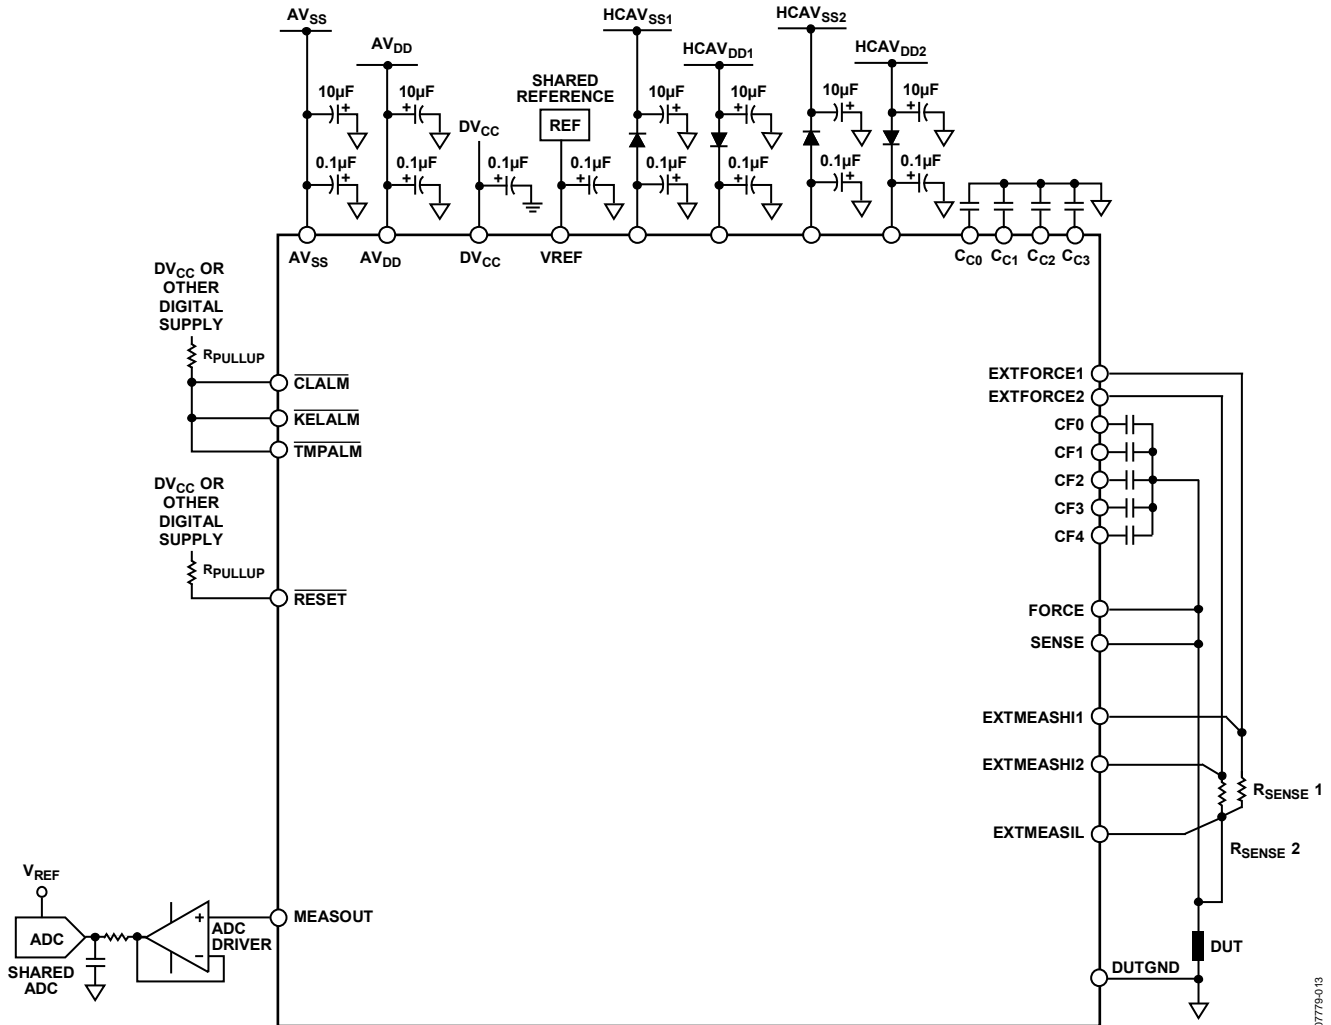


Figure 58. External Components Required for Use with the DPS

Table 27. References Suggested for Use with the AD5560¹

Part No.	Voltage (V)	Initial Accuracy %	Ref Out Tempco (ppm/°C max) A/B Grade	Ref Output Current (mA)	Supply Voltage Range (V)	Package
ADR431	2.5	±0.04	10/3	30	4.5 to 18	MSOP, SOIC
ADR435	5	±0.04	10/3	30	7 to 18	MSOP, SOIC
ADR441	2.5	±0.04	10/3	10	3 to 18	MSOP, SOIC
ADR445	5	±0.04	10/3	10	5.5 to 18	MSOP, SOIC

¹ Subset of the possible references suitable for use with the AD5560. See www.analog.com/references for more options.

POWER SUPPLY DECOUPLING

In any circuit where accuracy is important, careful consideration of the power supply and ground return layout helps to ensure the rated performance. The printed circuit board on which the AD5560 is mounted should be designed so that the analog and digital sections are separated and confined to certain areas of the board. If the AD5560 is in a system where multiple devices require an AGND-to-DGND connection, the connection should be made at one point only. The star ground point should be established as close as possible to the device. The DGND connection in the AD5560 should be treated as AGND and returned to the AGND plane. For more detail on decoupling for mixed signal applications, refer to Analog Devices Tutorial MT 031.

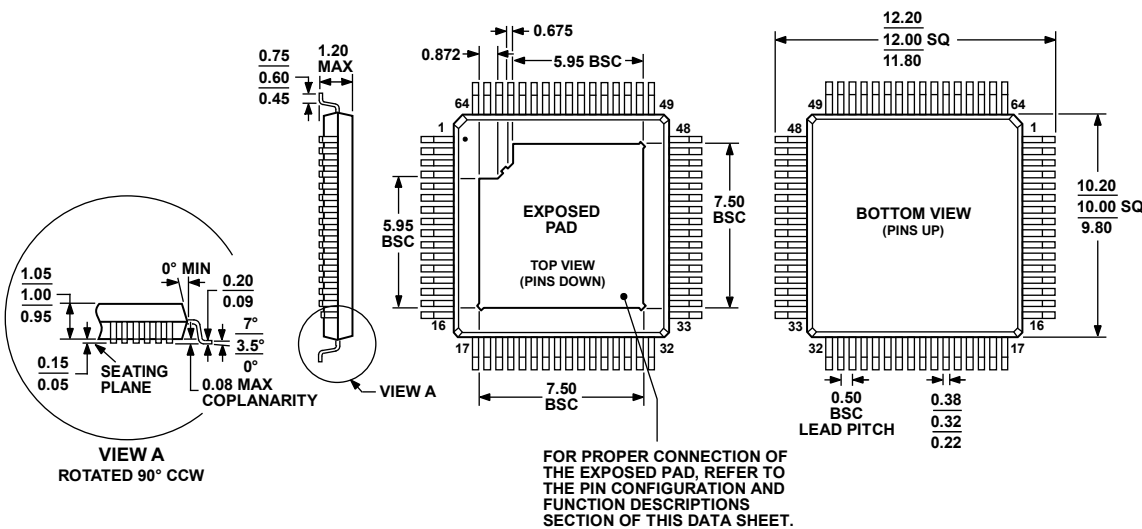
For supplies with multiple pins (AV_{SS} , AV_{DD} , DV_{CC}), it is recommended to tie these pins together and to decouple each supply once.

The AD5560 should have ample supply decoupling of 10 μF in parallel with 0.1 μF on each supply located as close to the part as possible, ideally right up against the device. The 10 μF capacitors are the tantalum bead type. The 0.1 μF capacitor should have low effective series resistance (ESR) and effective series inductance (ESL), such as the common ceramic capacitors that provide a low impedance path to ground at high frequencies to handle transient currents due to internal logic switching.

Digital lines running under the device should be avoided because these couple noise onto the device. The analog ground plane should be allowed to run under the AD5560 to avoid noise coupling. The power supply lines of the AD5560 should use as large a trace as possible to provide low impedance paths and reduce the effects of glitches on the power supply line. Fast switching digital signals should be shielded with digital ground to avoid radiating noise to other parts of the board and should never be run near the reference inputs. It is essential to minimize noise on all VREF lines. Avoid crossover of digital and analog signals. Traces on opposite sides of the board should run at right angles to each other. This reduces the effects of feedthrough throughout the board. As is the case for all thin packages, care must be taken to avoid flexing the package and to avoid a point load on the surface of this package during the assembly process.

Also note that the exposed paddle of the AD5560 is internally connected to the negative supply AV_{SS} .

OUTLINE DIMENSIONS



COMPLIANT TO JEDEC STANDARDS MS-026-ACD-HU
Figure 59. 64-Lead Thin Quad Flat Package, Exposed Pad [TQFP_EP]
(SV-64-3)
Dimensions shown in millimeters

ORDERING GUIDE

Model	Temperature Range ¹	Package Description	Package Option
AD5560JSVUZ ² EVAL-AD5560EBUZ ²	T _J = 25°C to +90°C	64-Lead Thin Quad Flat Pack with Exposed Pad (TQFP_EP) Evaluation Kit	SV-64-3

¹ T_J = junction temperature.
² Z = RoHS Compliant Part.