







ADDRESS

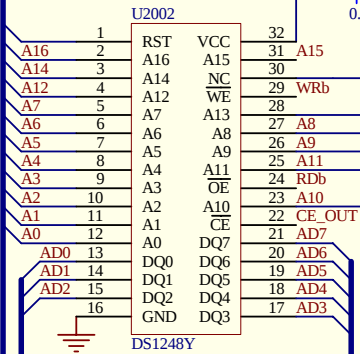





For DS1243, DS1244, 28 pin devices
jumper JP2000 to pins 2-3.
For DS1248, 32 pin devices
Jumper JP2000 to pins 1-2.



JP2001 Selects the use of pin 28 of U2002.
It connects pin 28 with VCC, A13, IRQb.
It allows a single jumper to select the
input of pin 28.

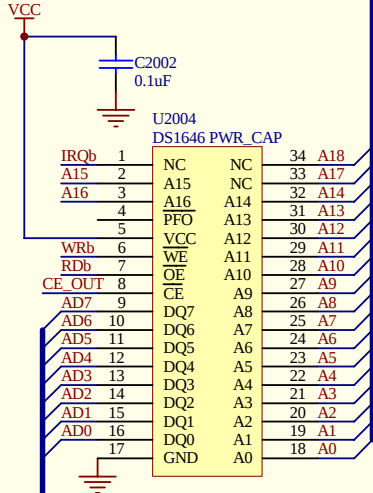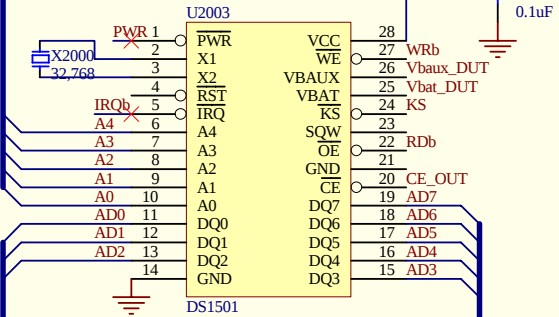

Layout PCB for
surface
mount socket

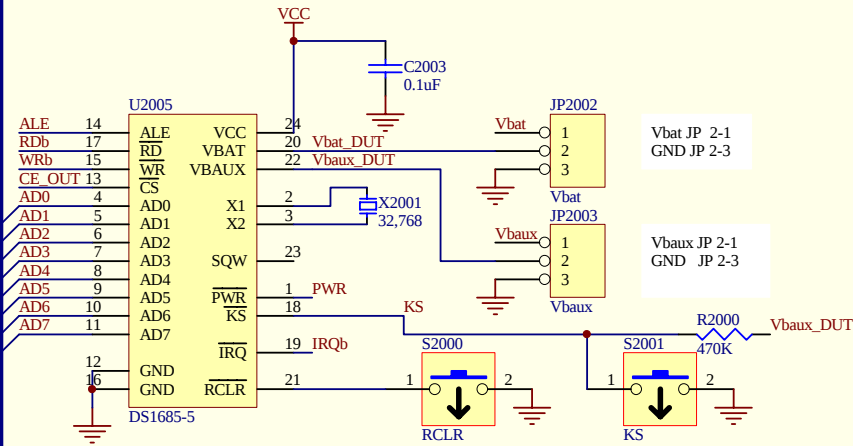

Design Engineer _____ Date _____
Project Manager _____ Date _____

Revision History:			
Ltr:	Description:	Date:	Approved by:
A	New Design	9/26/02	CR

Title **RTC Reference Design - R.T.C. Inf.**

Size: **Tabloid** Number**1** Revision:

Date: 8-Oct-2002 Time: 07:22:44 Sheet**2** of 2

File: F:\Boards\Applications\Rtc_ref_design.ddb - Documents\Sheet2.sch